V4 / 220 kV INTEGRATED

Kashi Lake City

A residential-led estate organised around the actual V2 high-tension alignment: a 35 m planning green/no-build strip, two candidate 9 m flank roads and five retained lifestyle uses.


41.31 ac	434	15.01%	35 m	18
gross site	working plot target	green incl. HT belt	base HT planning strip	new visual stories

Concept / Investor presentation issue - not for survey, sanction drawing, title plan or construction issue

Station Varanasi | 05 Sep 2026

The original V2 geometry, corrected around the HT line

The thin green diagonal is the 220 kV centreline. The broad grey diagonal remains the primary road.

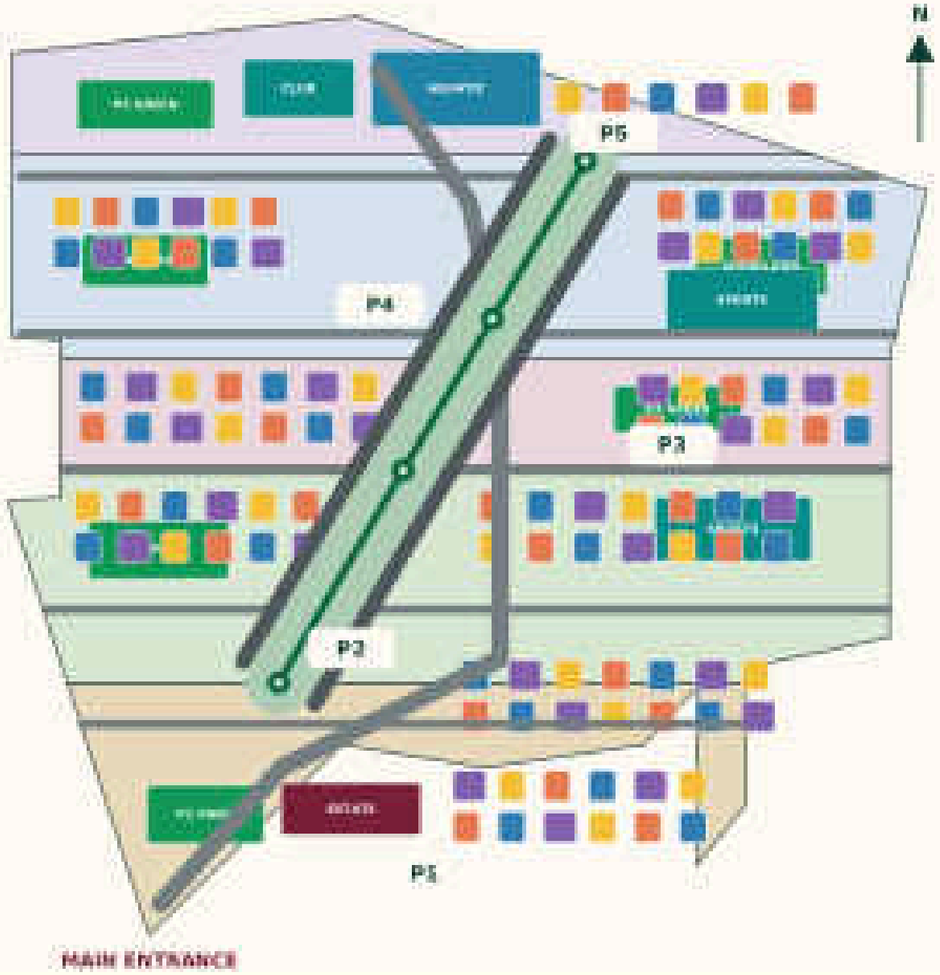

V4 CONTROL SUMMARY

434 plots
working target retained through redistribution

71,260 m2
residential development account

25,100 m2
total green · counted once

11,236.91 m2
HT corridor share of total green

2 x 9 m
candidate flank roads within road budget

4 amenity codes
club, sports, estate/admin, aquatic

Plot numbering follows survey. No plot is intentionally placed inside the 53 m combined HT-and-roads band.

The whole estate is organised by the green power-line spine


Artist's impression for design direction; final geometry, levels and planting remain subject to detailed design.



True bird's-eye artist's impression. The external water body and surrounding landscape are illustrative and are not a surveyed site context.

The actual HT line runs at 59.58 degrees

Measured from the original V2 thin green centreline - not from the grey primary road.

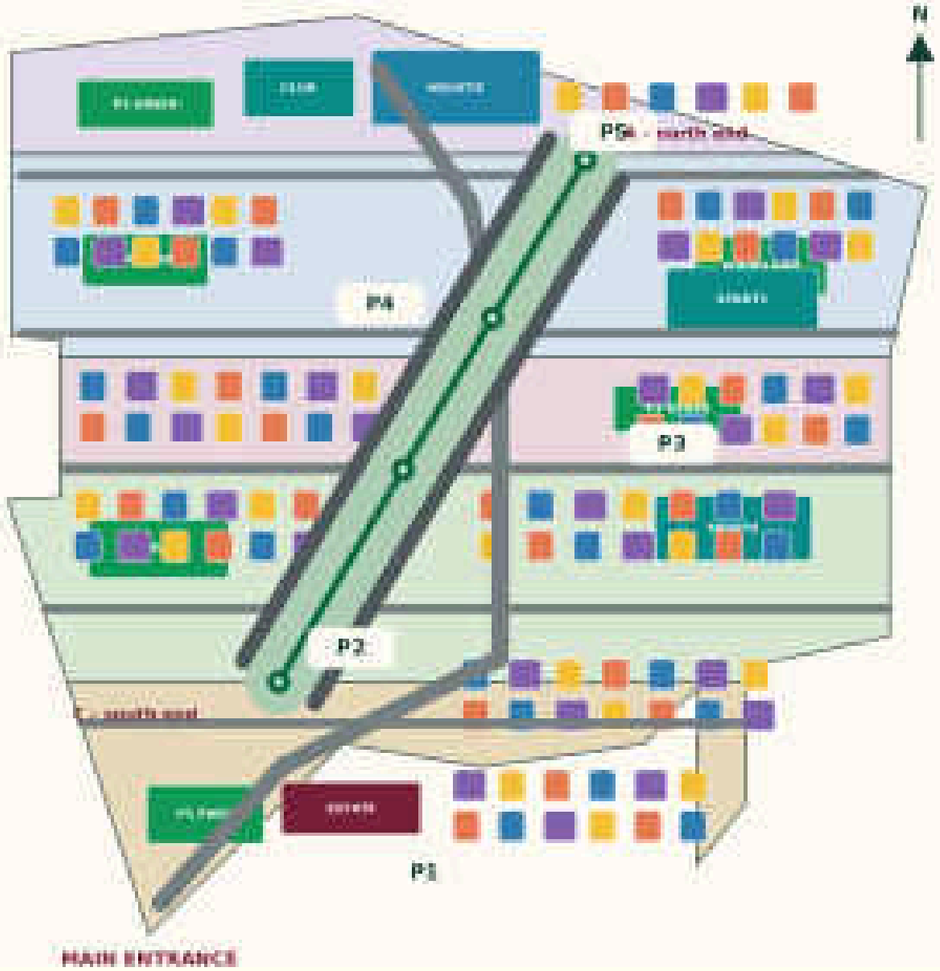

EXTRACTED V2 GEOMETRY

Control	Value
Centreline angle	59.578 deg
Plan length	821.05 m
Base corridor	35.00 m total
Half-width	17.50 m each side
Flank roads	9.00 m each side
Combined band	53.00 m
50 ft comparison	15.24 m - insufficient

The 35 m strip is a planning control reference. Obtain a total-station/cadastral survey and the transmission-line owner's written corridor, tower, sag and swing confirmation before freezing roads or plots.

The HT corridor affects P2, P3 and P4 most

11,236.91 m2
35 M GREEN CORRIDOR

5,778.99 m2
TWO 9 M FLANK ROADS

17,015.89 m2
COMBINED 53 M BAND

321.05 m
DIAGRAM-NORMALISED LENGTH

Phase	35 m HT green m2	53 m HT + roads m2	Planning response
P1	86.39	200.82	Entrance geometry only; protect sightline
P2	4,376.35	6,859.80	Replot clusters on both sides; active sport off corridor
P3	2,332.40	3,531.85	Use crossing node; no plot or built amenity in band
P4	4,305.04	6,303.82	Replot clusters; quiet sport beyond road edge
P5	36.73	119.63	Protect aquatic/sub approach
TOTAL	11,236.91	17,015.89	Survey-certified overlay required

Green accounting: the 11,236.91 m2 HT strip uses 44.77% of the 25,100 m2 green budget; 13,863.09 m2 remains for distributed parks. The corridor is counted once, never again as road or amenity land.

Keep buildings beyond the roads, not merely 50 feet away

A conservative concept section reserves 17.5 m each side of centreline, then a 9 m road on each side.

CONCEPT CROSS-SECTION - NOT TO SCALE



17.5 m + 17.5 m = 35 m BASE PLANNING STRIP

TOTAL CONCEPT CONTROL = 53 m

LANDSCAPE ONLY

- Low planting and lawn
- Walking / cycle path only if approved
- No permanent building
- Maintain tower and patrol access

ROAD INTERFACE

- Roads sit outside confirmed corridor
- Crossings require line-owner review
- Check final road level and conductor sag
- No lighting or trees in electrical envelope

ISSUE CONTROL

- Use 35 m as the base reference
- Check 2023 rules as amended in 2026
- Obtain utility NOC / written line data
- Expand strip where tower or swing requires

The corridor becomes a long, legible landscape address

Artist's impression for design direction; final geometry, levels and planting remain subject to detailed design.



DESIGN INTENT

- Low planting preserves electrical and maintenance clearances.
- Parallel roads keep plots and buildings outside the base corridor.
- Walking and cycling remain subject to line-owner approval.
- Tower access stays visible and unobstructed.

The power-line landscape remains clear after dark

Artist's impression for design direction; final geometry, levels and planting remain subject to detailed design.



Dusk study: low-level lighting is placed outside the electrical envelope and must be coordinated with the line owner.

Family space sits beyond the flank-road edge

Artist's impression for design direction; final geometry, levels and planting remain subject to detailed design.



Park-edge study: active family use is separated from the transmission corridor by the parallel road and controlled planting zone.

Crossings are engineered nodes, not casual road cuts

Artist's impression for design direction; final geometry, levels and planting remain subject to detailed design.



Road-crossing study: tower locations, conductor sag, final road level, drainage and lighting require written technical clearance.

Maintenance access stays continuous and obvious

Artist's impression for design direction; final geometry, levels and planting remain subject to detailed design.



DESIGN INTENT

- Keep tower bases and approach routes unobstructed.
- Use removable barriers only where approved.
- Avoid tall trees, structures and waterlogging near towers.
- Record the maintenance route in the statutory drawing.

Every square metre is assigned once

Deleted commercial, learning and health land is recovered into the residential development account.

41.31 ac
GROSS SITE
167,188.69 m2

42.62%
RESIDENTIAL ACCOUNT
71,260 m2

15.01%
GREEN TOTAL
25,100 m2

25.12%
ROADS
42,000 m2

Land account	Area m2	Area sq ft	% gross	V4 treatment
Residential development parcels	71,260.00	767,038	42.62%	Includes recovered commercial + A03/A04 land
Roads including HT flank roads	42,000.00	452,084	25.12%	5,778.99 m2 flank roads held inside budget
Green including HT corridor	25,100.00	270,174	15.01%	11,236.91 m2 corridor + 13,863.09 m2 parks
Retained amenity campuses	11,500.00	123,785	6.88%	Club, sport, estate/admin, aquatic only
Essential utilities / drainage	5,000.00	53,820	2.99%	Infrastructure, not a lifestyle amenity
Buffers / planning reserve	12,328.69	132,705	7.37%	Survey and approval tolerance
TOTAL	167,188.69	1,799,604	100.00%	41.31 acres


Control equation: 71,260 + 42,000 + 25,100 + 11,500 + 5,000 + 12,328.69 = 167,188.69 m2. No commercial, learning or health/creche campus remains.

434 plots remain the working planning target

The mix is numerically complete; final plot-by-plot placement waits for cadastral and HT survey overlays.

Plot size	Nominal L x B	Count	Achieved mix	Product area sq ft
1,200 sq ft	30 x 40 ft	109	25.12%	130,800
1,500 sq ft	30 x 50 ft	239	55.07%	358,500
1,800 sq ft	30 x 60 ft	22	5.07%	39,600
2,400 sq ft	40 x 60 ft	64	14.75%	153,600
TOTAL	-	434	100.00%	682,500

434-CELL COUNT CHECK

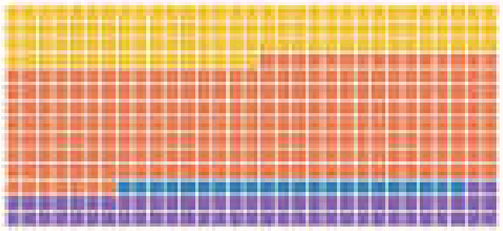

YIELD RECOVERY BRIDGE

- V2 residential nominal account: 63,461.58 m2
- Former net commercial land recovered: 4,268.42 m2
- Former learning + health campuses recovered: 3,500.00 m2
- V4 residential development account: 71,200.00 m2
- Plot product target: 63,408.32 m2; tolerance: 1,853.68 m2

The full plot mix is allocated across all five phases

Counts are inherited from the V2 programme and used as a V4 working target, not a registered inventory.


Phase	Gross m2	1,200	1,500	1,800	2,400	Total	Area sq ft	Phase role
P1	20,225.80	11	25	2	7	45	71,100	Entrance / family park
P2	50,564.00	34	75	7	20	136	213,900	Active sports / central park
P3	25,282.00	19	42	4	11	76	119,400	Residential garden / connector
P4	50,564.00	34	74	7	19	134	210,000	Quiet sport / woodland
P5	20,353.08	11	23	2	7	43	68,100	Clubhouse / aquatic destination
TOTAL	167,188.69	109	239	22	64	434	682,500	Working concept target

CONTROL NOTE

The V2 blocks are unnumbered and schematic, so an exact 'plots lost to HT' number cannot be credibly inferred. V4 instead safeguards the 53 m band, preserves the 434-target arithmetic and identifies 7,853.68 m2 of residential-account tolerance for the surveyed test-fit.

Five phases share one connected estate

Physical completion, sales release and RERA registration must be coordinated but are not the same decision.

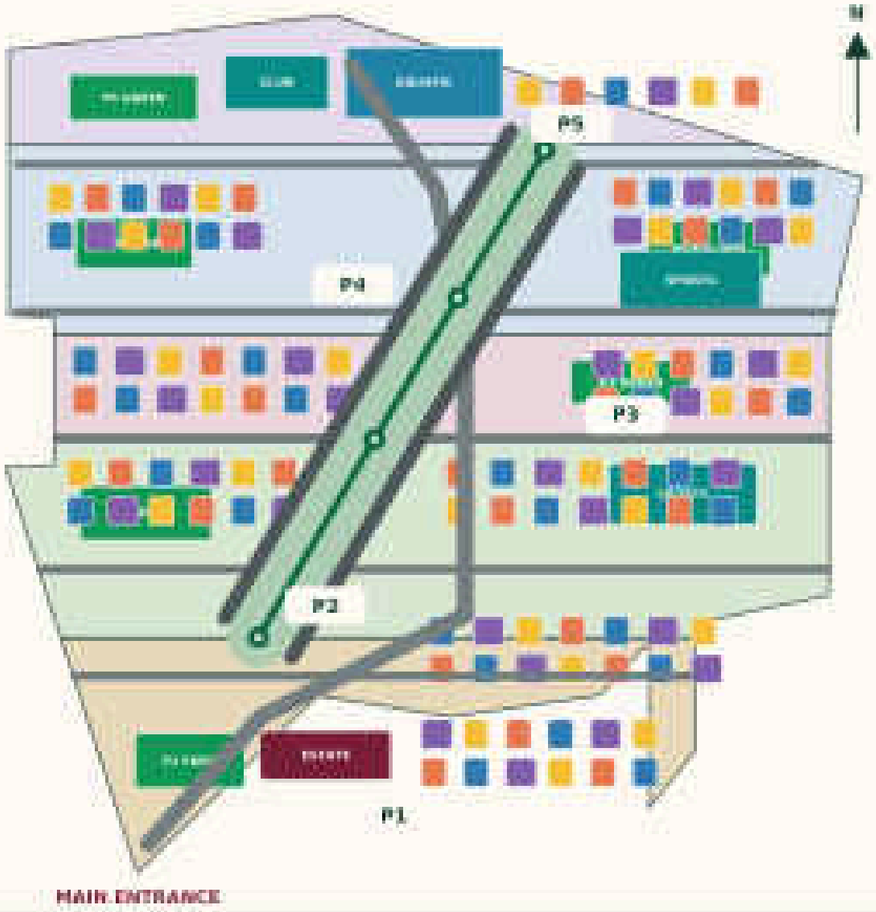

P1 — **45 plots**
Entrance, estate/admin and family park

P2 — **136 plots**
Residential + active sports + central park


P3 — **76 plots**
Residential garden and connector

P4 — **134 plots**
Residential + quiet sports + woodland

P5 — **43 plots**
Clubhouse, aquatic theme and destination green

P1 - 45 plots in the working schedule

Entrance / family park

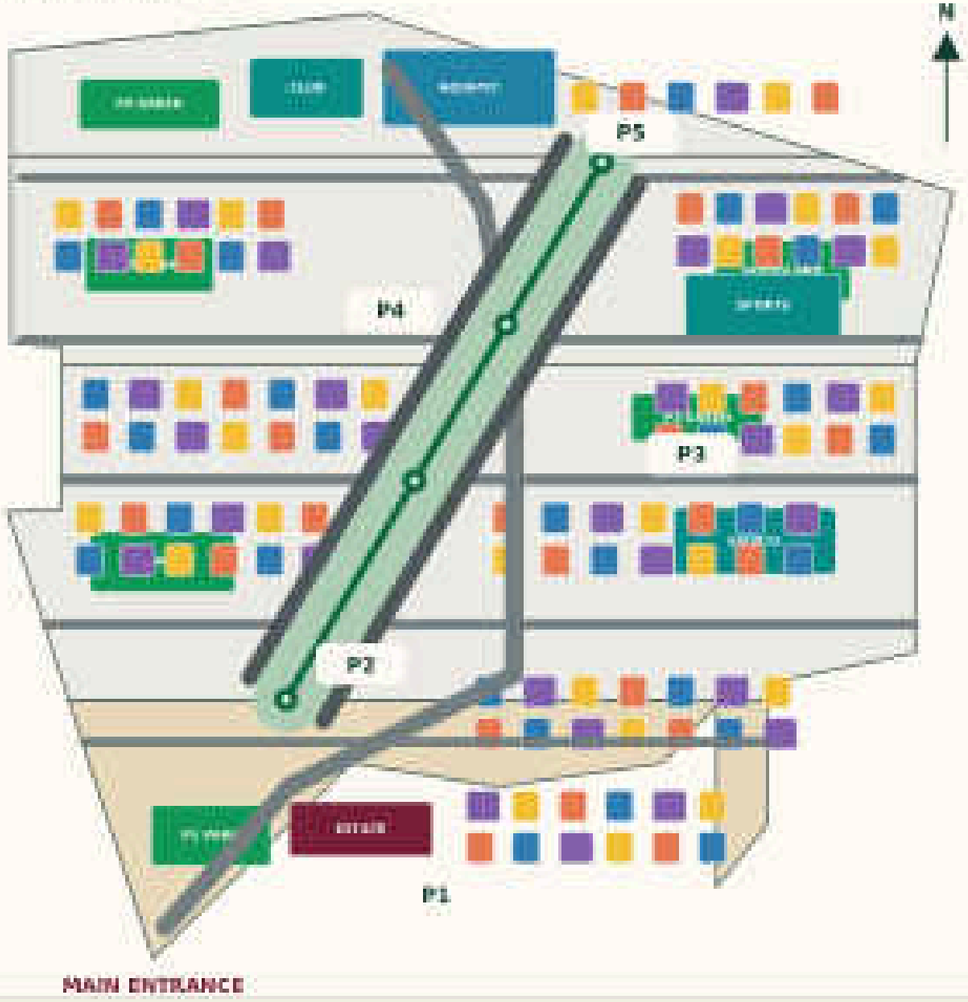

20,225.60 m2
GROSS PHASE


45
WORKING PLOTS

Plot size	Count	Area sq ft
1,200	11	13,200
1,500	25	37,500
1,800	2	3,600
2,400	7	16,800
TOTAL	45	71,100

- Protect entrance hierarchy and estate-office visibility.
- Keep family park connected to first occupation.
- Confirm the very small HT overlap at the north-east edge.

P2 - 136 plots in the working schedule

Active sports / central park

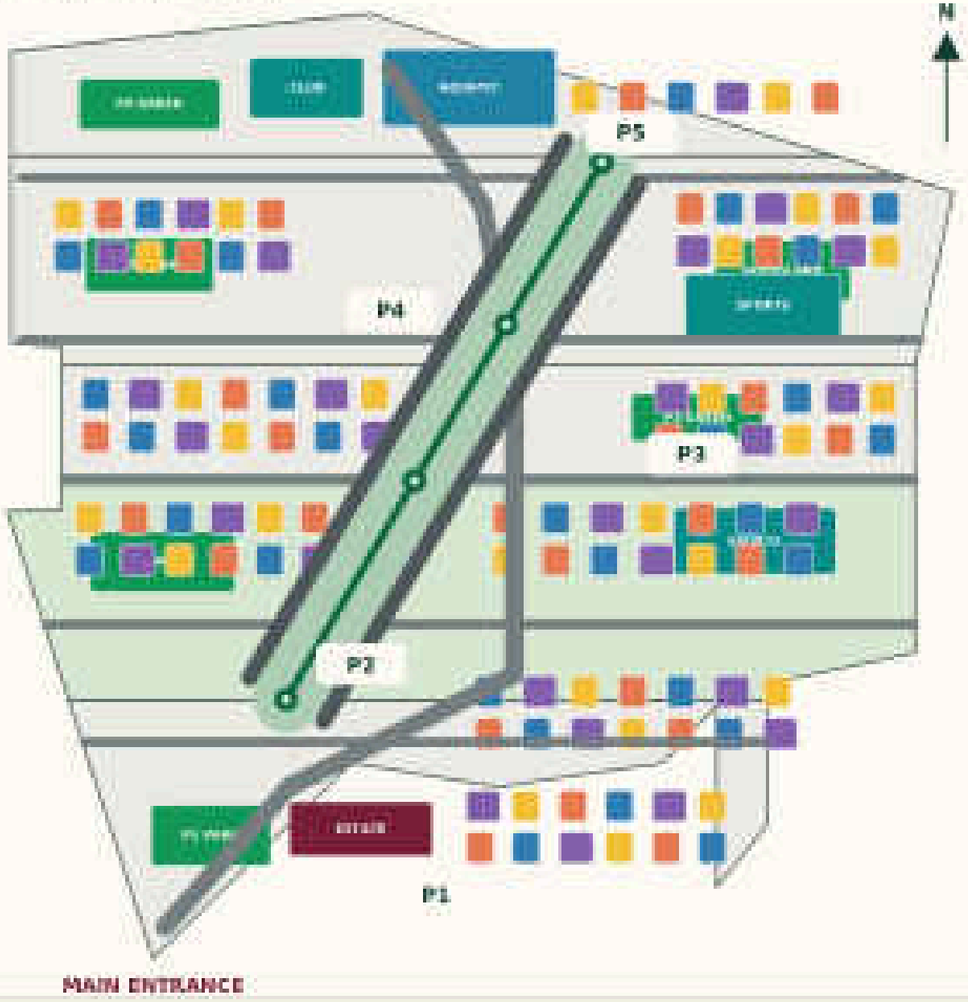

50,564.00 m2
GROSS PHASE


136
WORKING PLOTS

Plot size	Count	Area sq ft
1,200	34	40,800
1,500	35	312,500
1,800	7	12,600
2,400	20	48,000
TOTAL	136	213,900

- Largest HT exposure; replot on both sides of the 53 m band.
- Place active spot beyond the flank road edge.
- Use the corridor as a safe, continuous green address.

P3 - 76 plots in the working schedule

Residential garden / connector

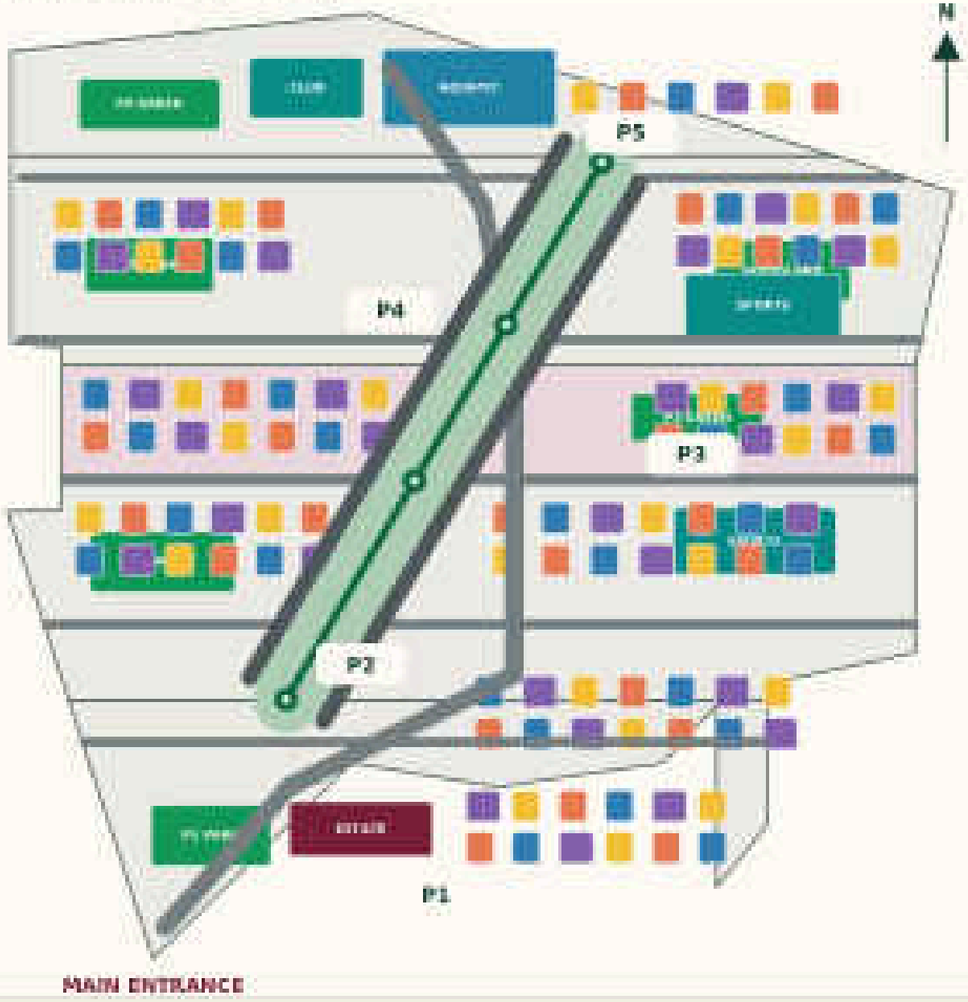

25,282.00 m2
GROSS PHASE


76
WORKING PLOTS

Plot size	Count	Area sq ft
1,200	19	22,800
1,500	42	63,000
1,800	4	7,200
2,400	11	26,400
TOTAL	76	119,400

- Treat the line crossing as an engineered movement node.
- No built amenity or plot inside the combined band.
- Coordinate drainage beneath road crossings.

P4 - 134 plots in the working schedule

Quiet sport / woodland

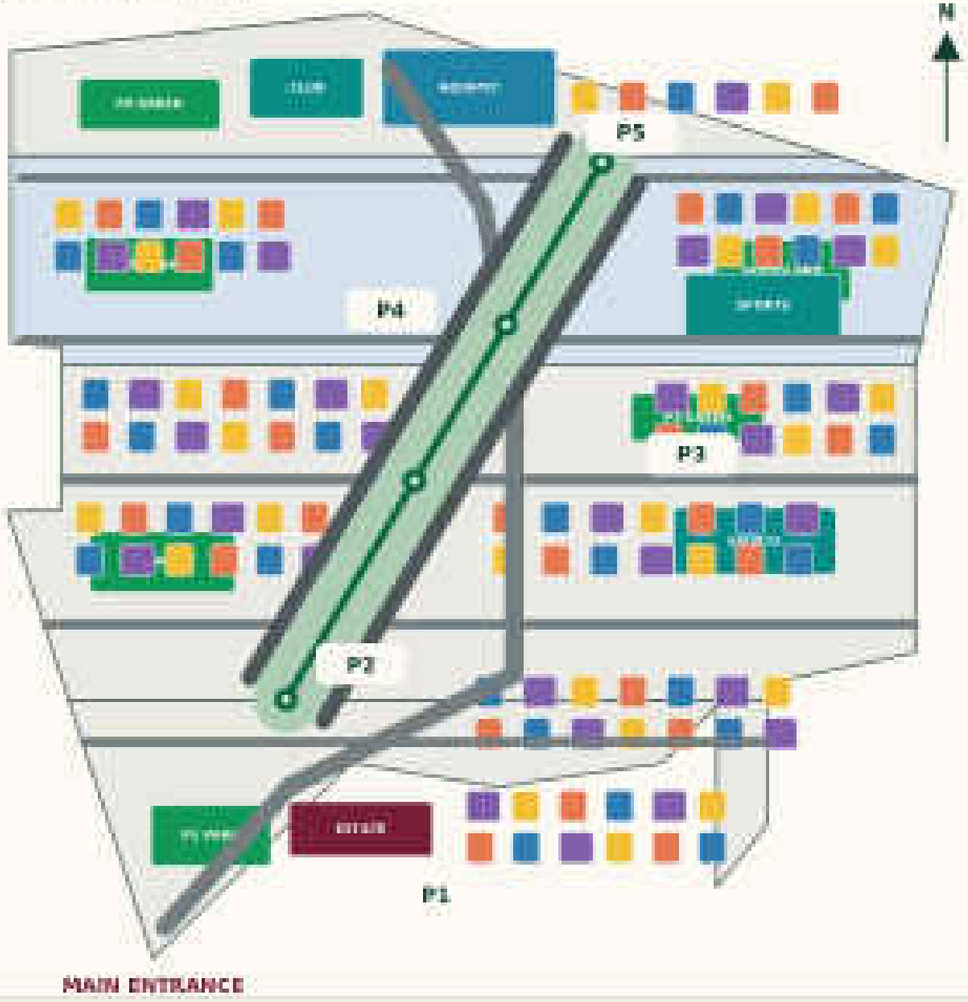

50,564.00 m2
GROSS PHASE


134
WORKING PLOTS

Plot size	Count	Area sq ft
1,200	34	40,800
1,500	74	111,000
1,800	7	12,600
2,400	19	45,600
TOTAL	134	210,000

- Second-largest HT exposure: use clear parallel plot fronts.
- Keep quiet sport and woodland beyond the road edge.
- Maintain tower access without public conflict.

P5 - 43 plots in the working schedule

Clubhouse / aquatic destination

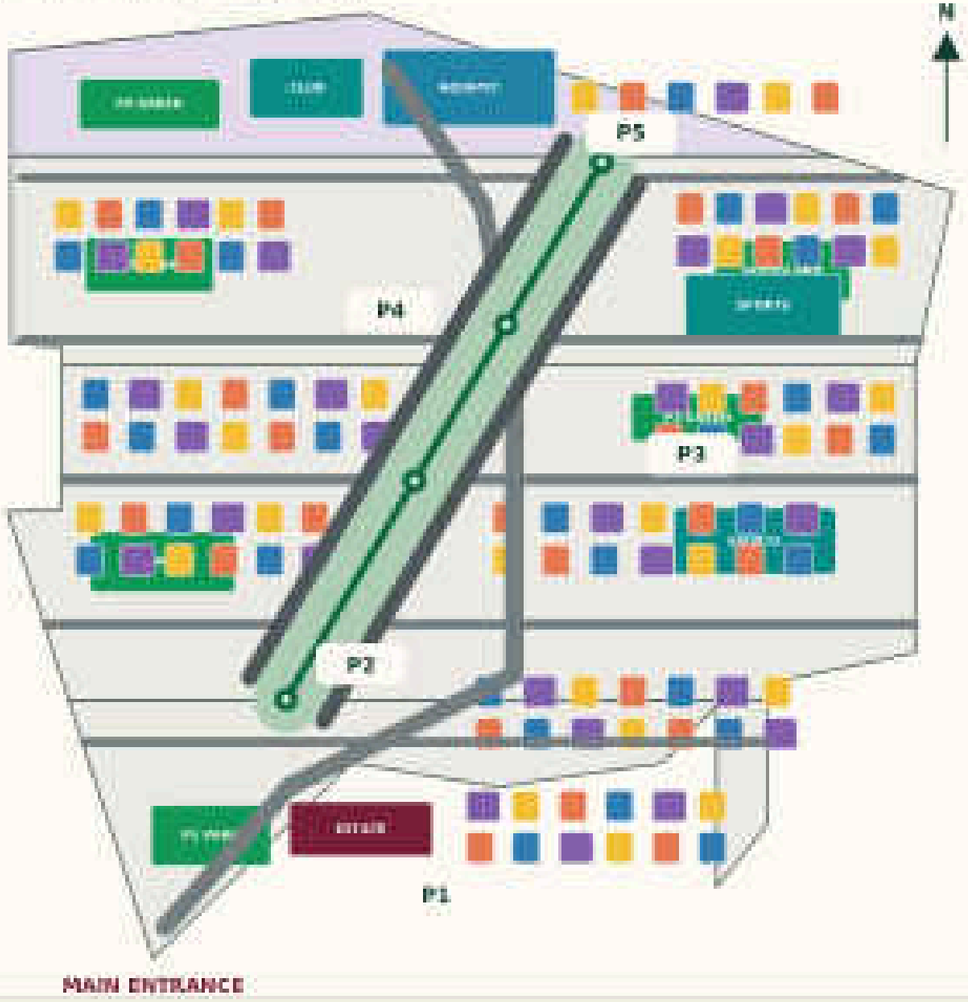

20,553.09 m2
GROSS PHASE

43
WORKING PLOTS

Plot size	Count	Area sq ft
1,200	11	13,200
1,500	23	34,500
1,800	2	3,600
2,400	7	16,800
TOTAL	43	68,100

- Keep club and aquatic precinct outside electrical control.
- Use destination green to frame the north arrival.
- Maintain separation between water systems and fire access.

15.01% green is protected and fully reconciled

25,100 m2
TOTAL GREEN

11,236.91 m2
HT GREEN SPINE

13,863.09 m2
DISTRIBUTED PARKS

0 m2
DOUBLE-COUNTED

Green component	Area m2	Role
220 kV corridor landscape	11,236.91	Continuous tree-planting, no-build green spine
P1 family park	3,400.00	Early occupation / family play
P2 central park	1,900.00	Active neighbourhood green
P3 residential garden	1,000.00	Connector garden
P4 woodland park	2,200.00	Shade and quiet recreation
P5 Grand Green	4,800.00	Destination club / aquatic landscape
Pocket greens and links	1,563.09	Local shade, verges and connectors
TOTAL	25,100.00	15.01% of gross land

The HT flank roads are absorbed inside the road budget

The 42,000 m2 road account is rebalanced; no extra land is claimed for the two parallel roads.

Road control	V2 budget m2	V4 allocation m2	V4 role
R01 - 24 m boulevard	12,800	12,800	Primary arrival and address
R02 - 12 m collectors	9,600	9,600	Phase distribution
R03 - 9 m local streets	14,500	14,500	Includes 5,778.99 m2 HT flank roads
R04 - 7.5 m parks / service loops	3,100	3,100	Park and service access
R05 - junctions / circles	2,000	2,000	Crossings and turning

CROSSING RULE

Roads may cross the line only after checking tower positions, maximum sag, conductor swing, final formation level, drainage, lighting, signage and maintenance access with the line owner and competent electrical authority. The flank roads are a concept arrangement, not an automatic permission.

Only four amenity codes remain

Aquatic theme, clubhouse, sports, green parks and estate/administration - with utilities kept separate.

Code	Retained use	Phase	Area m2	Purpose
A01	Clubhouse	P5	3,000	Lounge, gym, indoor recreation, pool support, event garden
A02	Sports and recreation	P2 / P4	3,500	Active sport plus quiet fitness and recreation
A05	Estate / administration	P1	1,500	Gate, security, helpdesk, estate operations
A06	Aquatic theme	P5	3,500	Water garden, bridge, promenade and planted edges
TOTAL	Four retained campuses	All	11,500	6.88% of gross land

DELETED AND REALLOCATED

A03 Learning (2,000 m2) and A04 Health/crèche (1,500 m2) are removed. Their 3,500 m2 moves into the residential development account. Commercial land is also removed and recovered.

NOT AN AMENITY CUT

Utilities, drainage, water, power, waste, fire access and service yards remain mandatory infrastructure. Their 5,000 m2 account stays intact even though they are not marketed lifestyle uses.

A civic entrance gives the estate a clear address

Artist's impression for design direction; final geometry, levels and planting remain subject to detailed design.



Estate and administration study: gate, security, visitor handling and helpdesk form the first completed facility.

The main boulevard keeps the V2 estate character

Artist's impression for design direction; final geometry, levels and planting remain subject to detailed design.



Boulevard study: shaded walking, planted medians and legible junctions support a premium but buildable street hierarchy.

The clubhouse anchors the P5 destination precinct

Artist's impression for design direction; final geometry, levels and planting remain subject to detailed design.



Clubhouse study: indoor recreation, event garden and pool support are contained within the 3,000 m² AU1 campus.

Water is compact, crossed once and separately counted

Artist's impression for design direction; final geometry, levels and planting remain subject to detailed design.



Aquatic-garden study: the pedestrian bridge is not a road, and the water body is not automatically part of the stormwater system.

Active recreation is concentrated in P2


Artist's impression for design direction; final geometry, levels and planting remain subject to detailed design.



Active-sports study: multi-sport court, fitness and play areas sit outside the HT control and share a managed support core.

Quiet fitness and senior recreation sit in P4

Artist's impression for design direction; final geometry, levels and planting remain subject to detailed design.

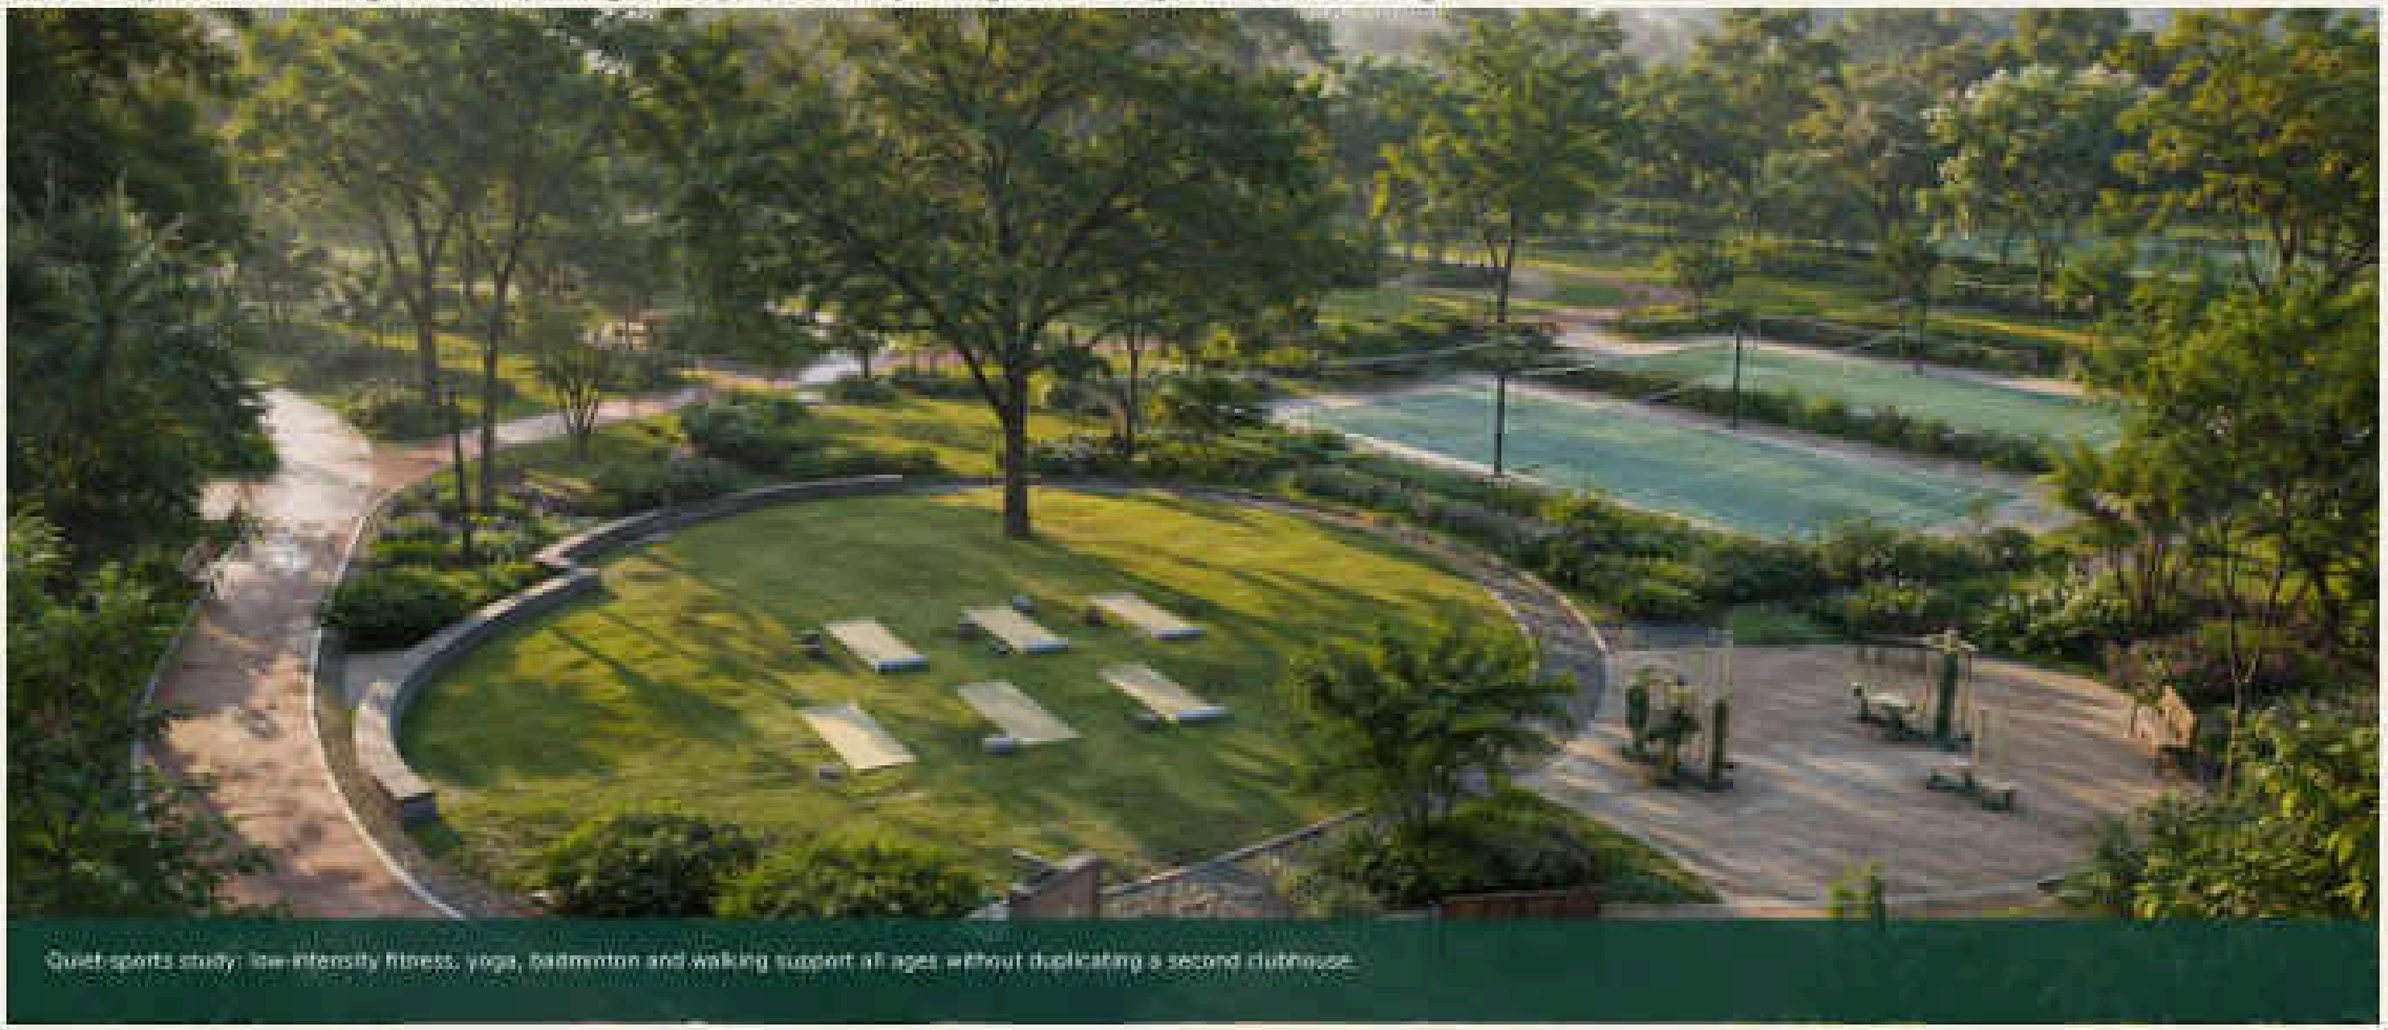

Quiet-sports study: low-intensity fitness, yoga, badminton and walking support all ages without duplicating a second clubhouse.

P1 opens with a usable family park


Artist's impression for design direction; final geometry, levels and planting remain subject to detailed design.



Family park study: visible, shaded and directly connected to early-phase homes and the estate office.

P4 woodland creates shade without entering the HT strip

Artist's impression for design direction; final geometry, levels and planting remain subject to detailed design.

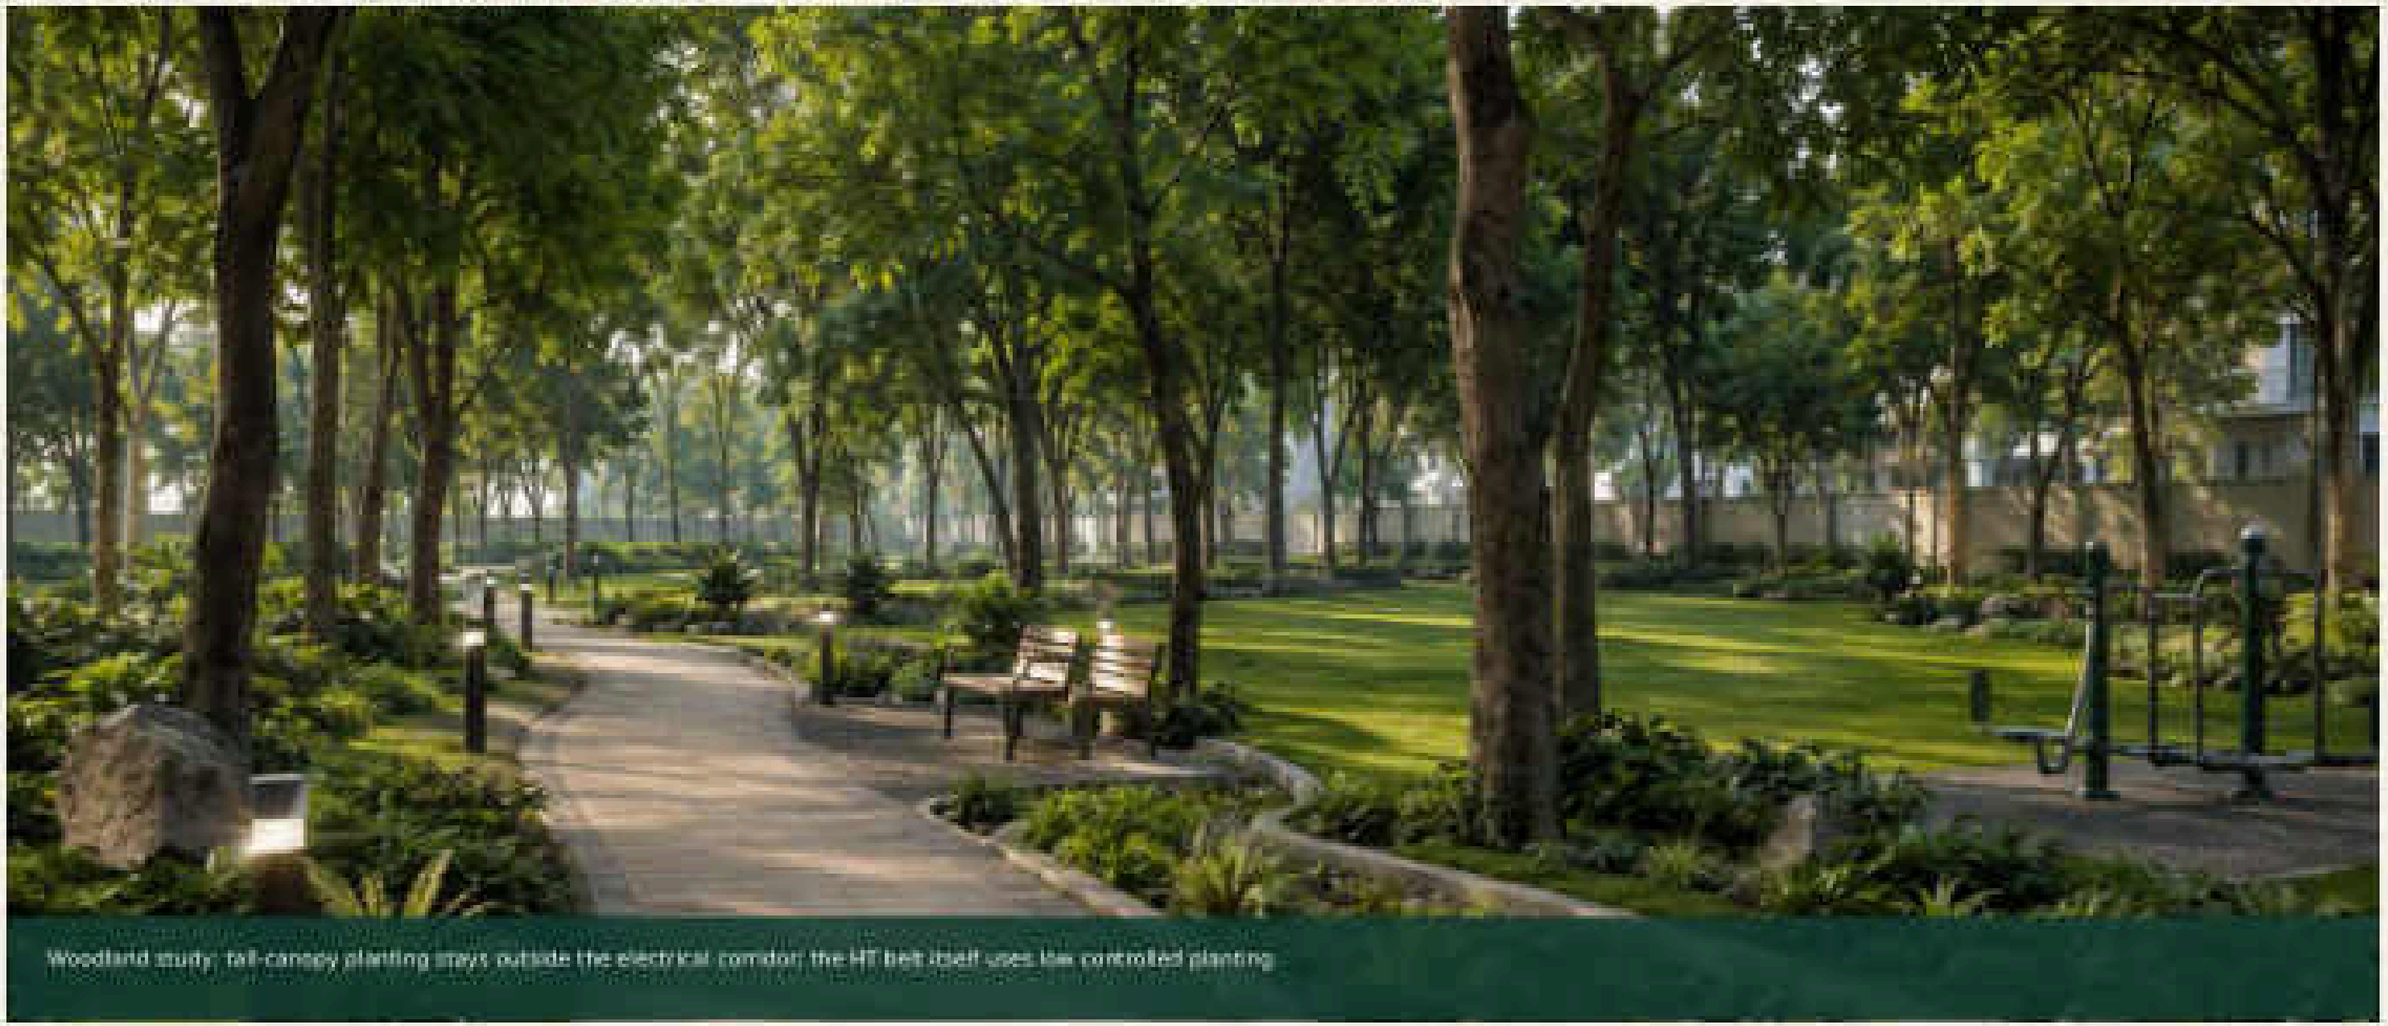

Woodland study: tall-canopy planting stays outside the electrical corridor; the HT belt itself uses low controlled planting.

Plot clusters are re-formed on both sides of the spine

Artist's impression for design direction; final geometry, levels and planting remain subject to detailed design.



Oblique plotted-neighbourhood study. Plot geometry is illustrative; external water and countryside are not surveyed site conditions.

Boundaries stay clear, saleable and serviceable

Artist's impression for design direction; final geometry, levels and planting remain subject to detailed design.



Local-street study: plot fronts, boundary walls, trees, utilities and visitor parking are coordinated as one repeatable module.

The HT spine remains the estate's strongest orientation device

Artist's impression for design direction; final geometry, levels and planting remain subject to detailed design.



Night aerial artist's impression: lighting remains low, controlled and outside the electrical clearance envelope.

Essential services are reserved, not capacity-certified

The 5,000 m2 allowance protects the masterplan; engineering capacities still require specialist design.

System	Planning allowance m2	Preferred location	Next evidence
Sewage treatment / reuse	1,250	P4 edge	Population, flows, treated-water reuse plan
Water storage / treatment / pumps	850	P3 / P5	Source, demand, fire storage and pressure
Electrical / transformers / backup	500	P2 / P4	Load schedule and utility connection
Waste segregation / organic handling	500	P4 edge	Collection route and operating plan
Stormwater / recharge nodes	1,000	Distributed	Levels, catchments and outfall
Maintenance / horticulture yard	500	P2 edge	Vehicle access and screening
TOTAL	5,000	Distributed	Engineering design required

Keep electrical, water and stormwater infrastructure clear of tower foundations, earthing zones and line-owner access. The aquatic feature is a landscape system; it must not be treated as the project stormwater solution without hydraulic proof.

Confirm jurisdiction first; register only the sanctioned plan

The site is stated to lie outside VDA, under a Gram Panchayat / Gram Sabha context. The competent authority must be evidenced.

01 VERIFY LAND

Khasra, title chain, mutation, access, encumbrance and village identity

02 CONFIRM AUTHORITY

Gram Panchayat / Gram Sabha interface, district/revenue and planning jurisdiction

03 SURVEY + HT NOC

Cadastral/topographic survey, line owner, towers, sag/swing and corridor

04 SANCTION

Submit the final statutory layout to the legally competent authority


05 RERA

Register the sanctioned phase, disclosures, promoter rights and completion programme

Submission control	What the concept does	What must be supplied before filing
Masterplan	Shows design intent and land budget	Surveyed, dimensioned and signed statutory layout
HT interface	Reserves a 35 m base strip + Tank roads	Line-owner data/NOC and electrical-safety verification
Land authority	Records non-VDA assumption	Written jurisdiction / competent-authority confirmation
RERA inventory	Carries a 434-plot working target	Sanction-matched plot schedule and phase areas

Resolve the HT and land controls before freezing sales

An 18-24 month indicative sequence is shown for coordination; it is not a possession commitment.

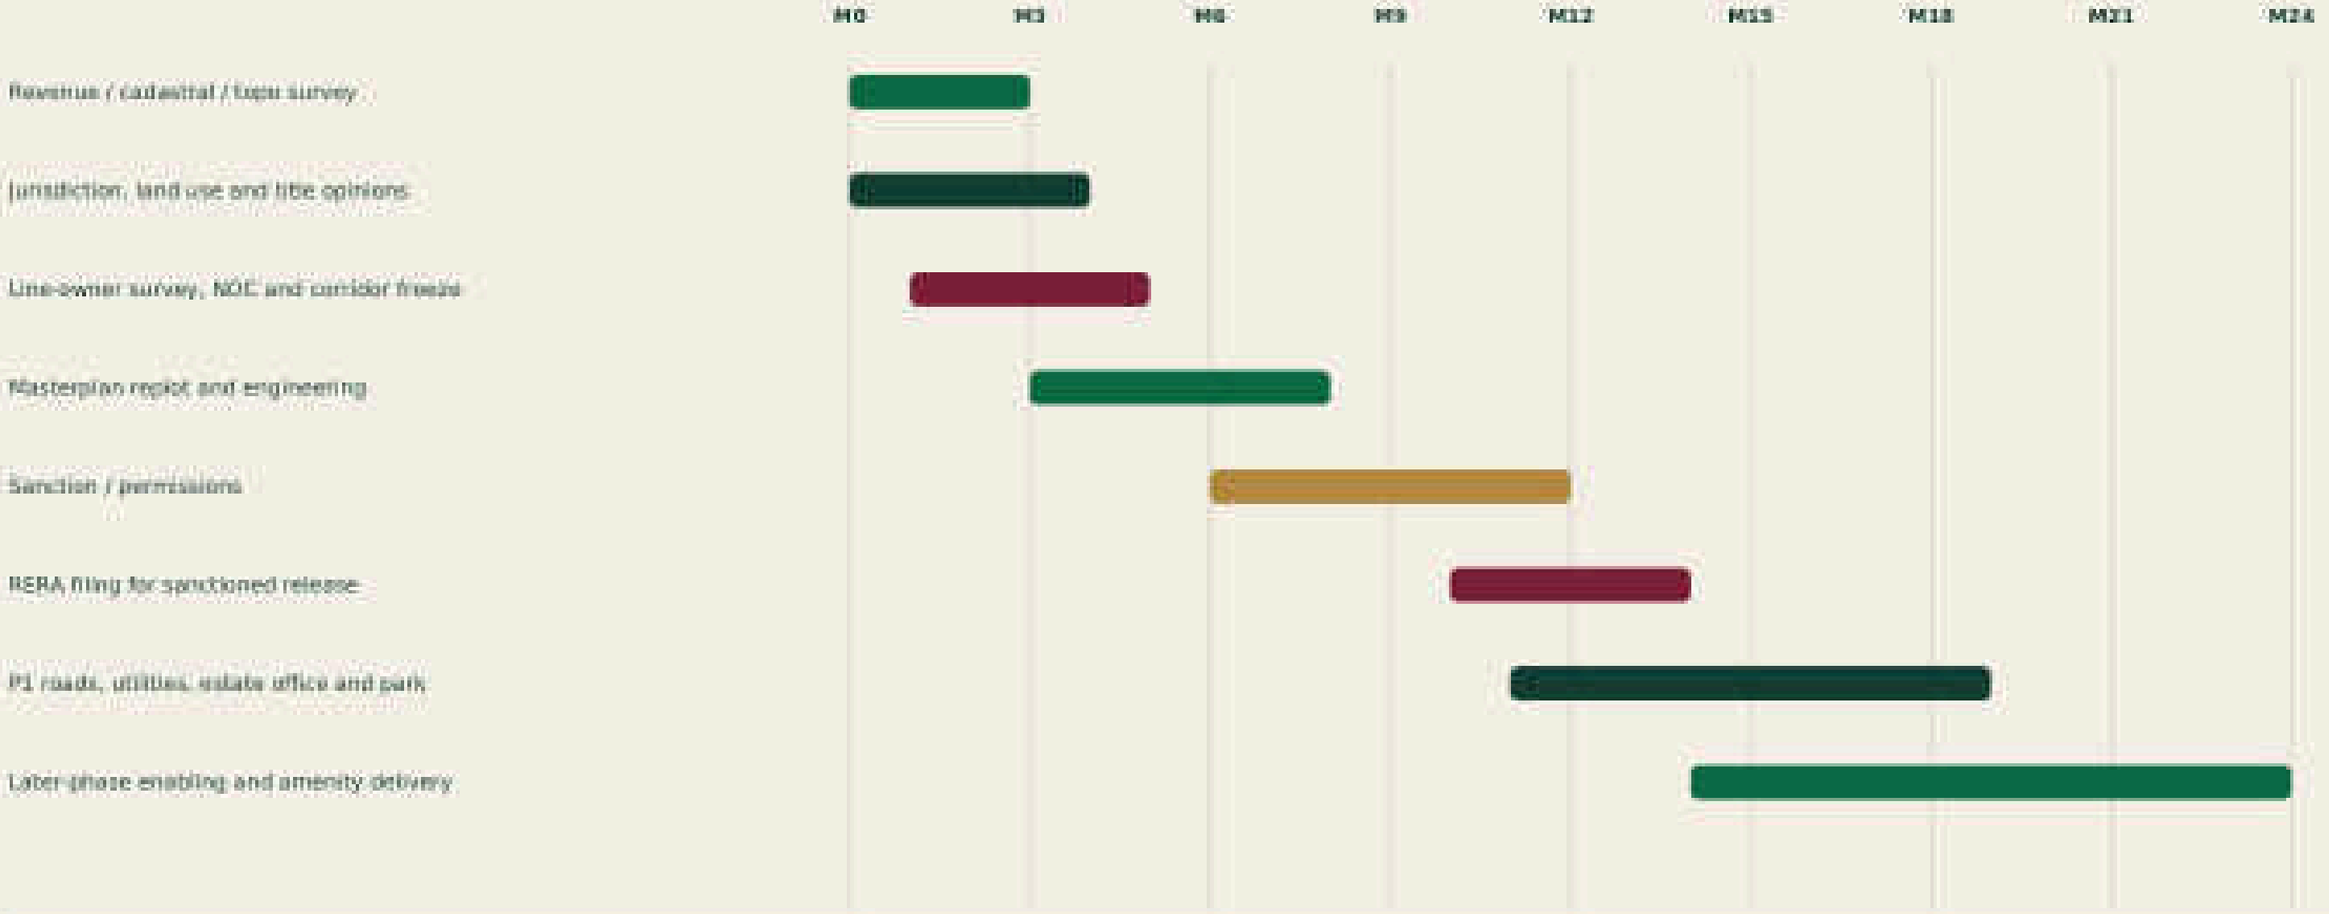

No marketing inventory should outrun the surveyed boundary, competent-authority sanction, HT clearances and phase-specific RERA disclosures.

The concept is coherent; the next issue must be survey-backed

This V4 deck is the design brief for consultants - not the document to register or sell from.

LOCKED CONCEPT DIRECTIONS

- Project name: Kashi Lake City.
- Actual V2 thin green alignment governs the HT control.
- 35-m base corridor plus two candidate 9-m flank roads.
- 25,300 m2 green includes the HT strip once.
- Only aquatic, club, parks, sports and estate/admin remain.
- 434 plots is a working target with a complete numeric mix.

VERIFY BEFORE EXTERNAL ISSUE

- Revenue-village spelling, tehsil, khasra boundary and title.
- Competent authority outside VDA.
- 220 kV line owner, towers, conductors, sag/swing and corridor.
- Road levels, crossings, drainage, lighting and tower access.
- Final plot geometry, green areas and phase-wise RERA inventory.
- All consultant seals, NOCs and statutory forms.

REFERENCE BASIS - CHECK CURRENT TEXT BEFORE FILING

- Sponsor-supplied Kashi V2 Concept Masterplan - gross land, phase geometry, plot schedule and original thin green HT alignment.
- Ministry of Power / MoEF planning reference for transmission line RoW : 35 m for 220 kV under standard conditions.
- Central Electricity Authority (Measures relating to Safety and Electric Supply) Regulations, 2023, read with the 2026 amendment and current schedules.
- UP-RERA Act/rules, portal checklists and directions current on the date of filing.
- Applicable Uttar Pradesh rural/local planning, revenue, land-use and Gram Panchayat / Gram Sabha instruments, as confirmed by local counsel.

KASHI LAKE CITY

REVIEW VISUAL ANNEX

Roads / intersections / phase-wise bird's-eye views / internal lake access
Gudiya, Varanasi - V4 220 kV integrated concept

30 rendered road views

20 phase and estate aerial views

10 internal lake-access views


40 diagrammatic plan / section / junction plates

INTERNAL LAKE ONLY - NO EXTERNAL WATER

ROAD 01 P1 BOULEVARD DAWN



ROAD 02 P1 COLLECTOR T JUNCTION

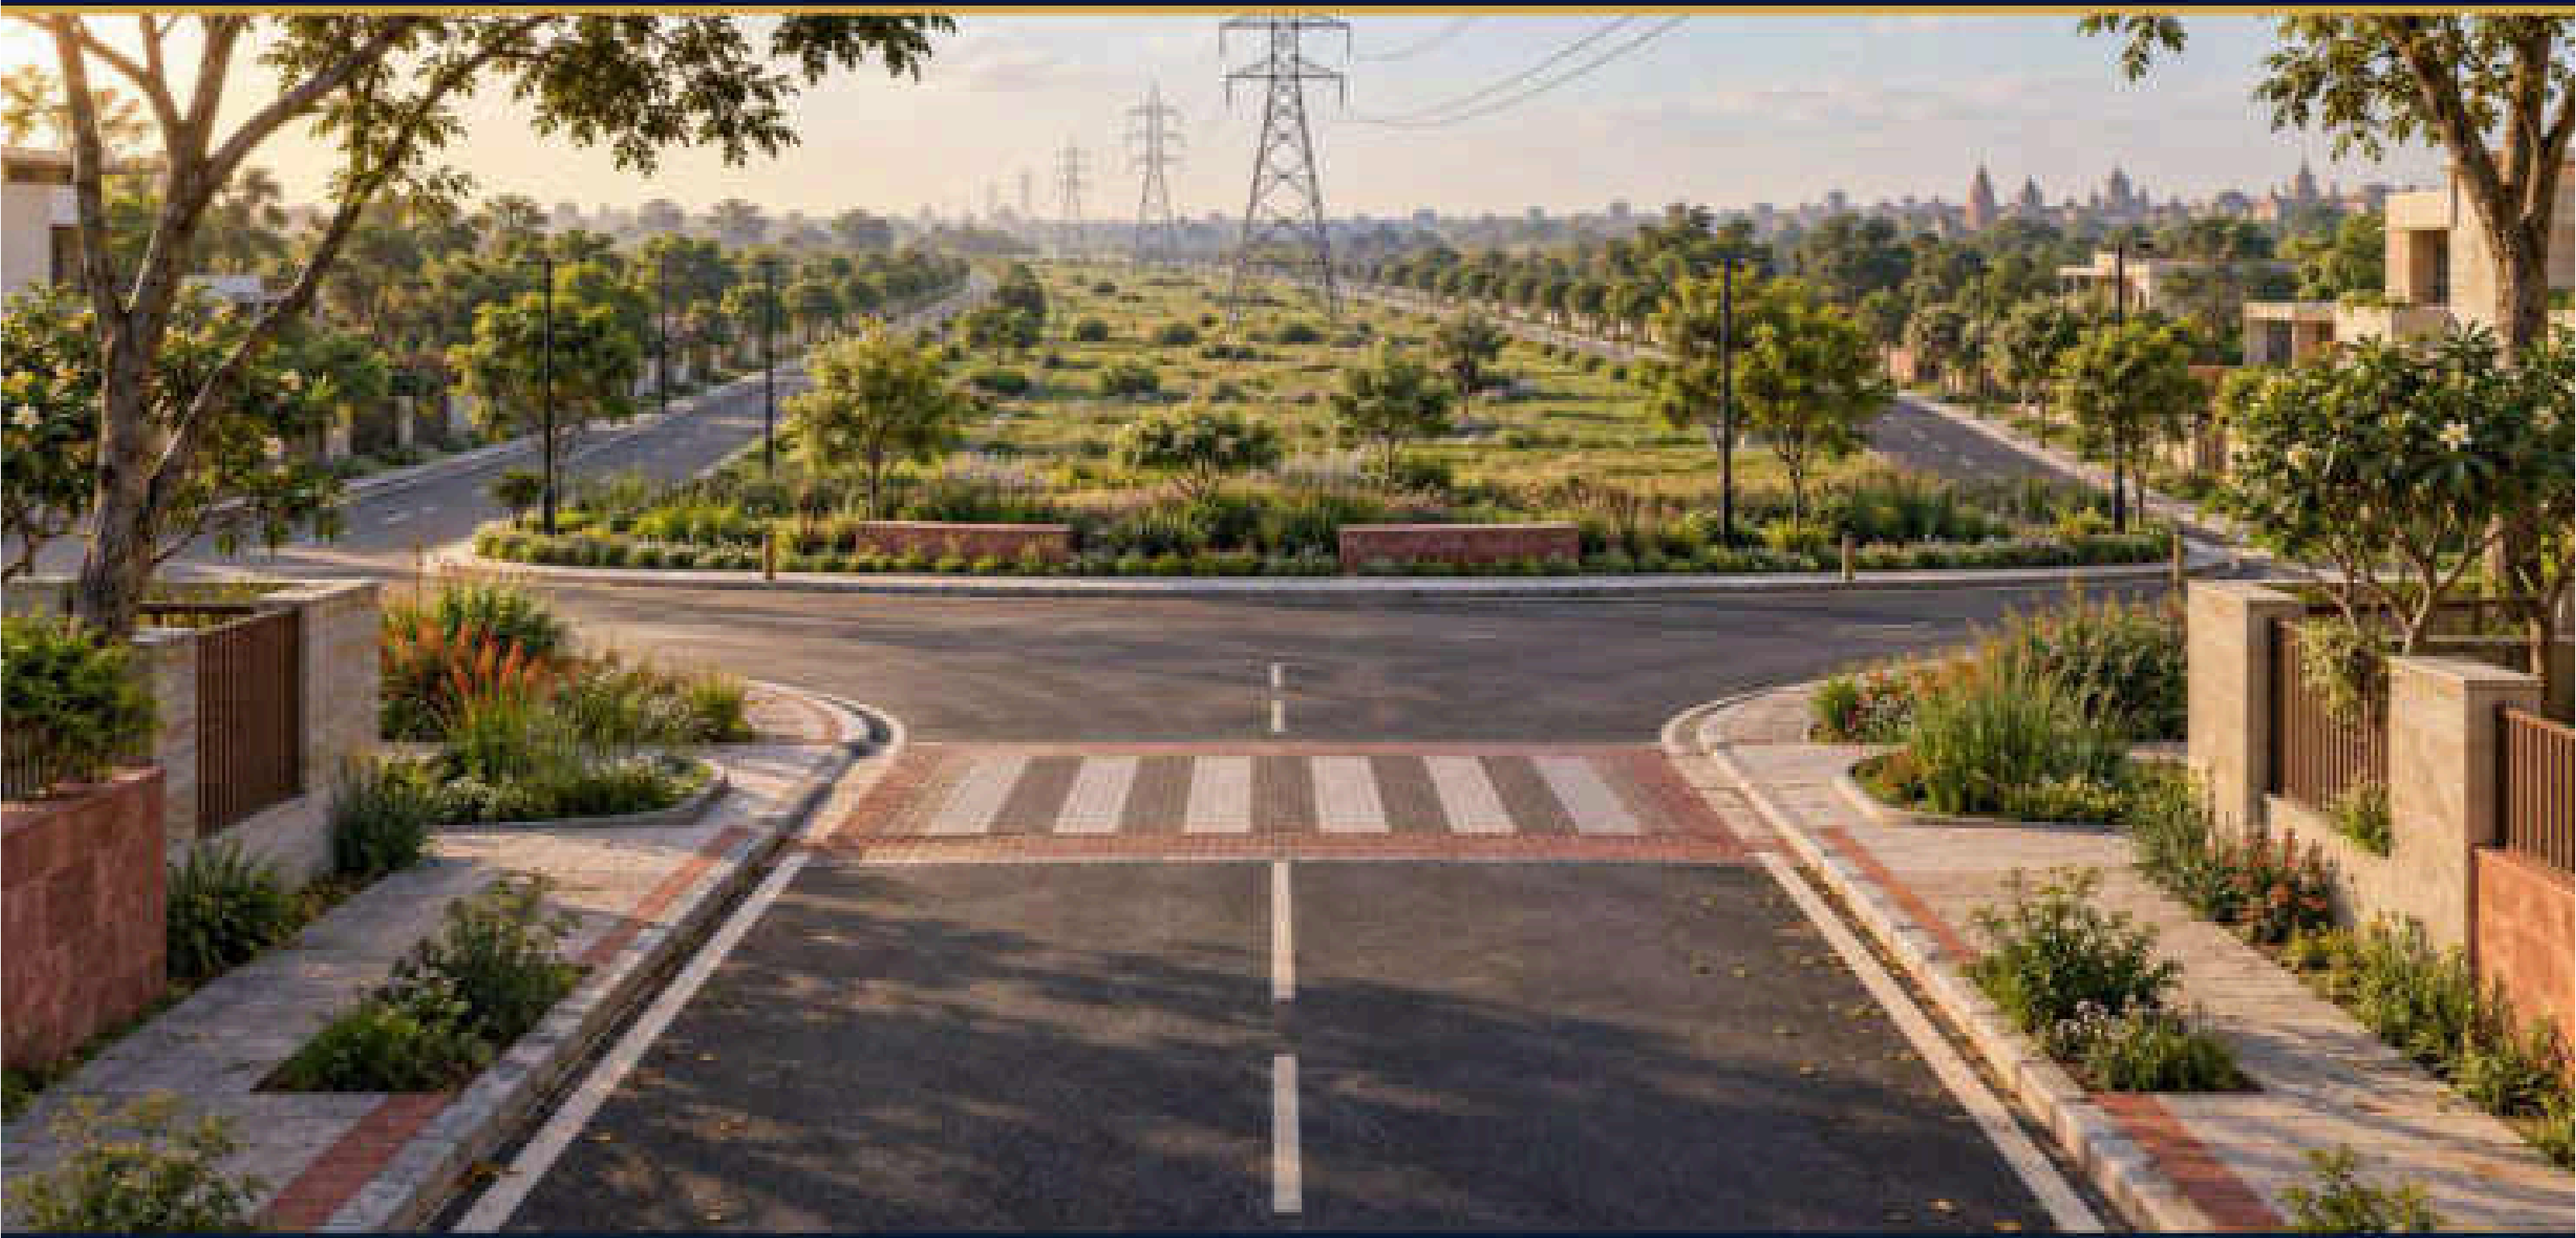

ROAD 03 P1 LOCAL STREET PLOT EDGE




Concept visualisation. Subject to change. All rights reserved.


ROAD 04 P2 HT FLANK ROAD



ROAD 05 P2 HT CROSSING

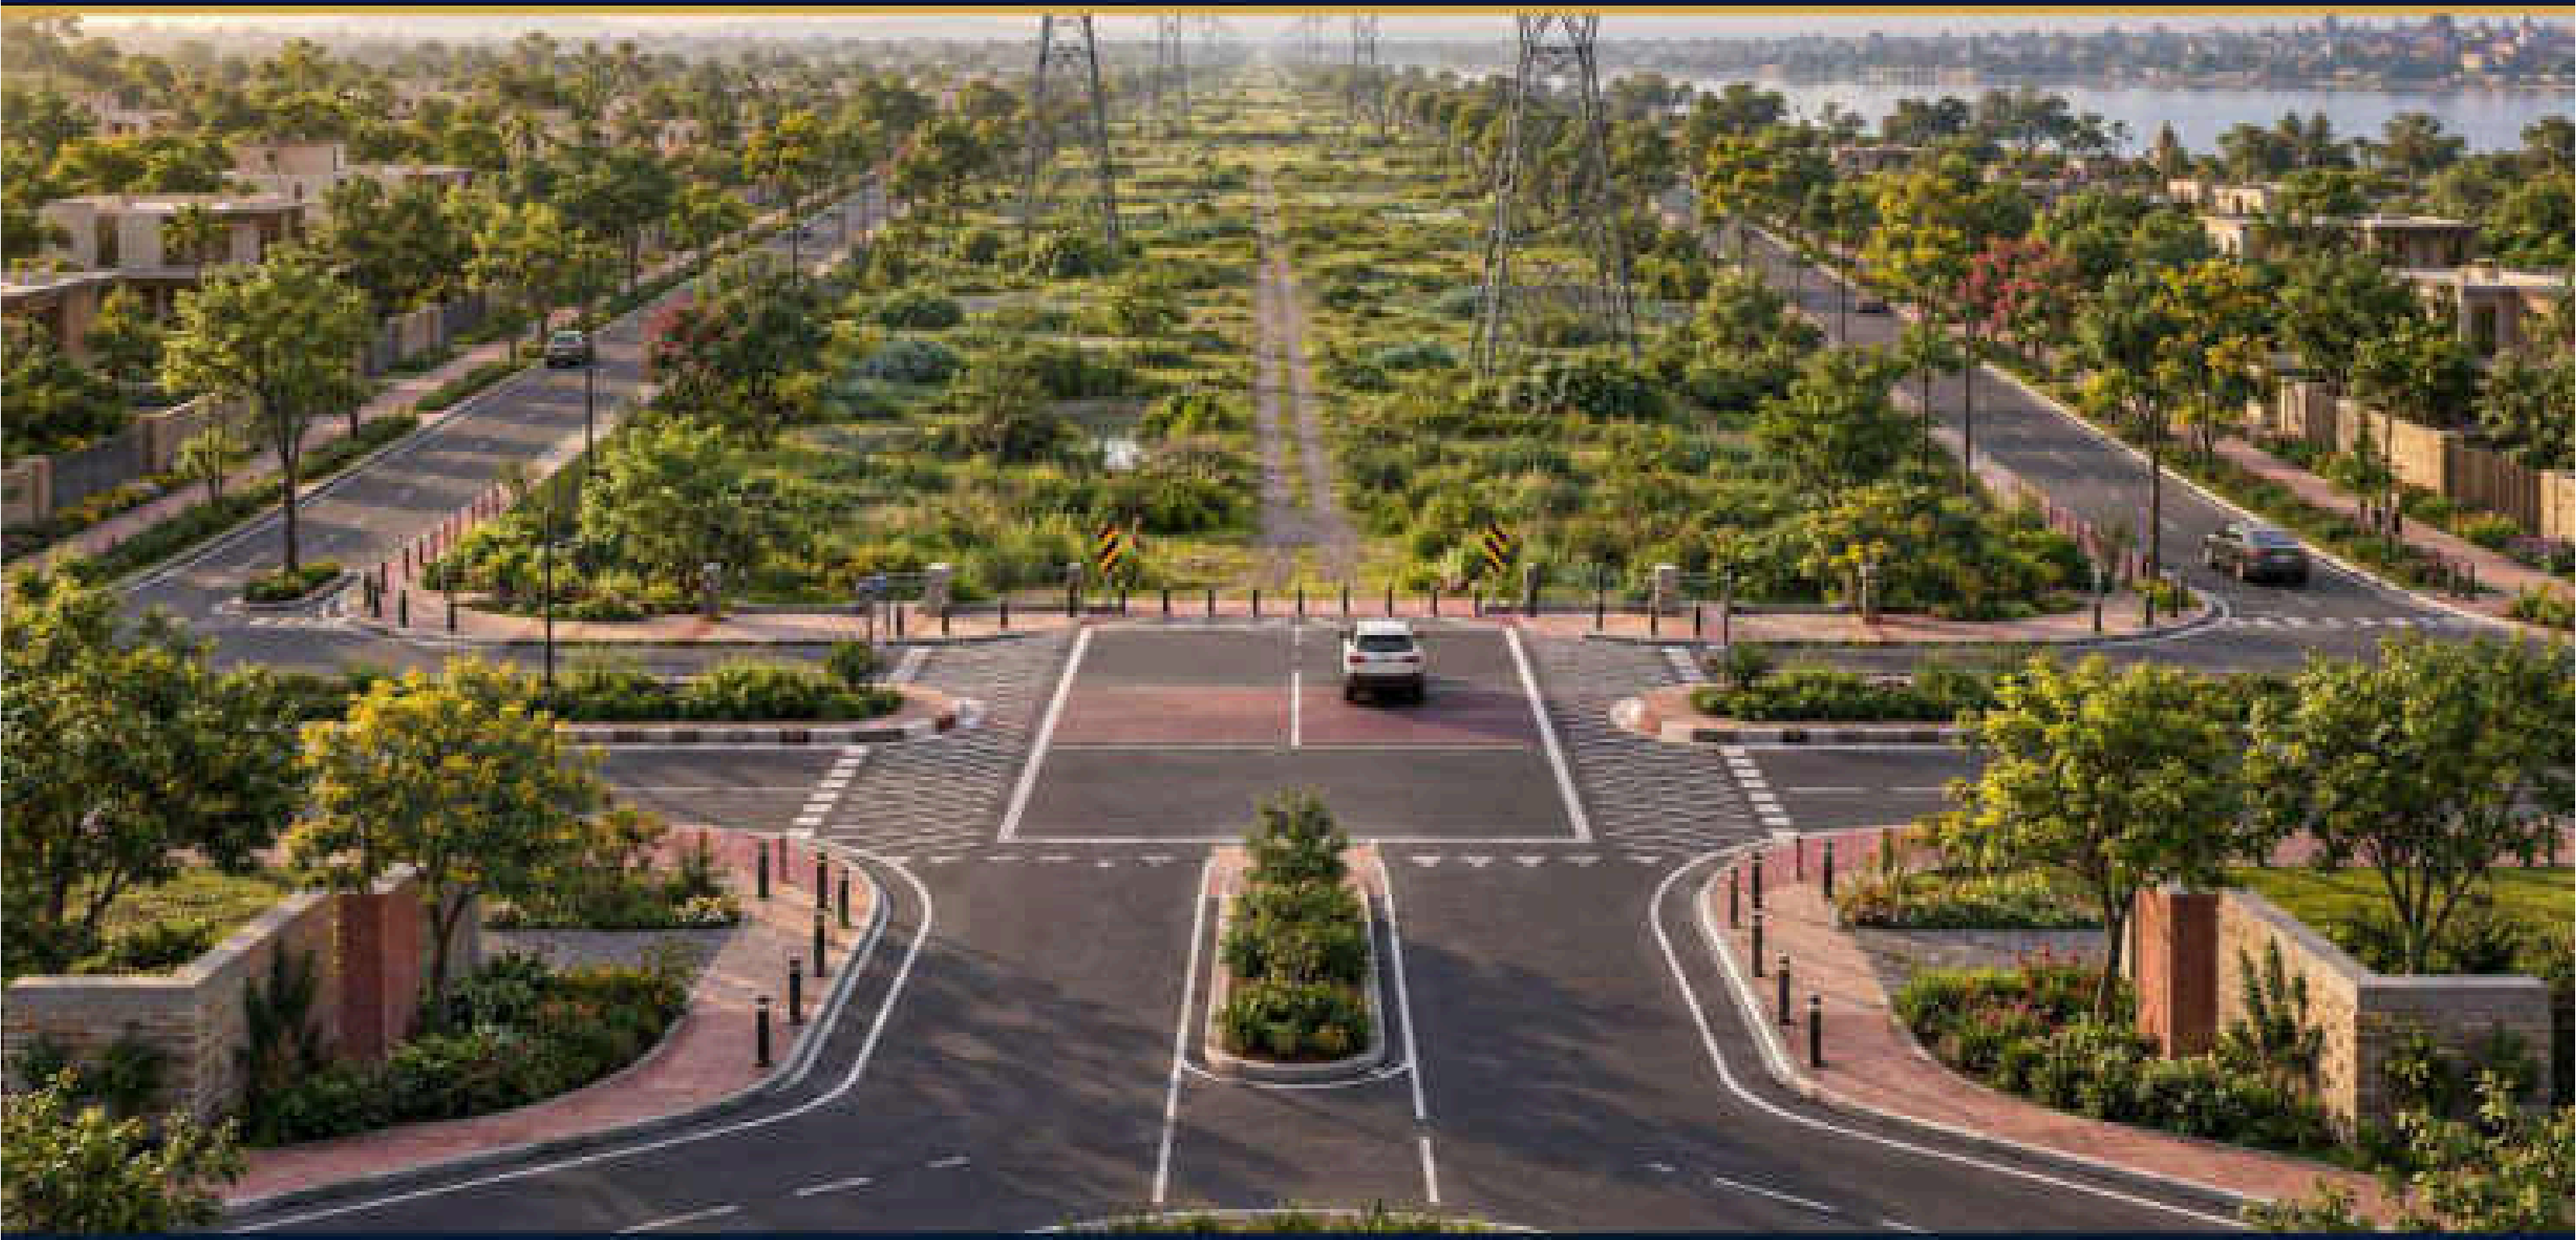


ROAD 06 P2 ROUNDABOUT

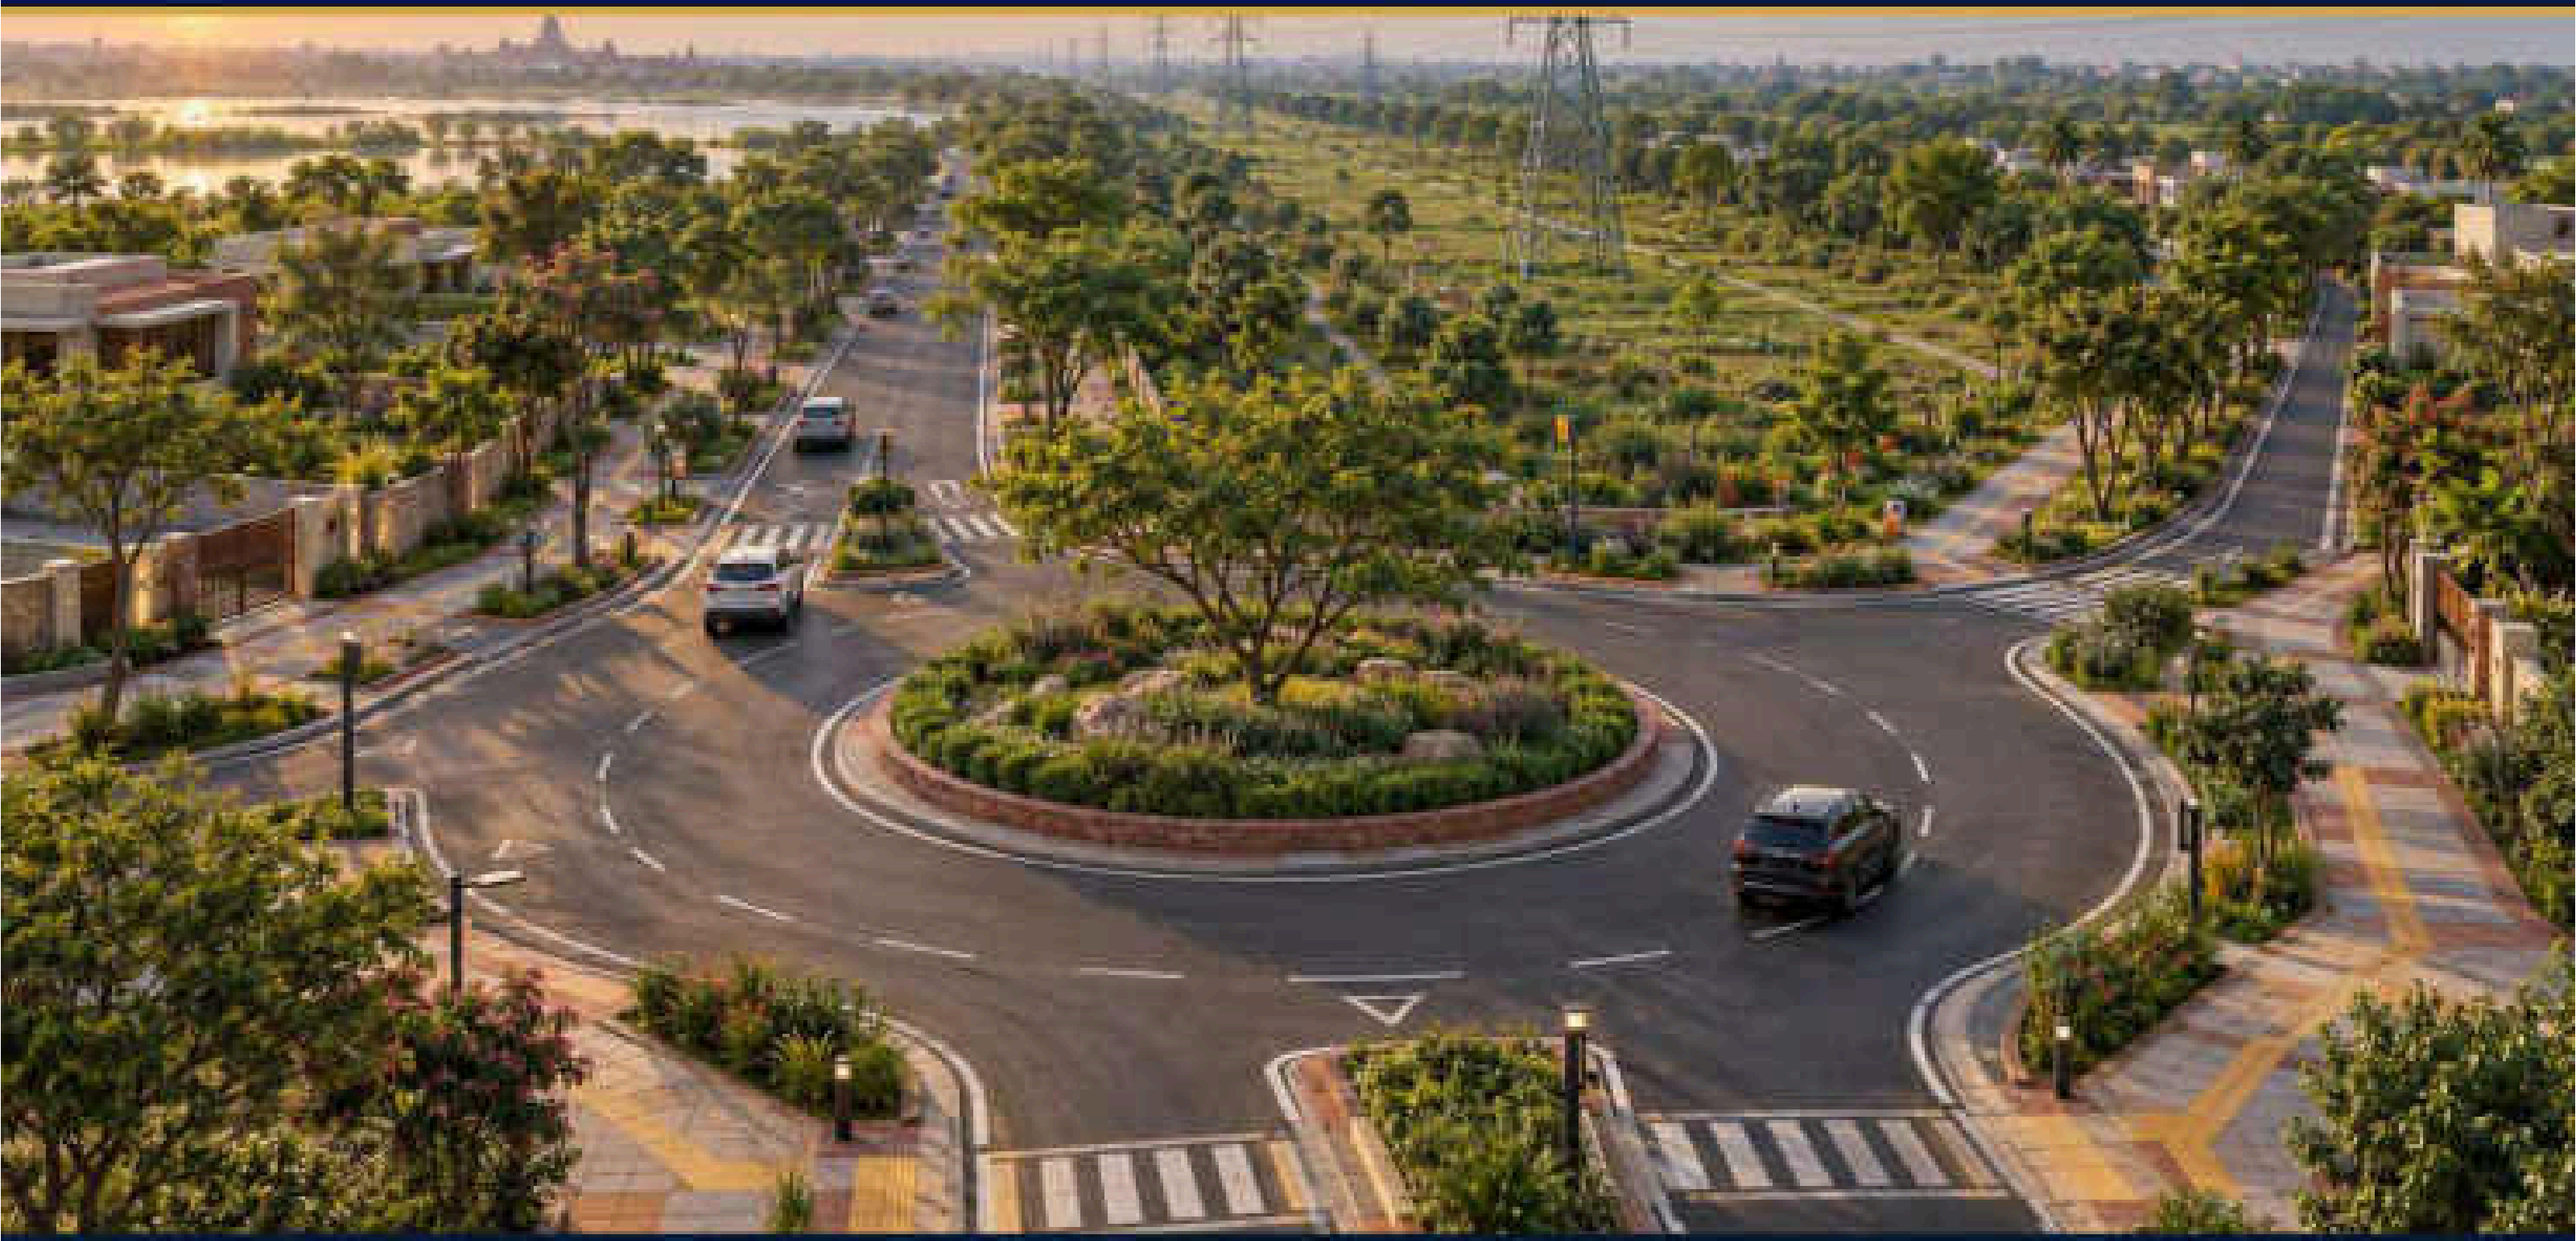

ROAD 07 P3 ENGINEERED CROSSING NODE



ROAD 08 P3 SERVICE LOOP

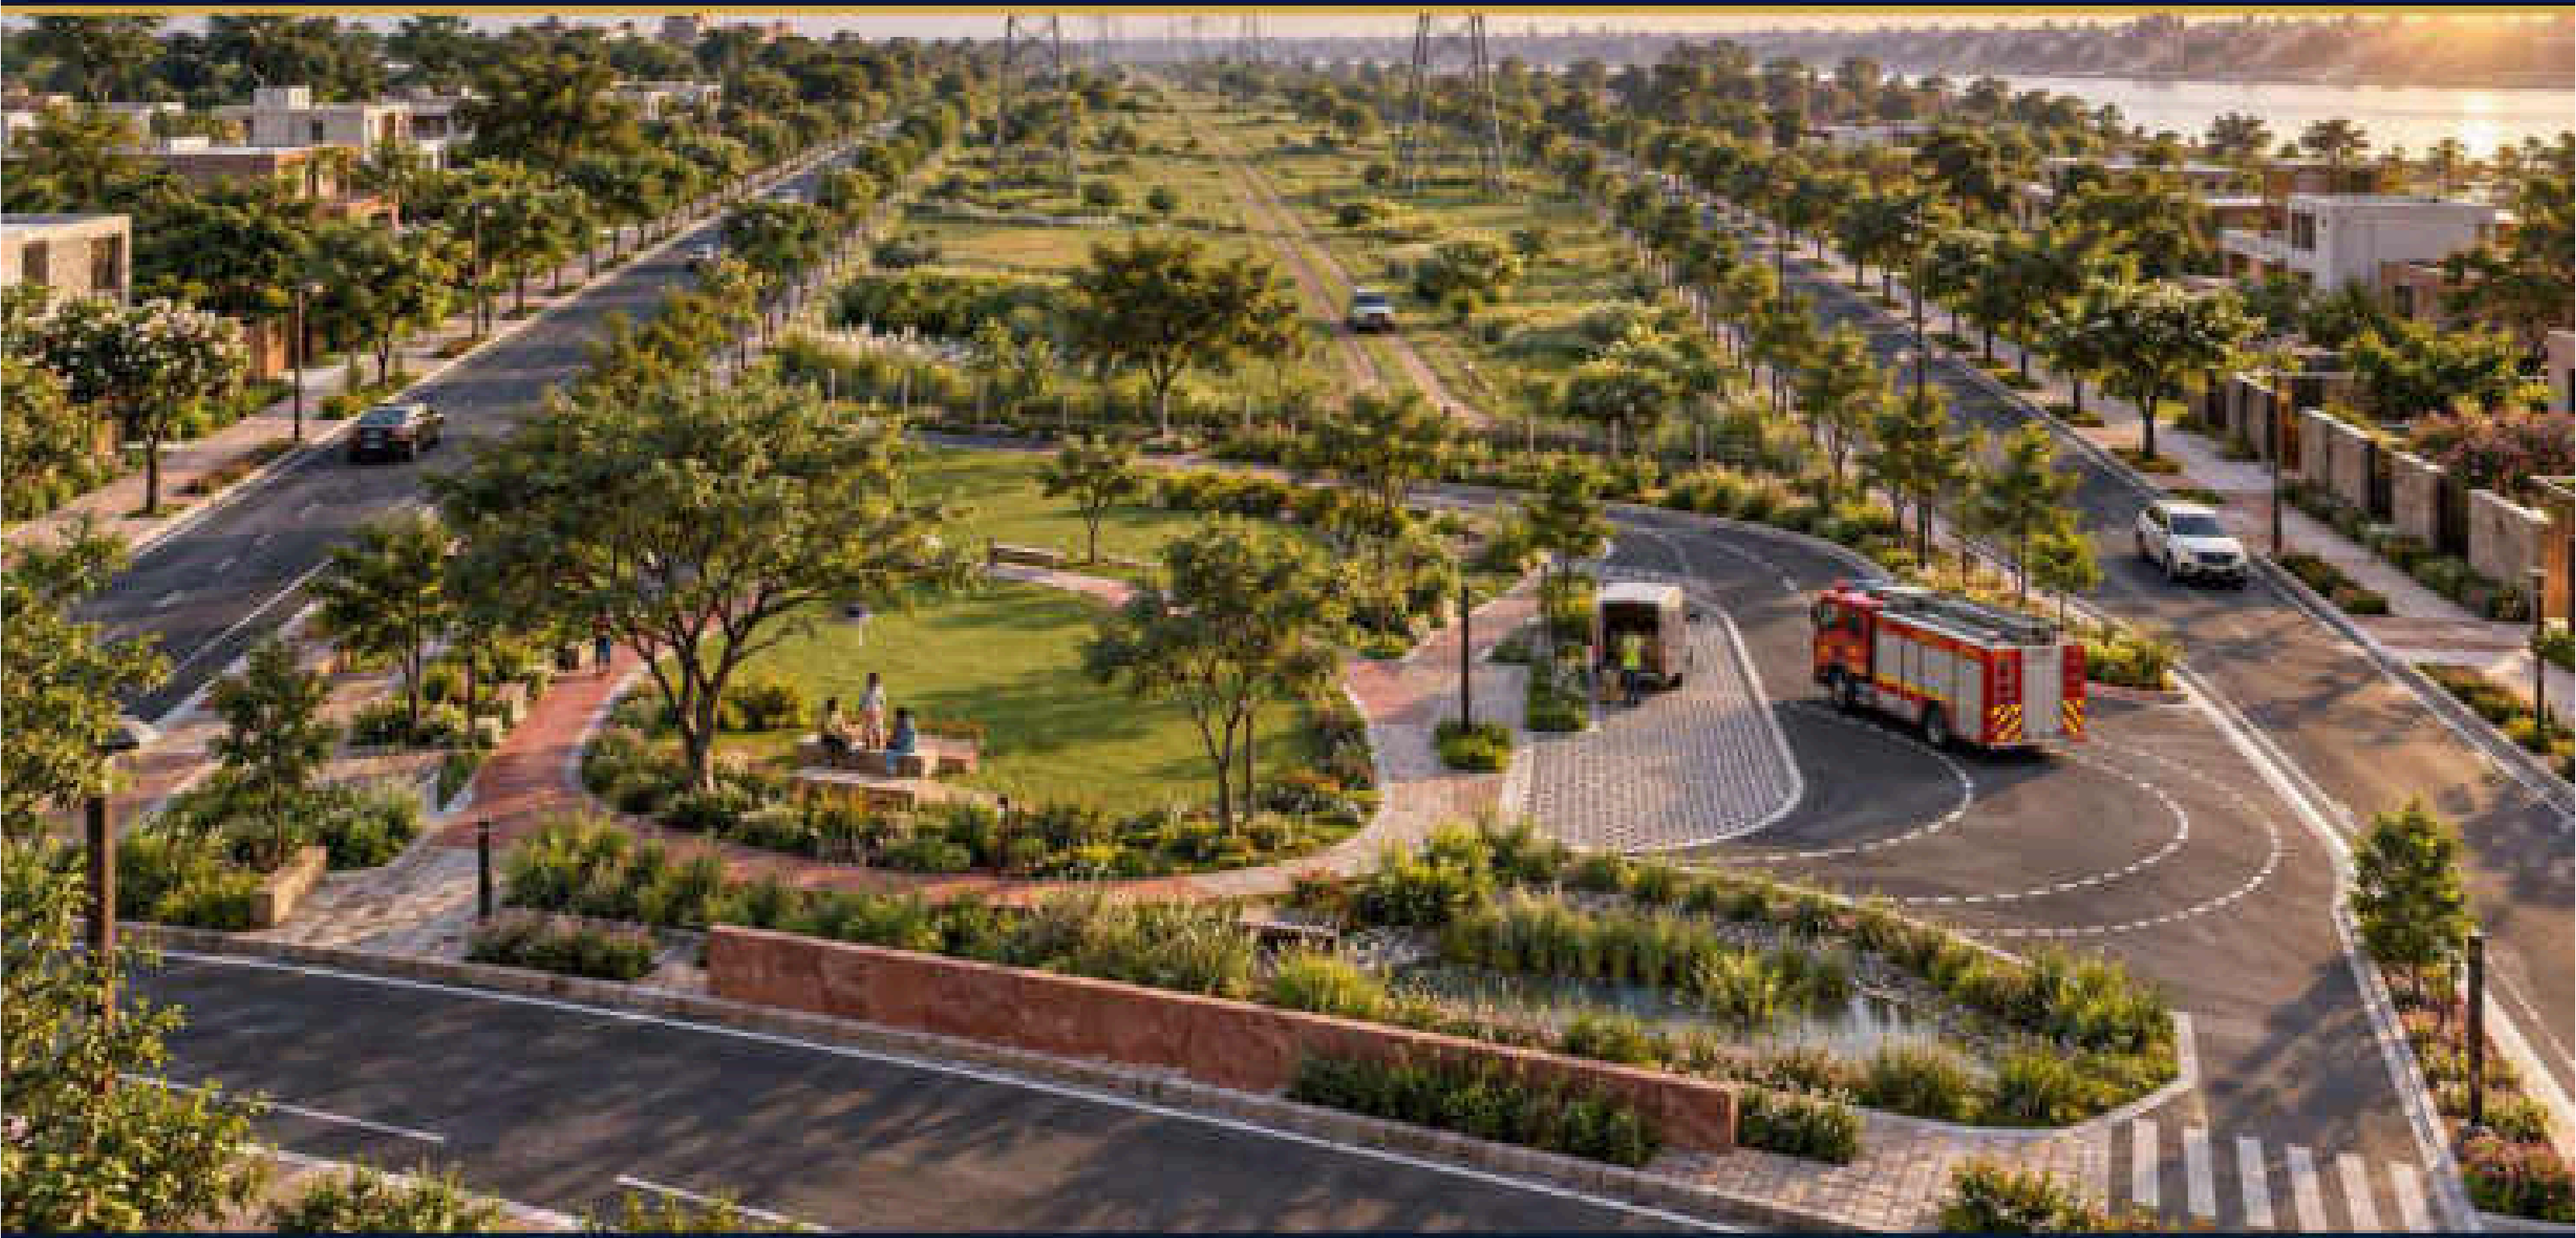

ROAD 09 P4 QUIET COLLECTOR SPORTS EDGE




ROAD 10 P5 AQUATIC APPROACH




ROAD 11 P1 MAIN GATE DROPOFF



ROAD 12 P1 FOUR WAY INTERSECTION

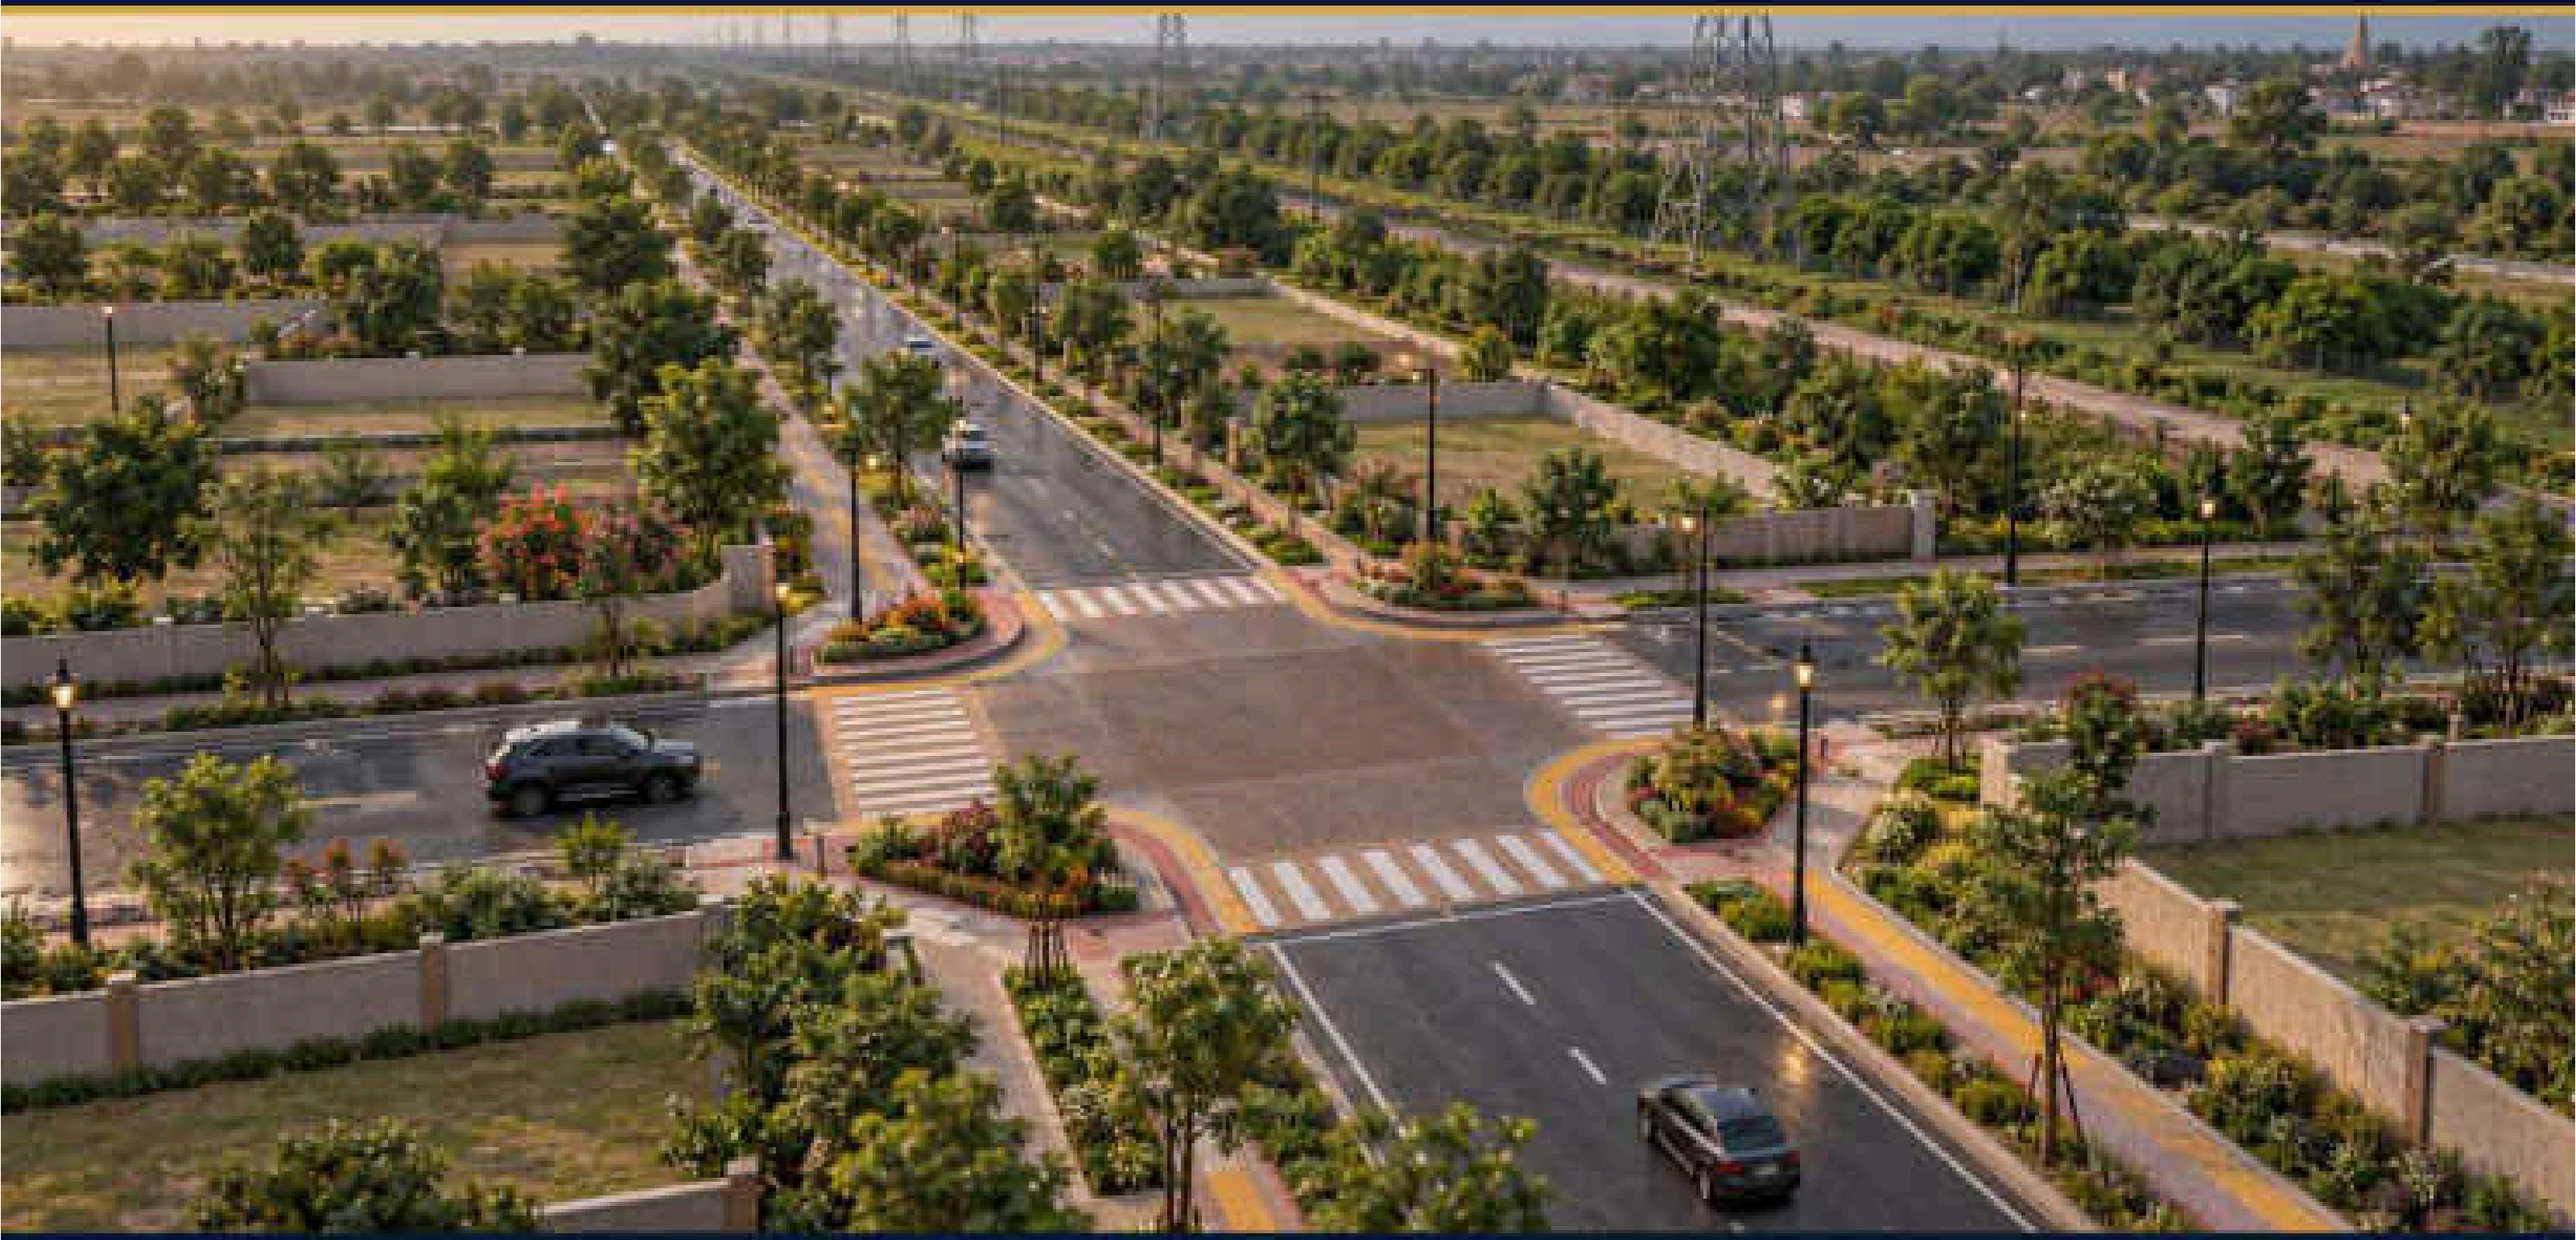


ROAD 13 P1 TRAFFIC CALMED LANE

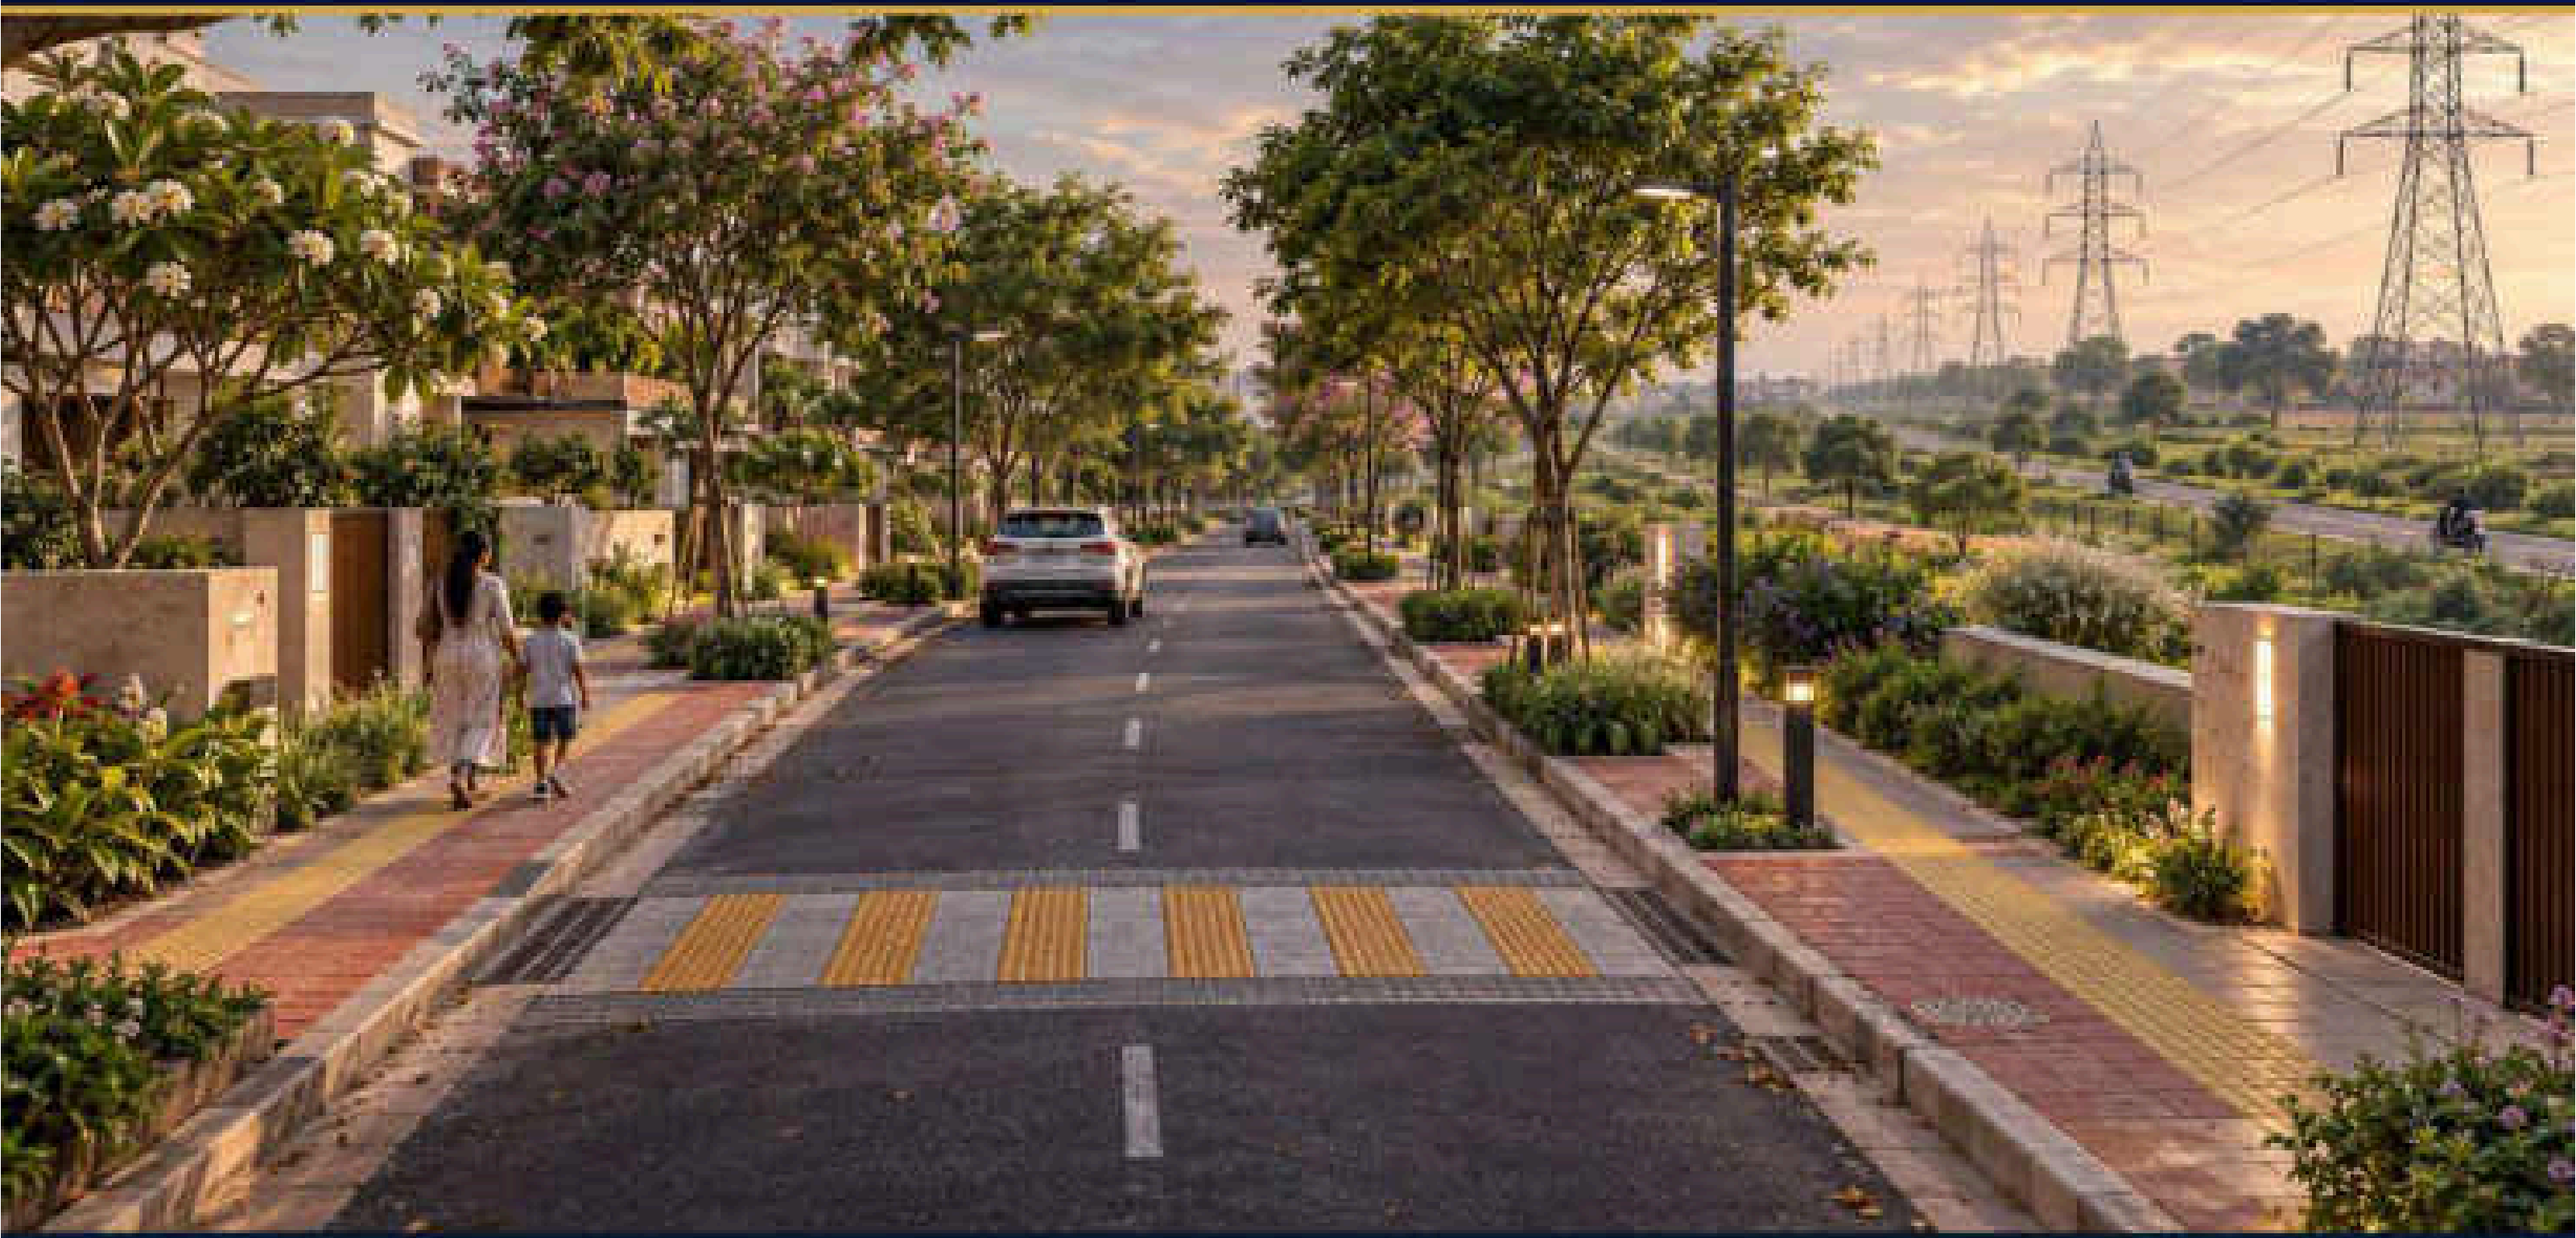

ROAD 14 P1 CORNER PLOT VIEW

ROAD / INTERSECTION | PLATE 014

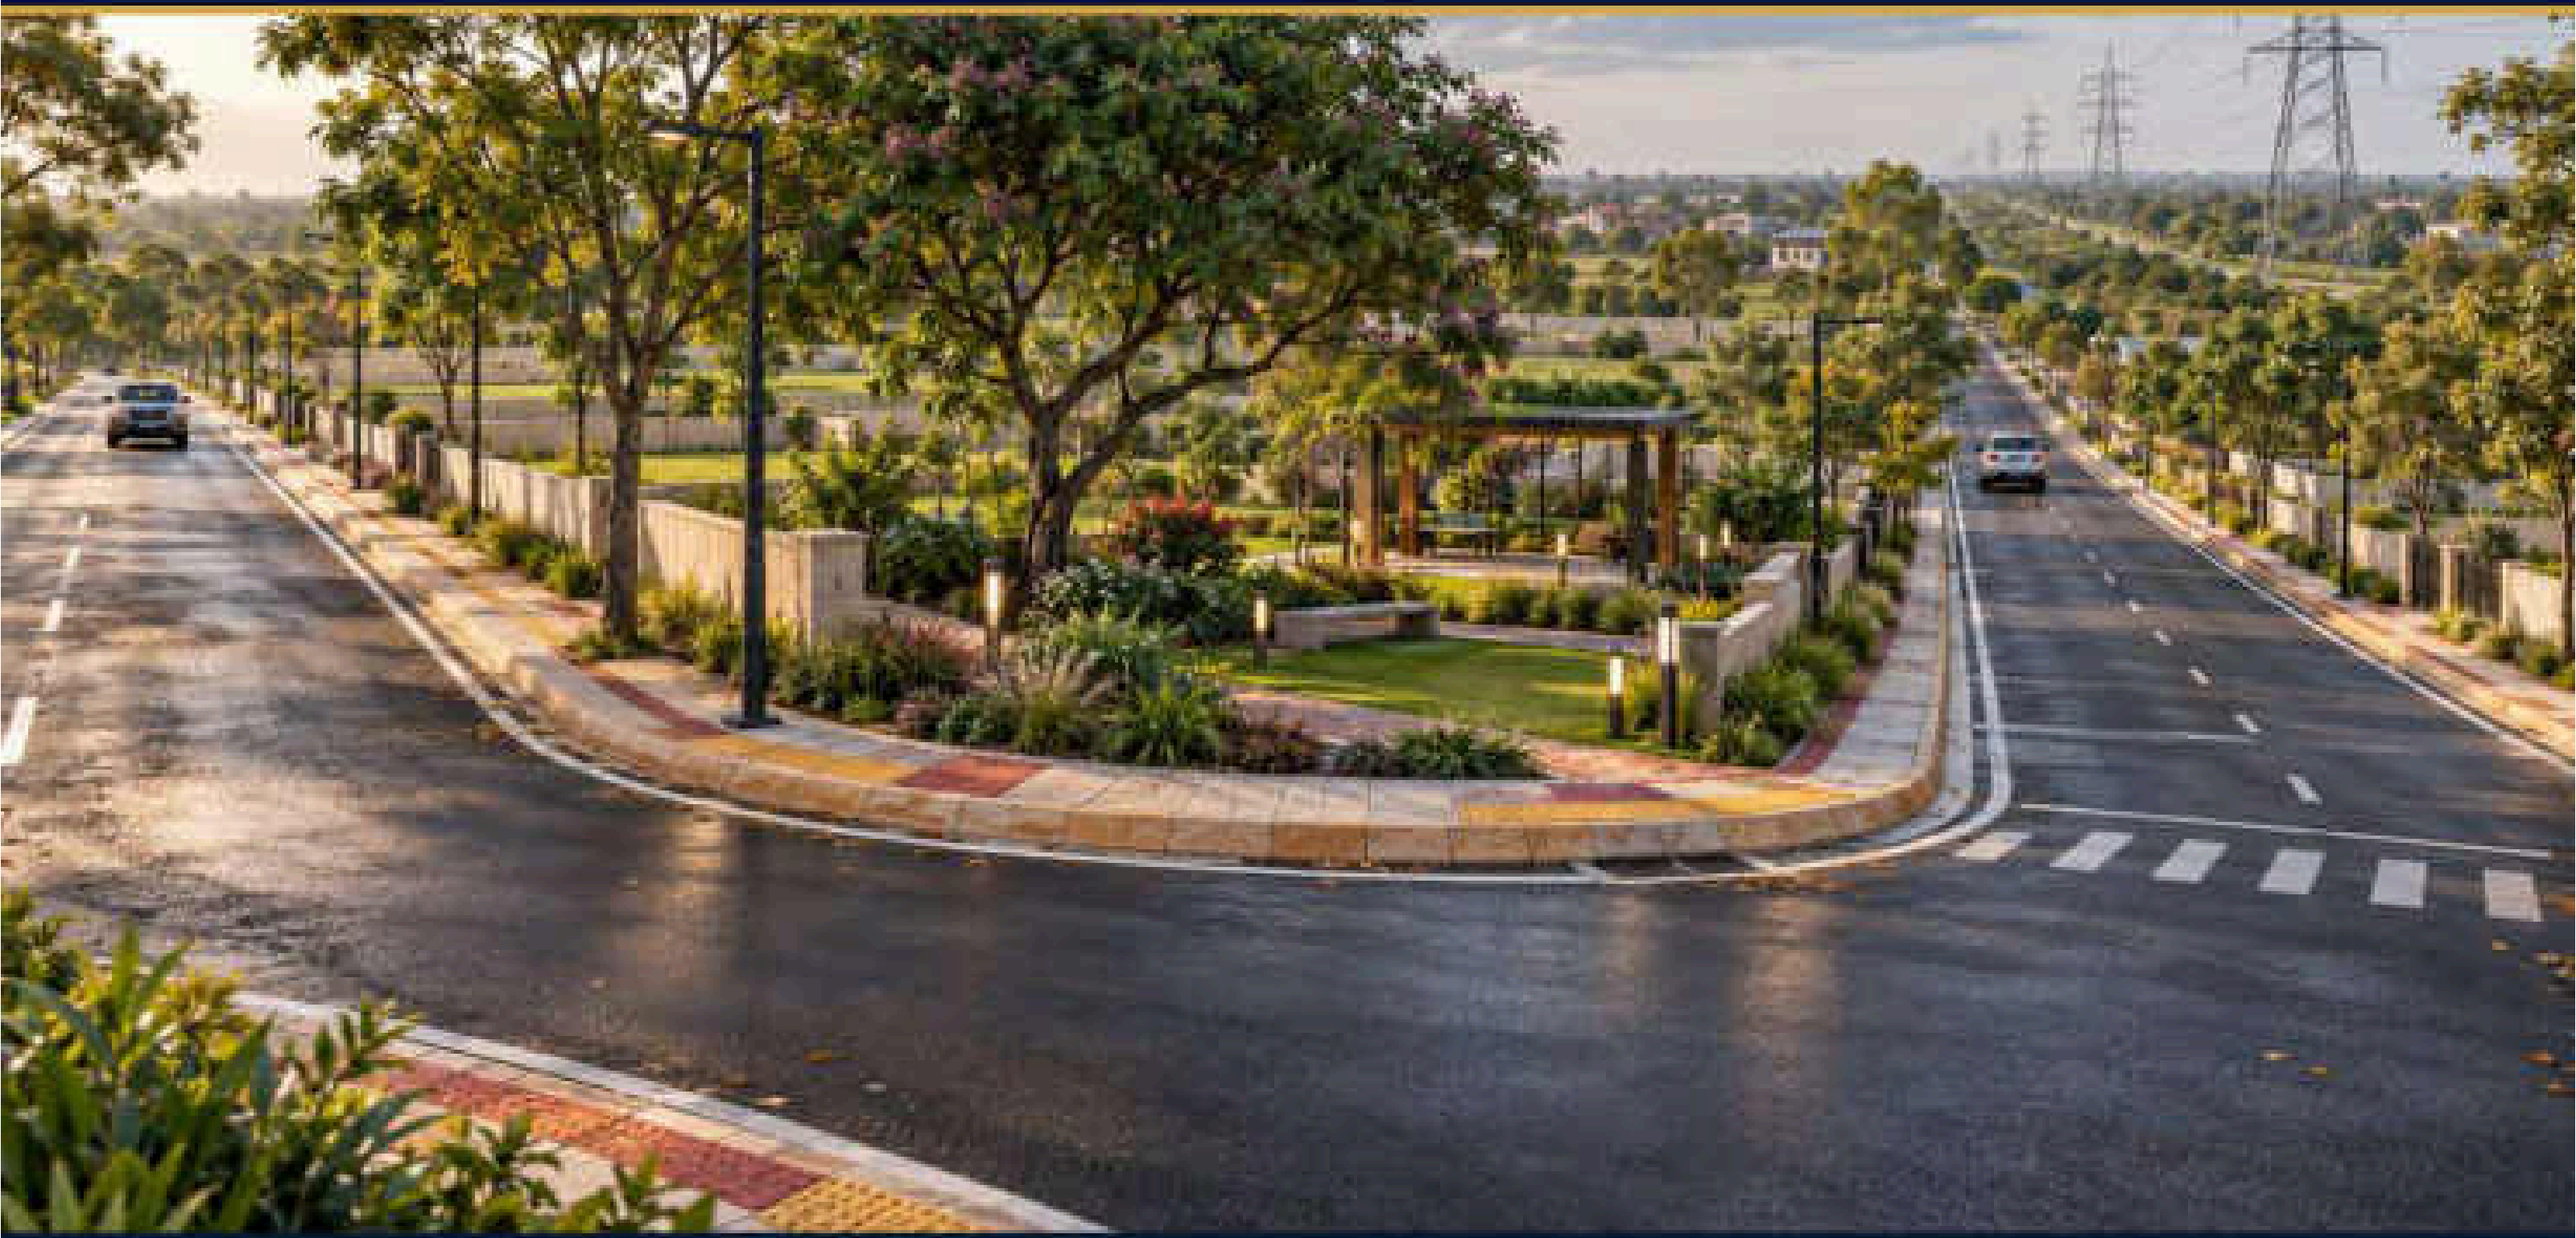

ROAD 15 P1 CYCLE PEDESTRIAN CROSSING



ROAD 16 P2 FLANK ROAD NORTH



ROAD 17 P2 FLANK ROAD SOUTH



ROAD 18 P2 JUNCTION CONTROL



ROAD 19 P2 EMERGENCY ACCESS



ROAD 20 P2 ROADSIDE BIOSWALE



ROAD 21 P2 GREEN SPINE ENTRY

ROAD / INTERSECTION | PLATE 025



ROAD 22 P2 COLLECTOR CURVE



ROAD 23 P2 SERVICE TURNING



ROAD 24 P3 CROSSING APPROACH




ROAD 25 P3 JUNCTION ISLAND



ROAD 26 P3 PEDESTRIAN SPINE



ROAD 27 P4 PARK LOOP

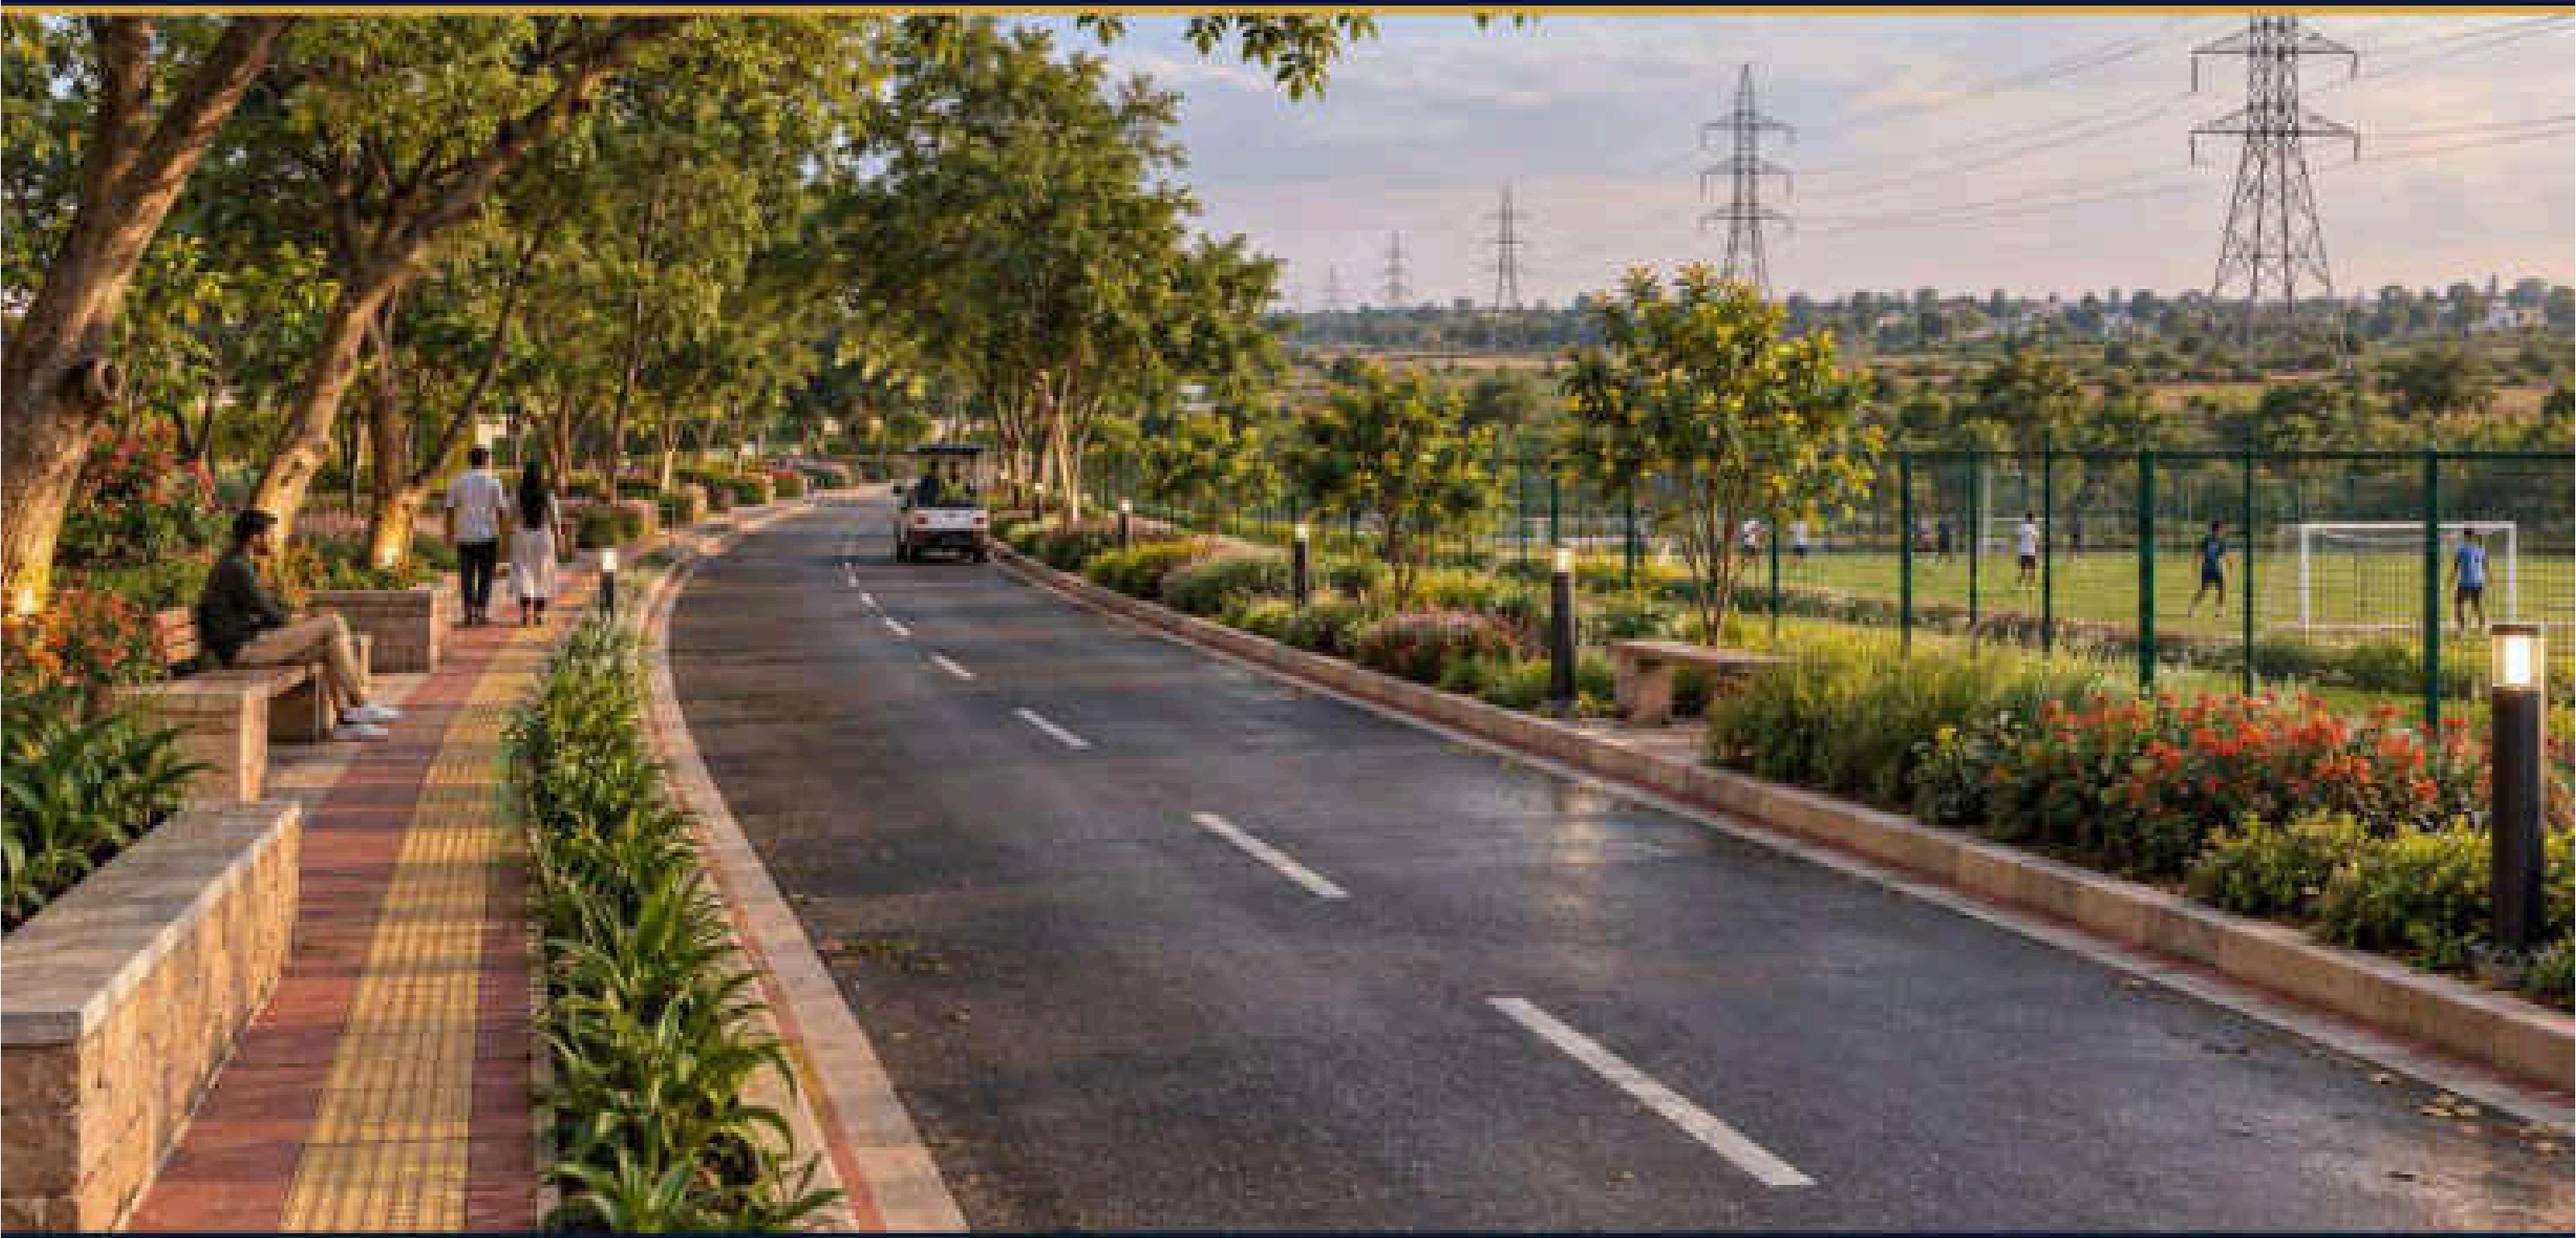


ROAD 28 P4 ROUNDABOUT EDGE



ROAD 29 P4 PLOT STREET DUSK

ROAD / INTERSECTION | PLATE 038

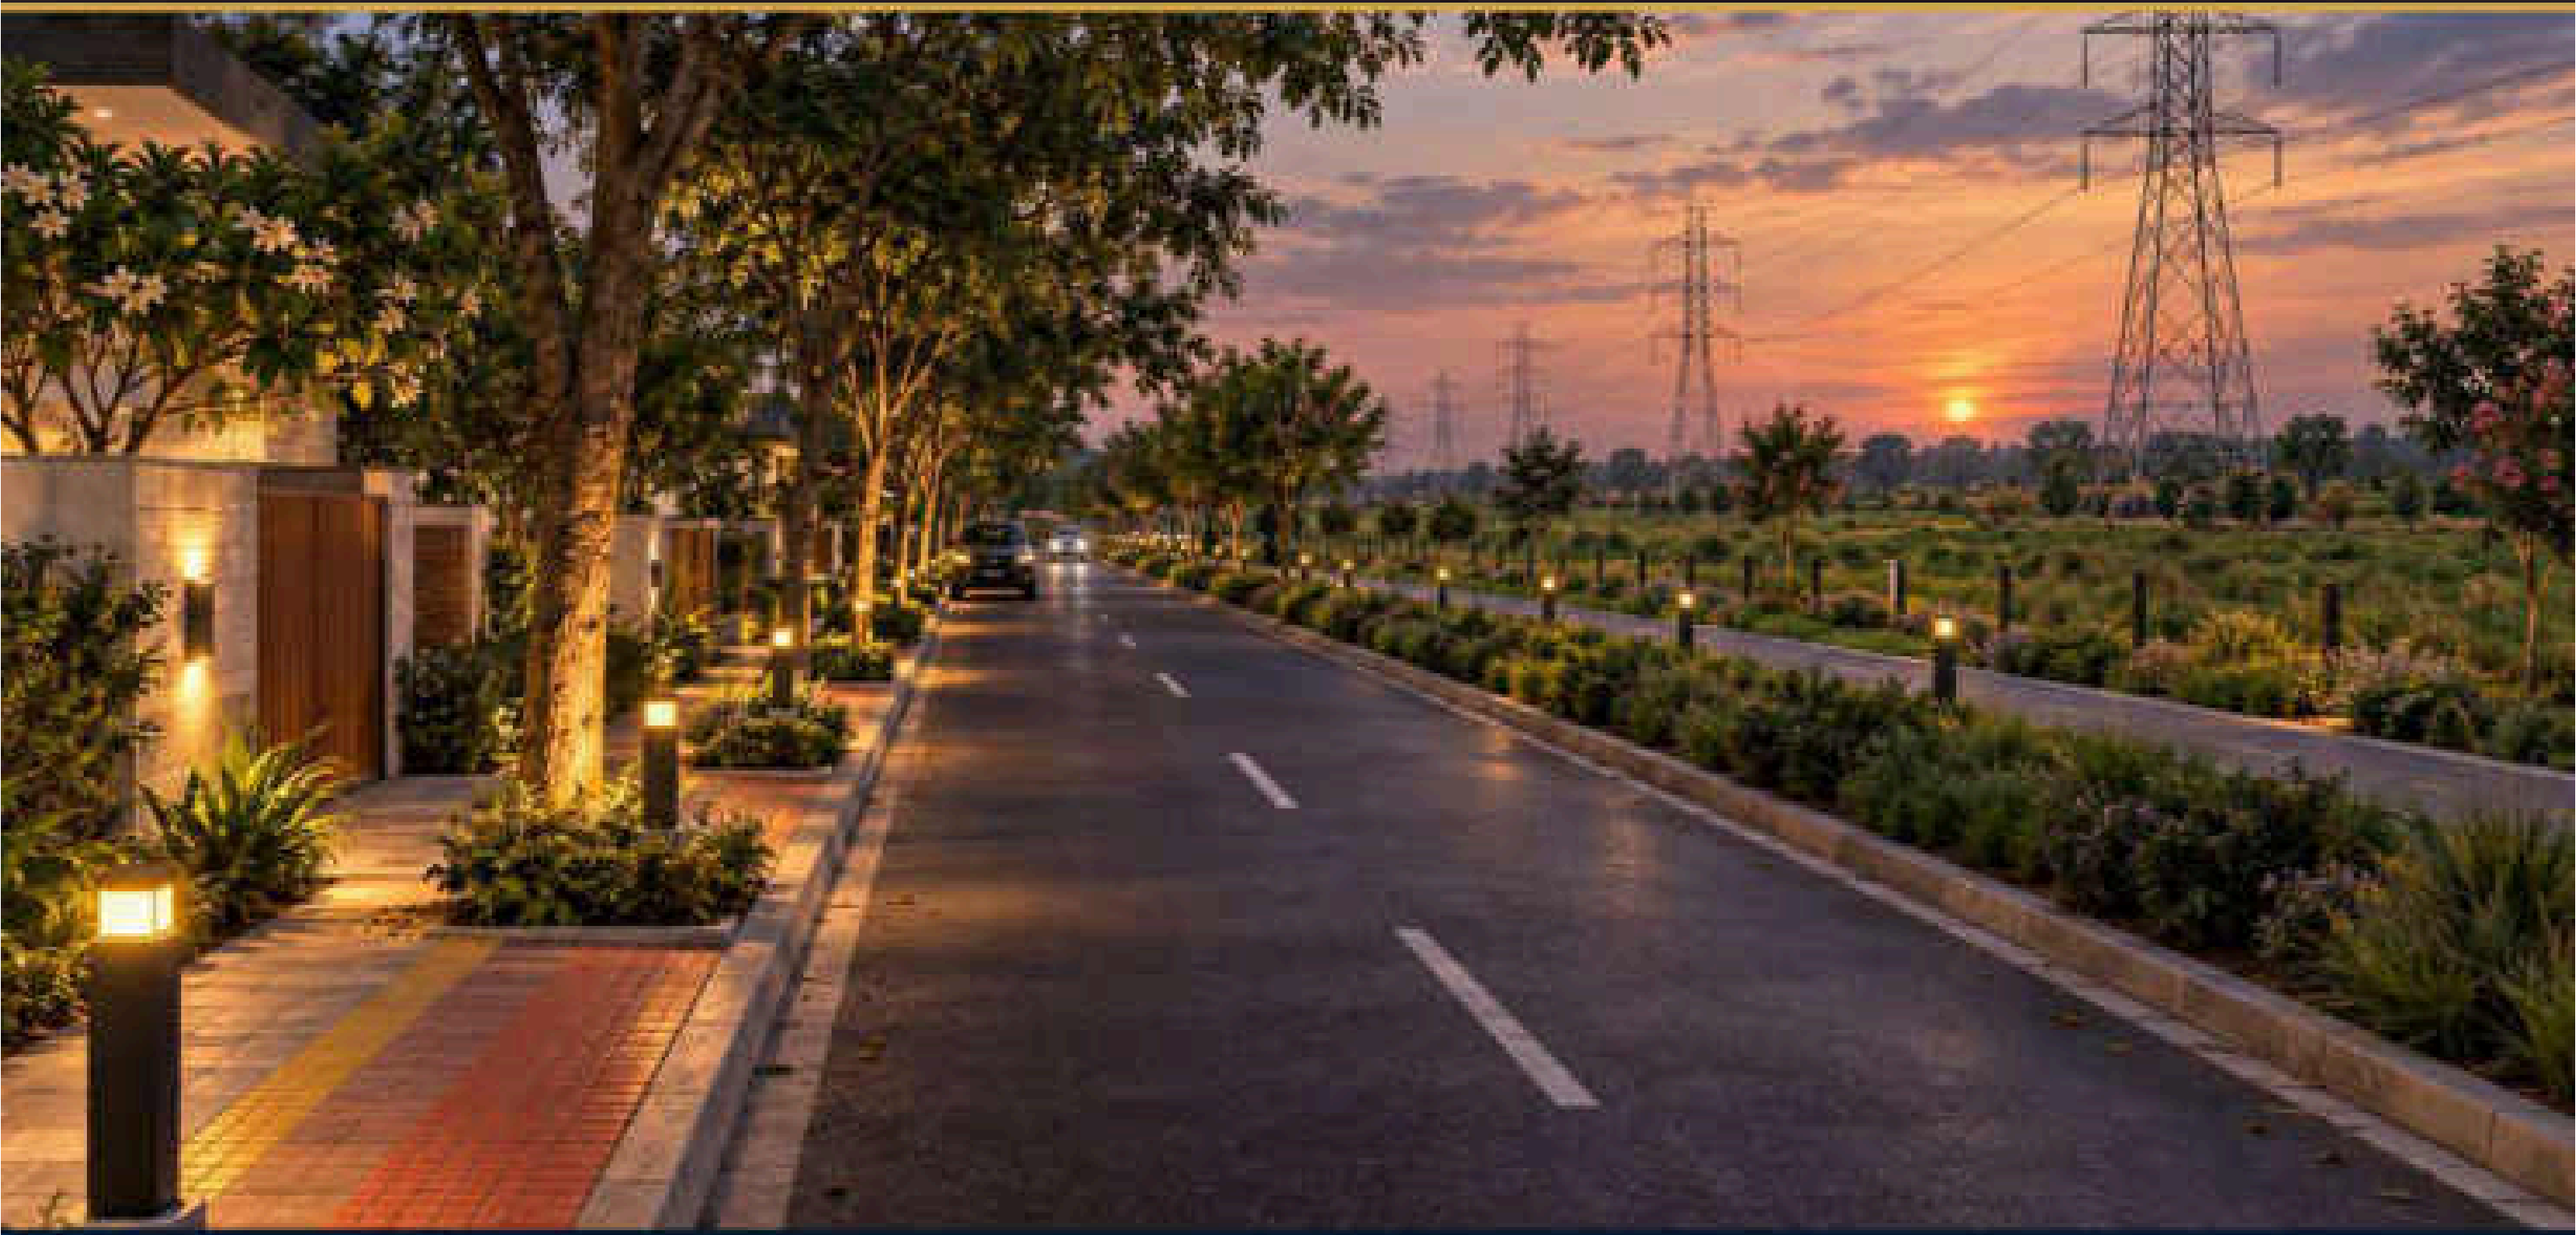

ROAD 30 P5 CLUBHOUSE DROPOFF



AERIAL 11 P1 ENTRY SIGHTLINE



AERIAL 12 P1 NEIGHBOURHOOD



AERIAL 13 P2 CORRIDOR




AERIAL 14 P2 JUNCTION



AERIAL 15 P3 CROSSING



AERIAL 16 P3 GREEN NETWORK

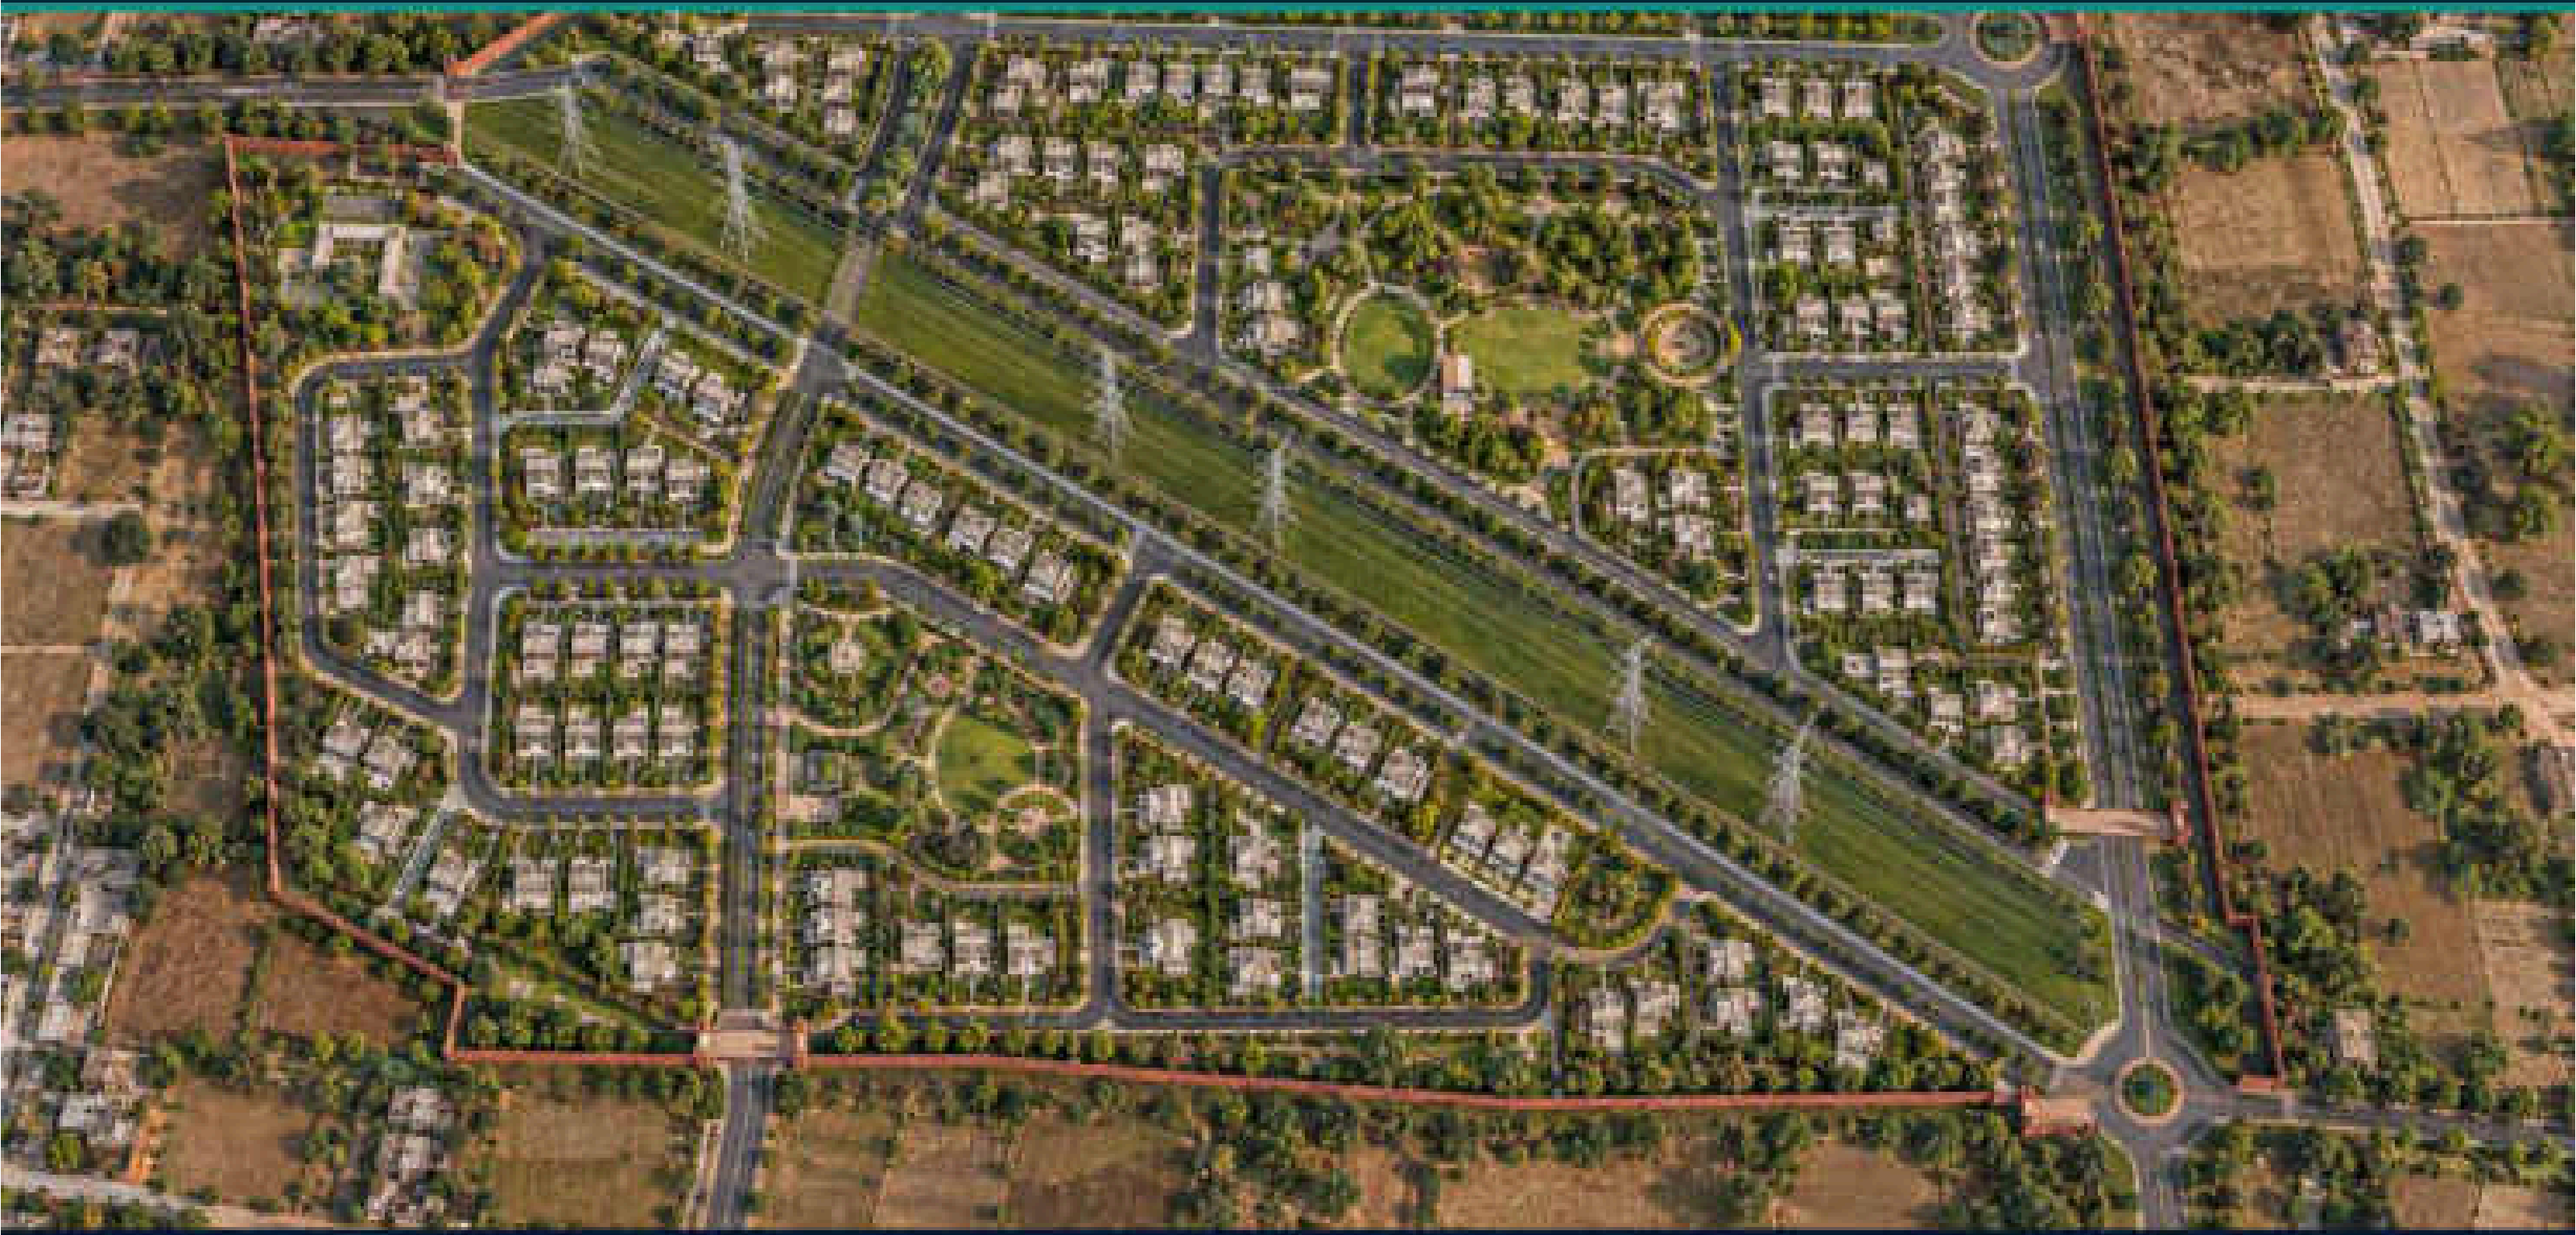

AERIAL 17 P4 QUIET SPORT




AERIAL 18 P4 NEIGHBOURHOOD



AERIAL 19 P5 AQUATIC CLUB



AERIAL 20 WHOLE ESTATE NIGHT

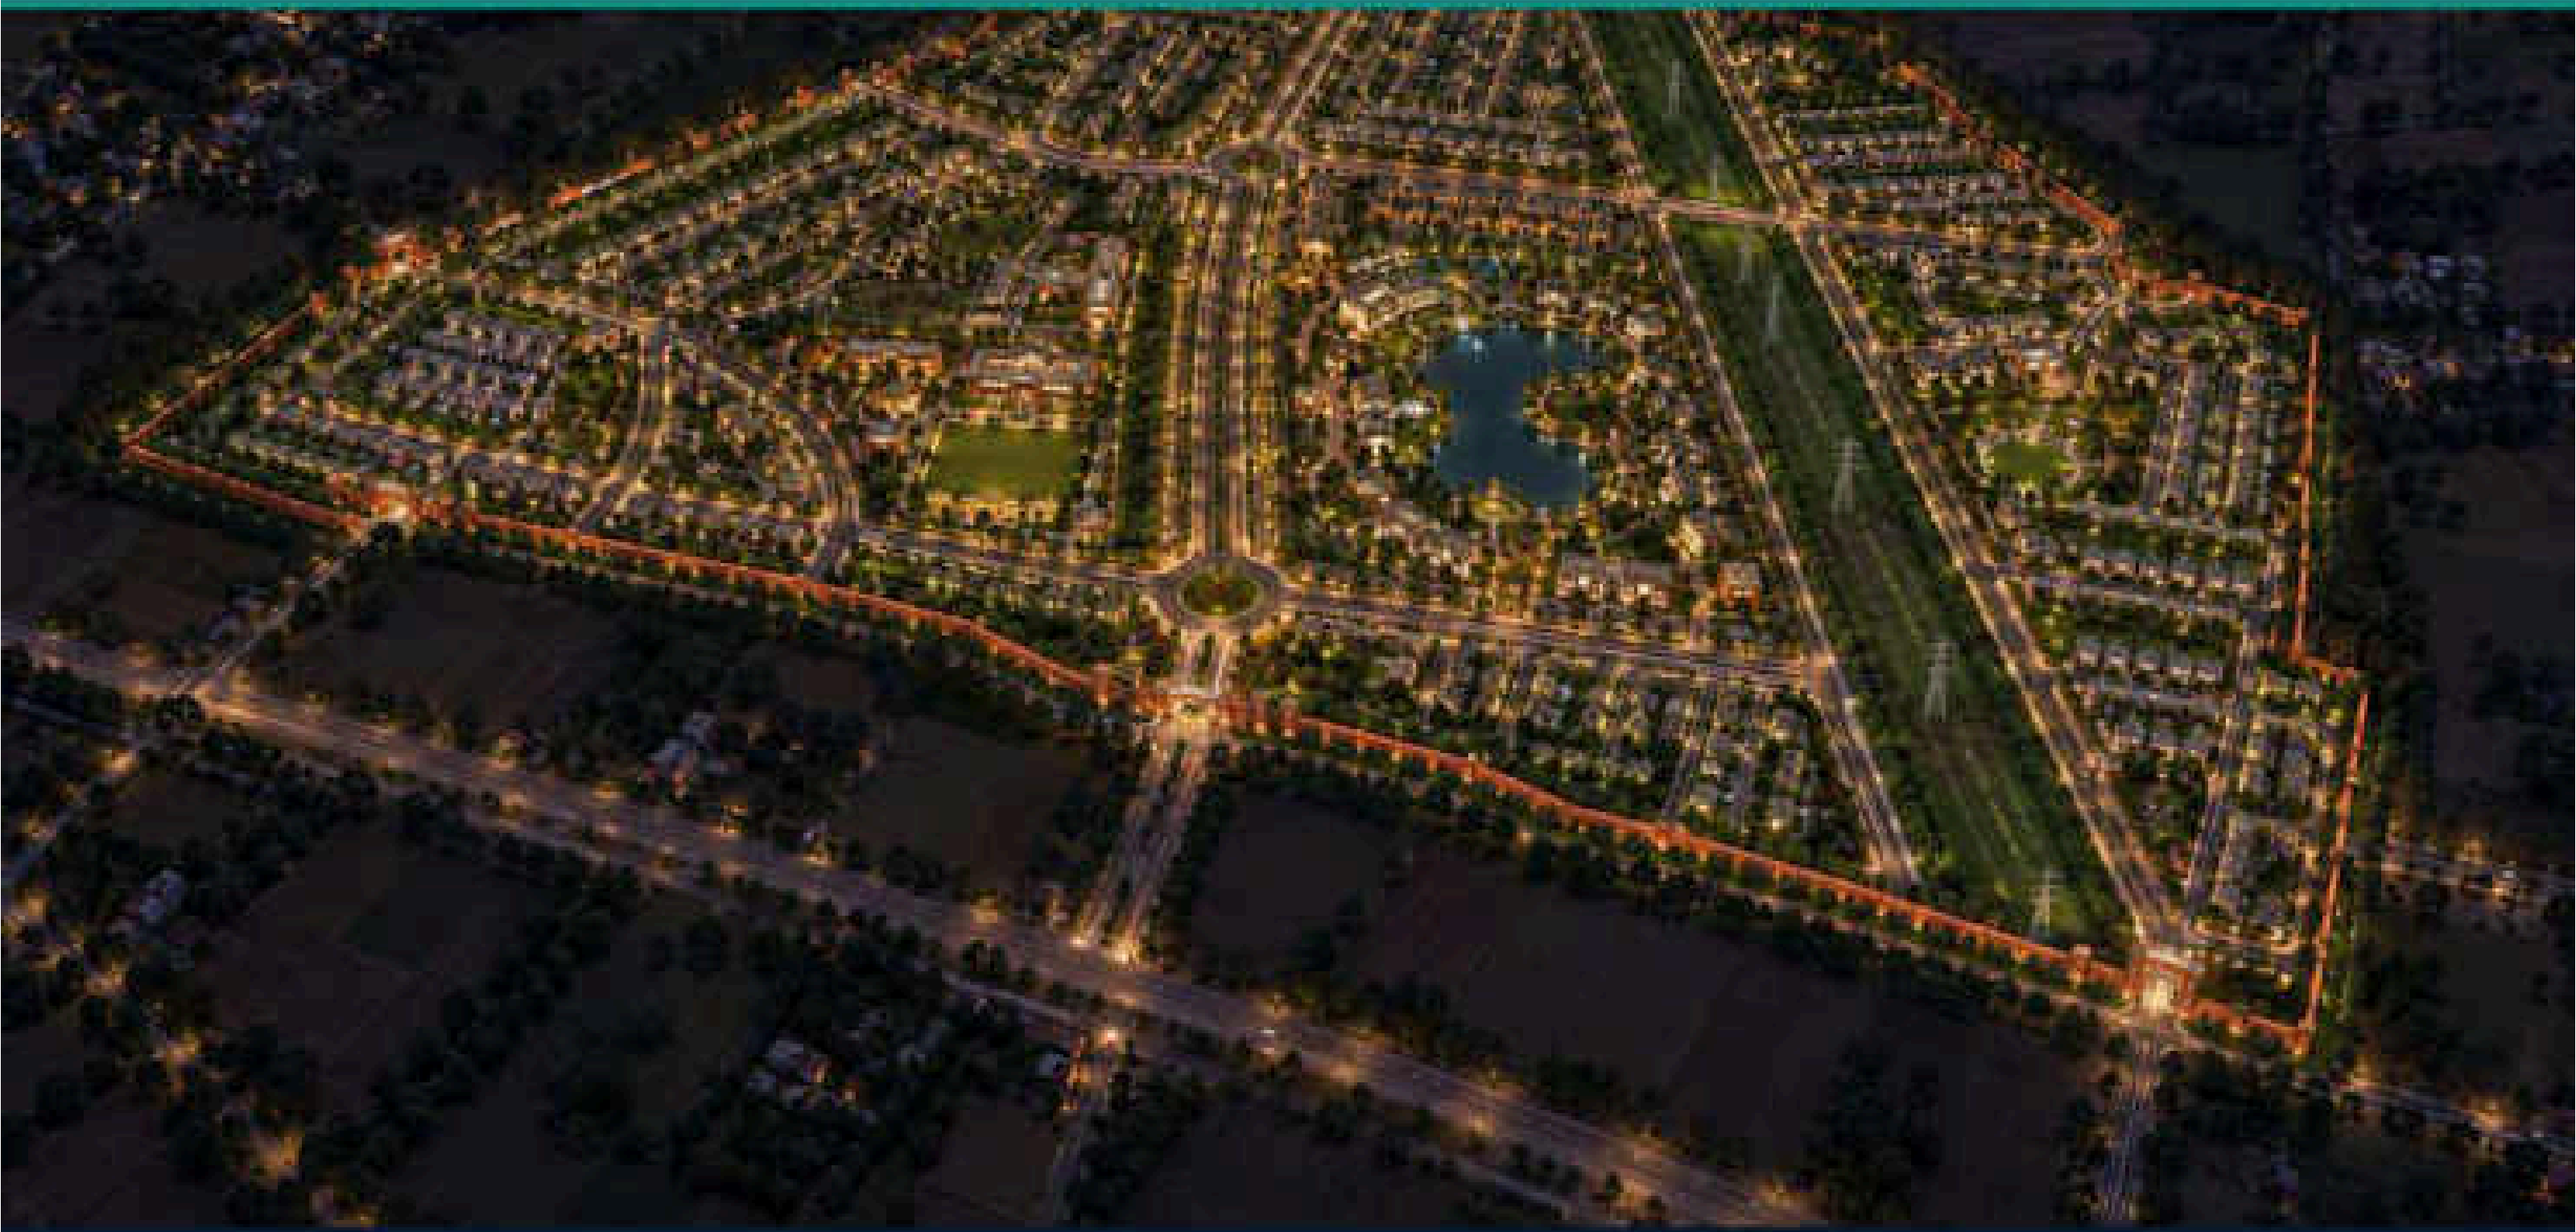

AERIAL 21 P1 PHASE FRAME



AERIAL 22 P1 PLOT GRID



AERIAL 23 P2 DUAL SIDE CORRIDOR



AERIAL 24 P2 ROAD HIERARCHY



AERIAL 25 P3 CROSSING PLAN



AERIAL 26 P3 CENTRAL GREEN



AERIAL 27 P4 SPORT EDGE



AERIAL 28 P4 PLOT NEIGHBOURHOOD



AERIAL 29 P5 LAKE BOUNDARY



[illegible]


AERIAL 30 FULL ESTATE DAY




LAKE 21 P1 GREEN ARRIVAL




LAKE 22 P1 WATERFRONT GATEWAY

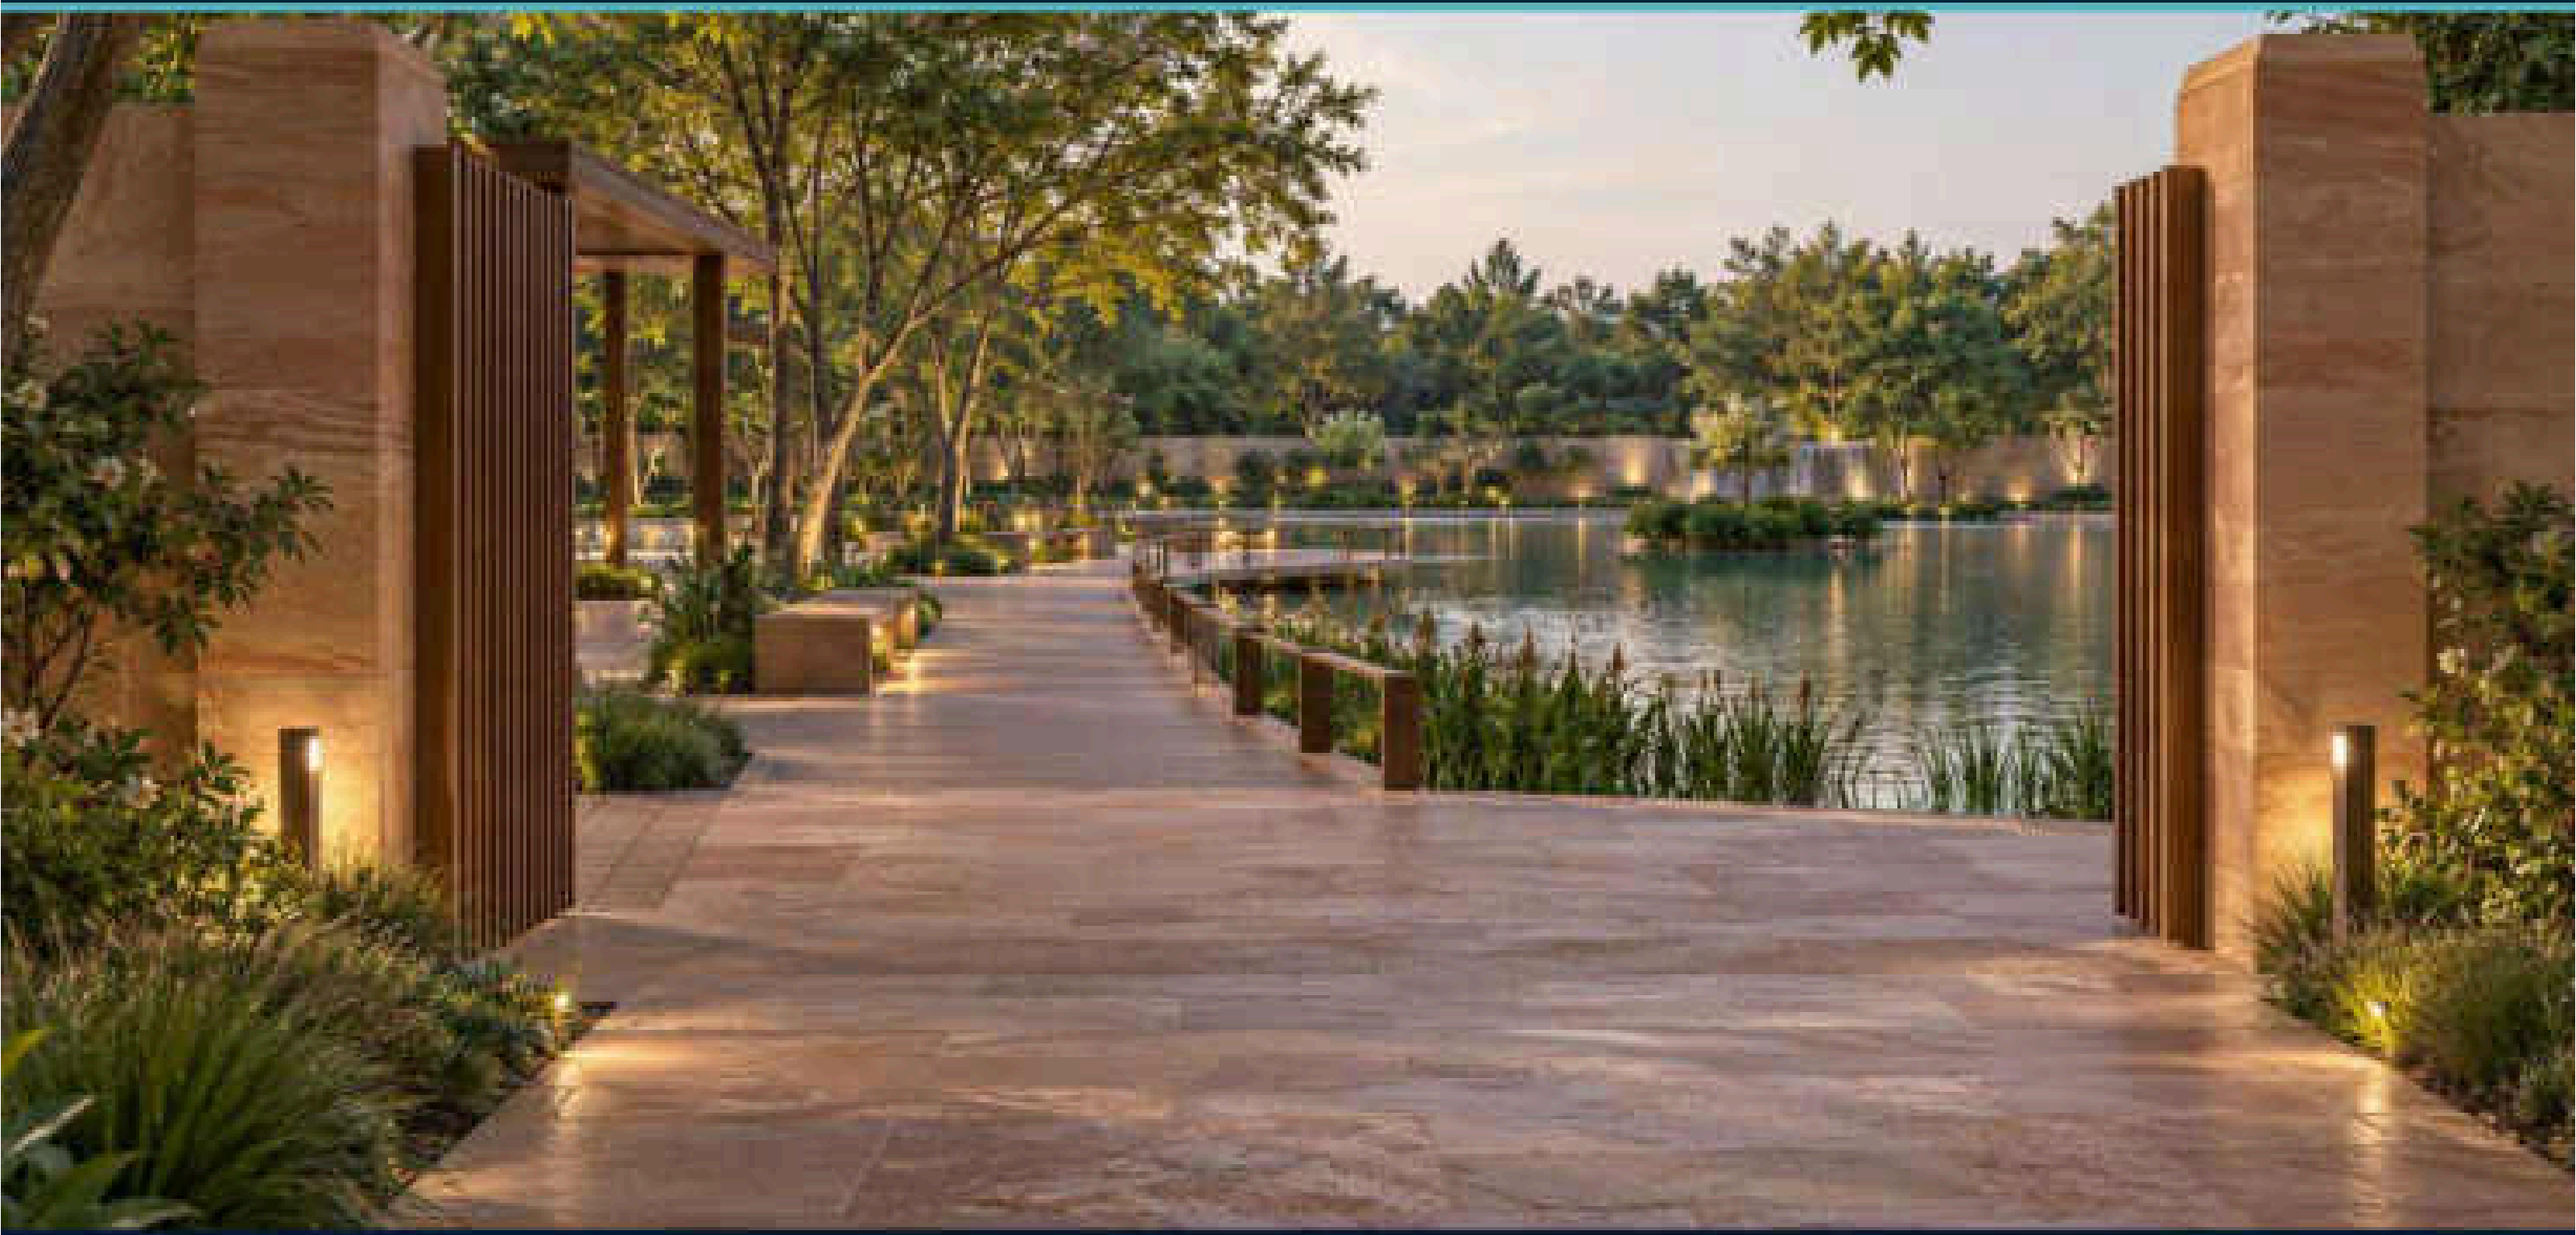


LAKE 23 P2 BOARDWALK

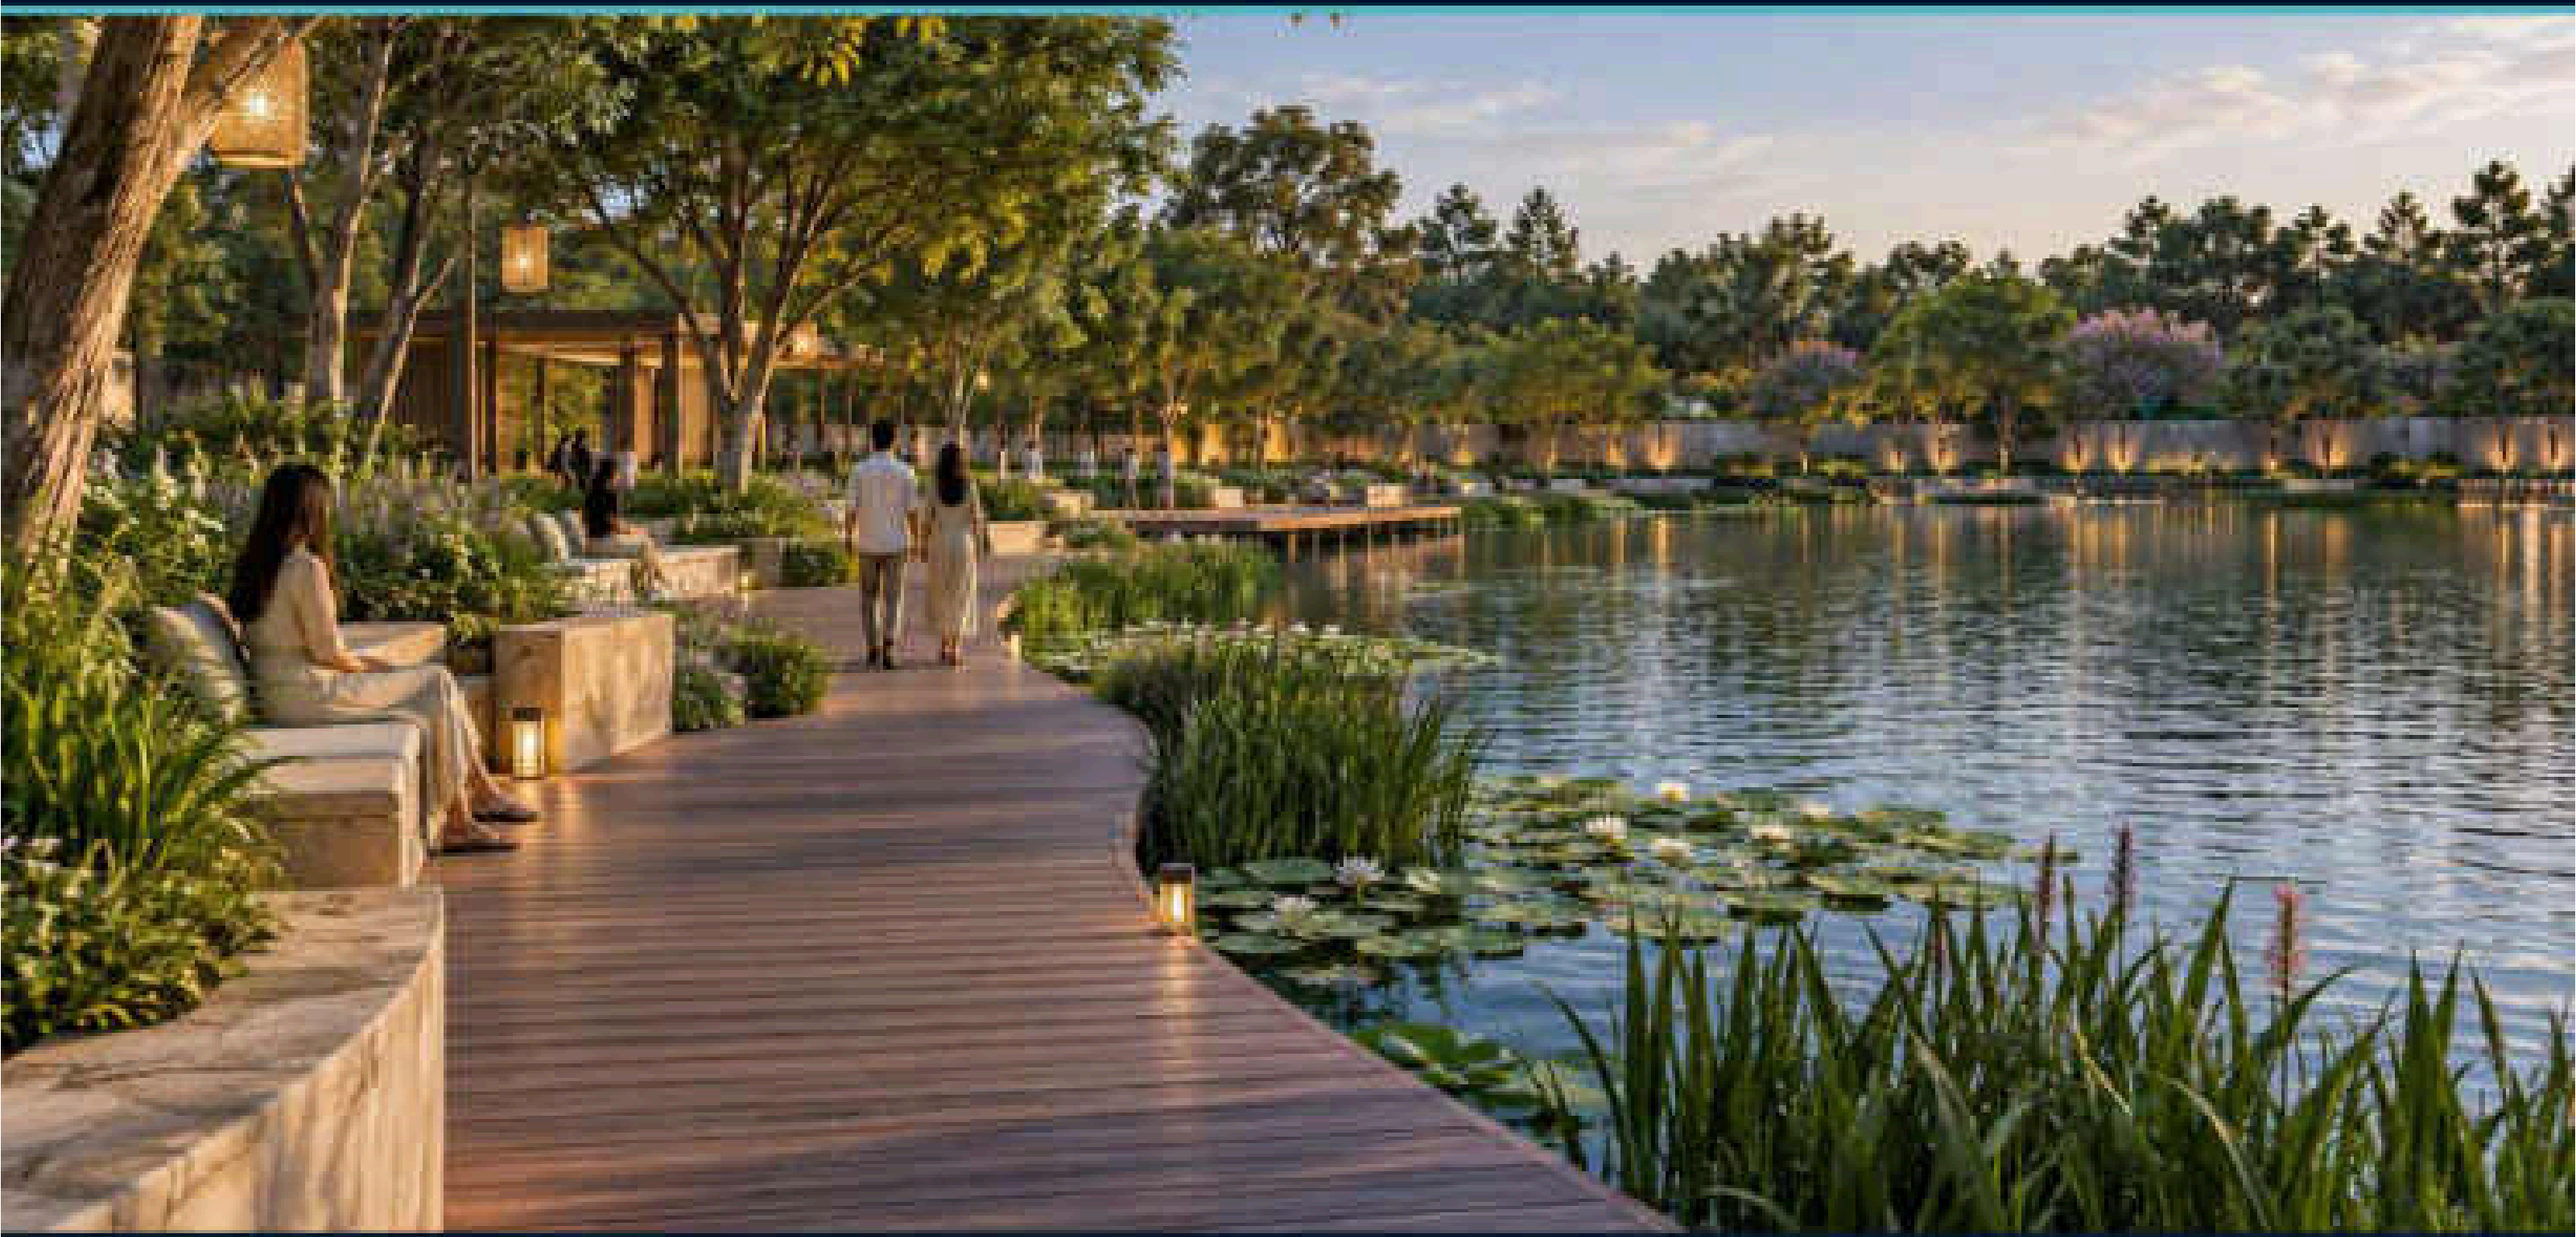

LAKE 24 P2 ACCESSIBLE RAMP

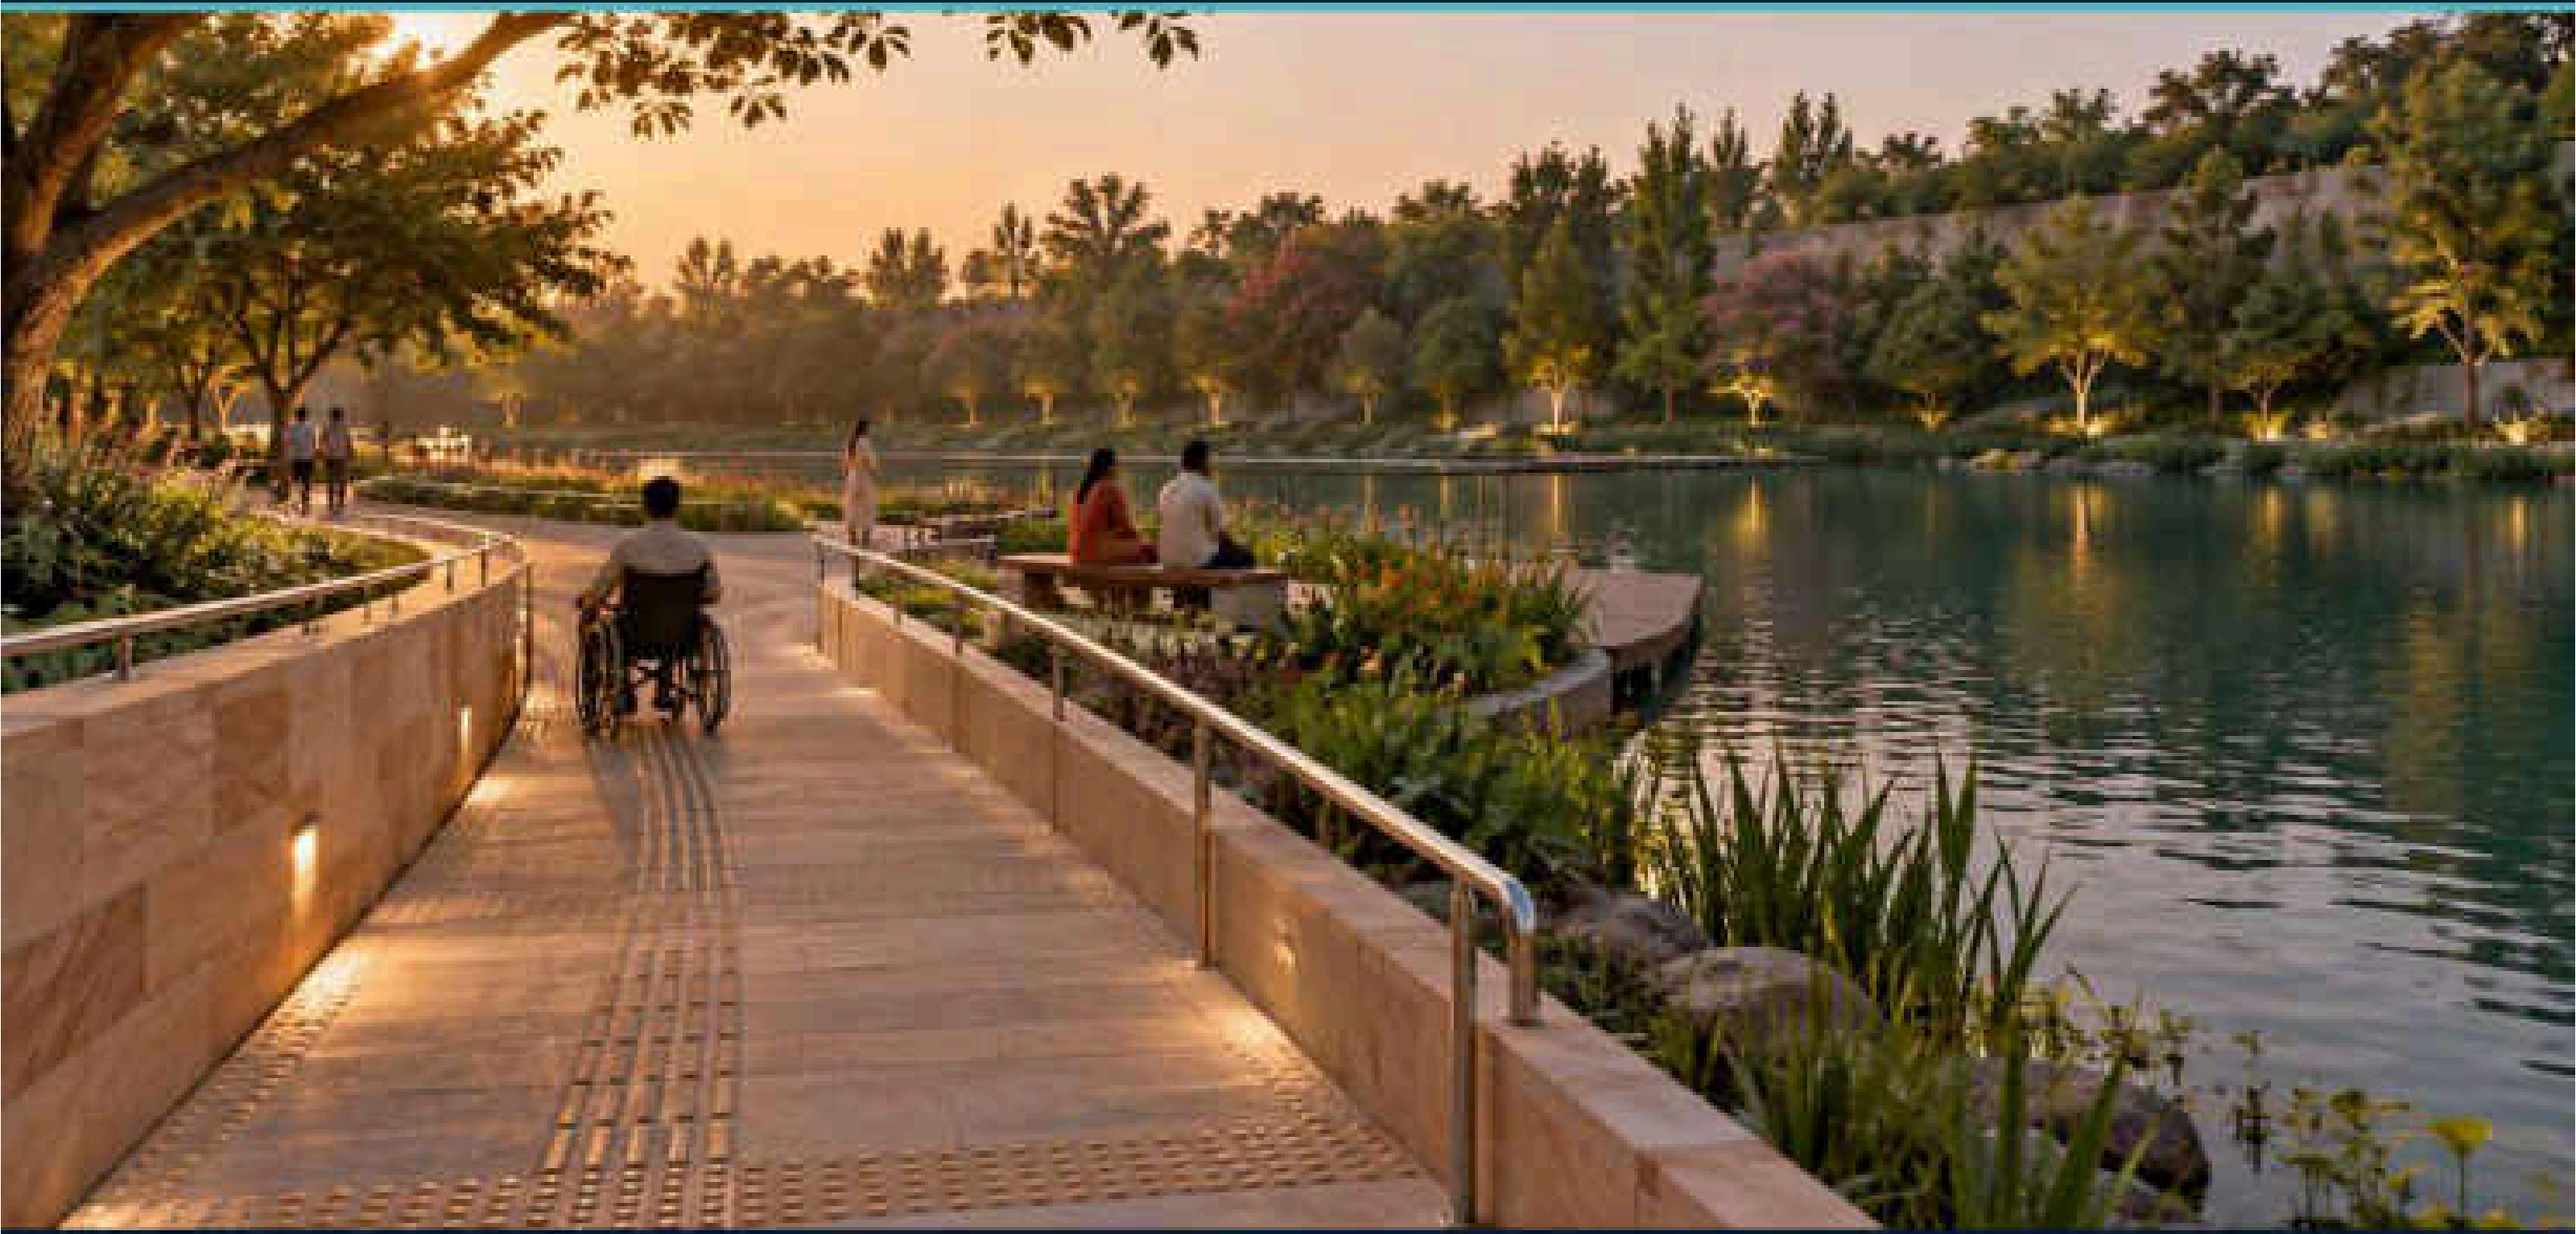


LAKE 25 P3 BRIDGE CROSSING

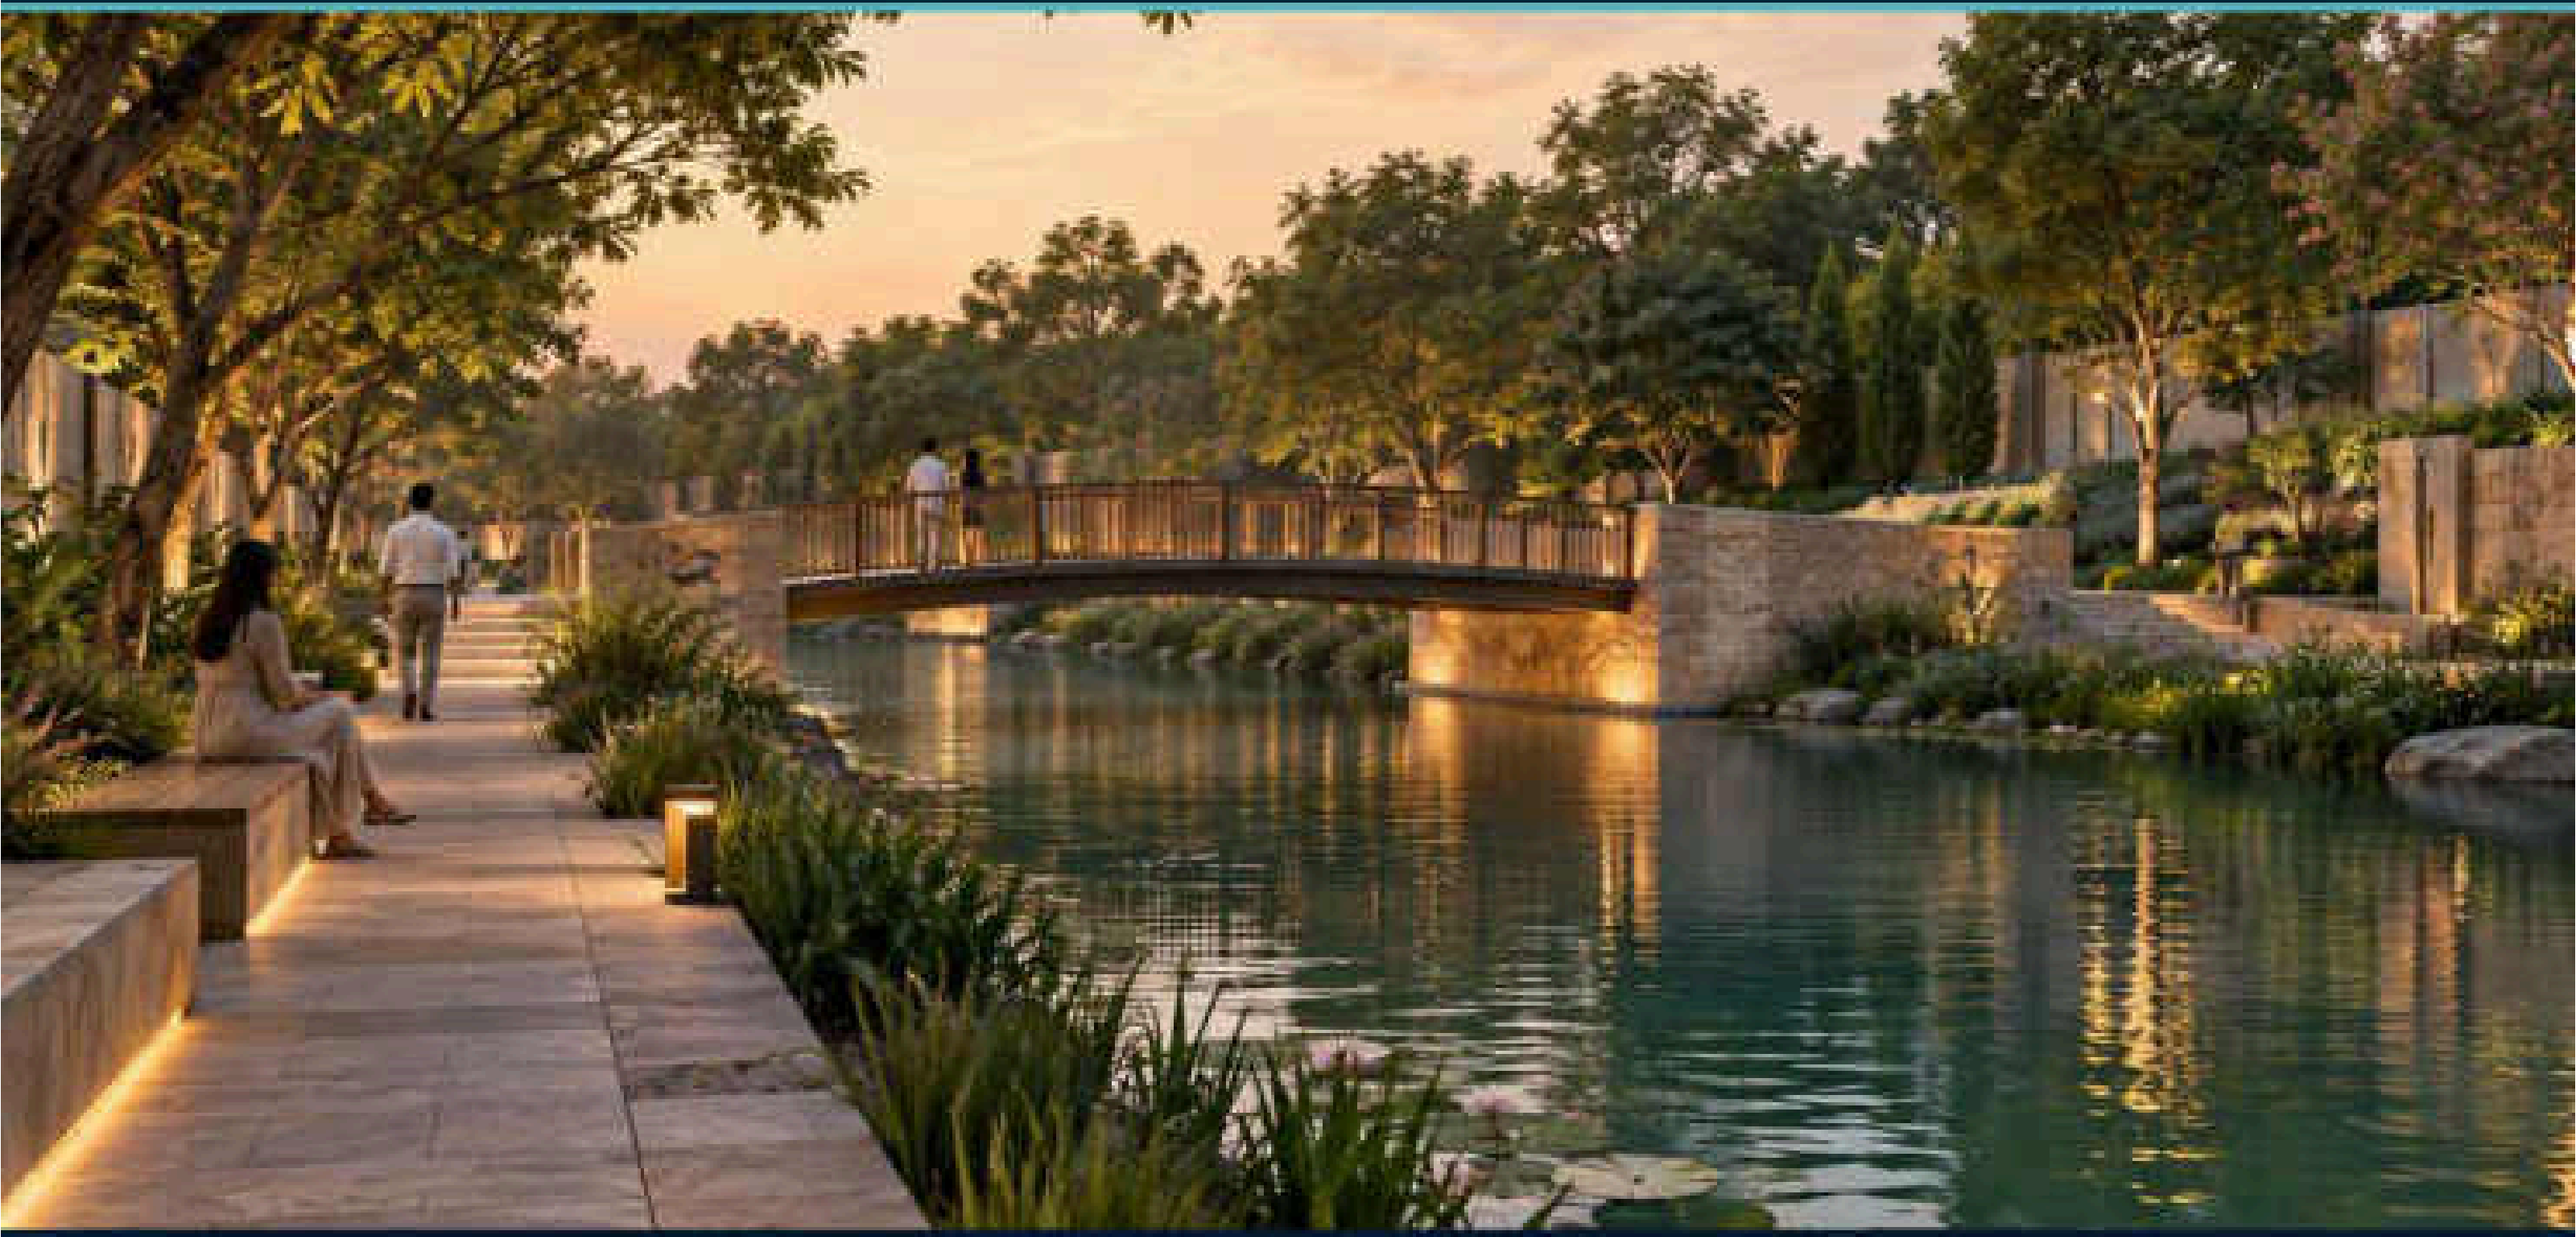

LAKE 26 P3 NATURE LEARNING



LAKE 27 P4 QUIET PROM WALK

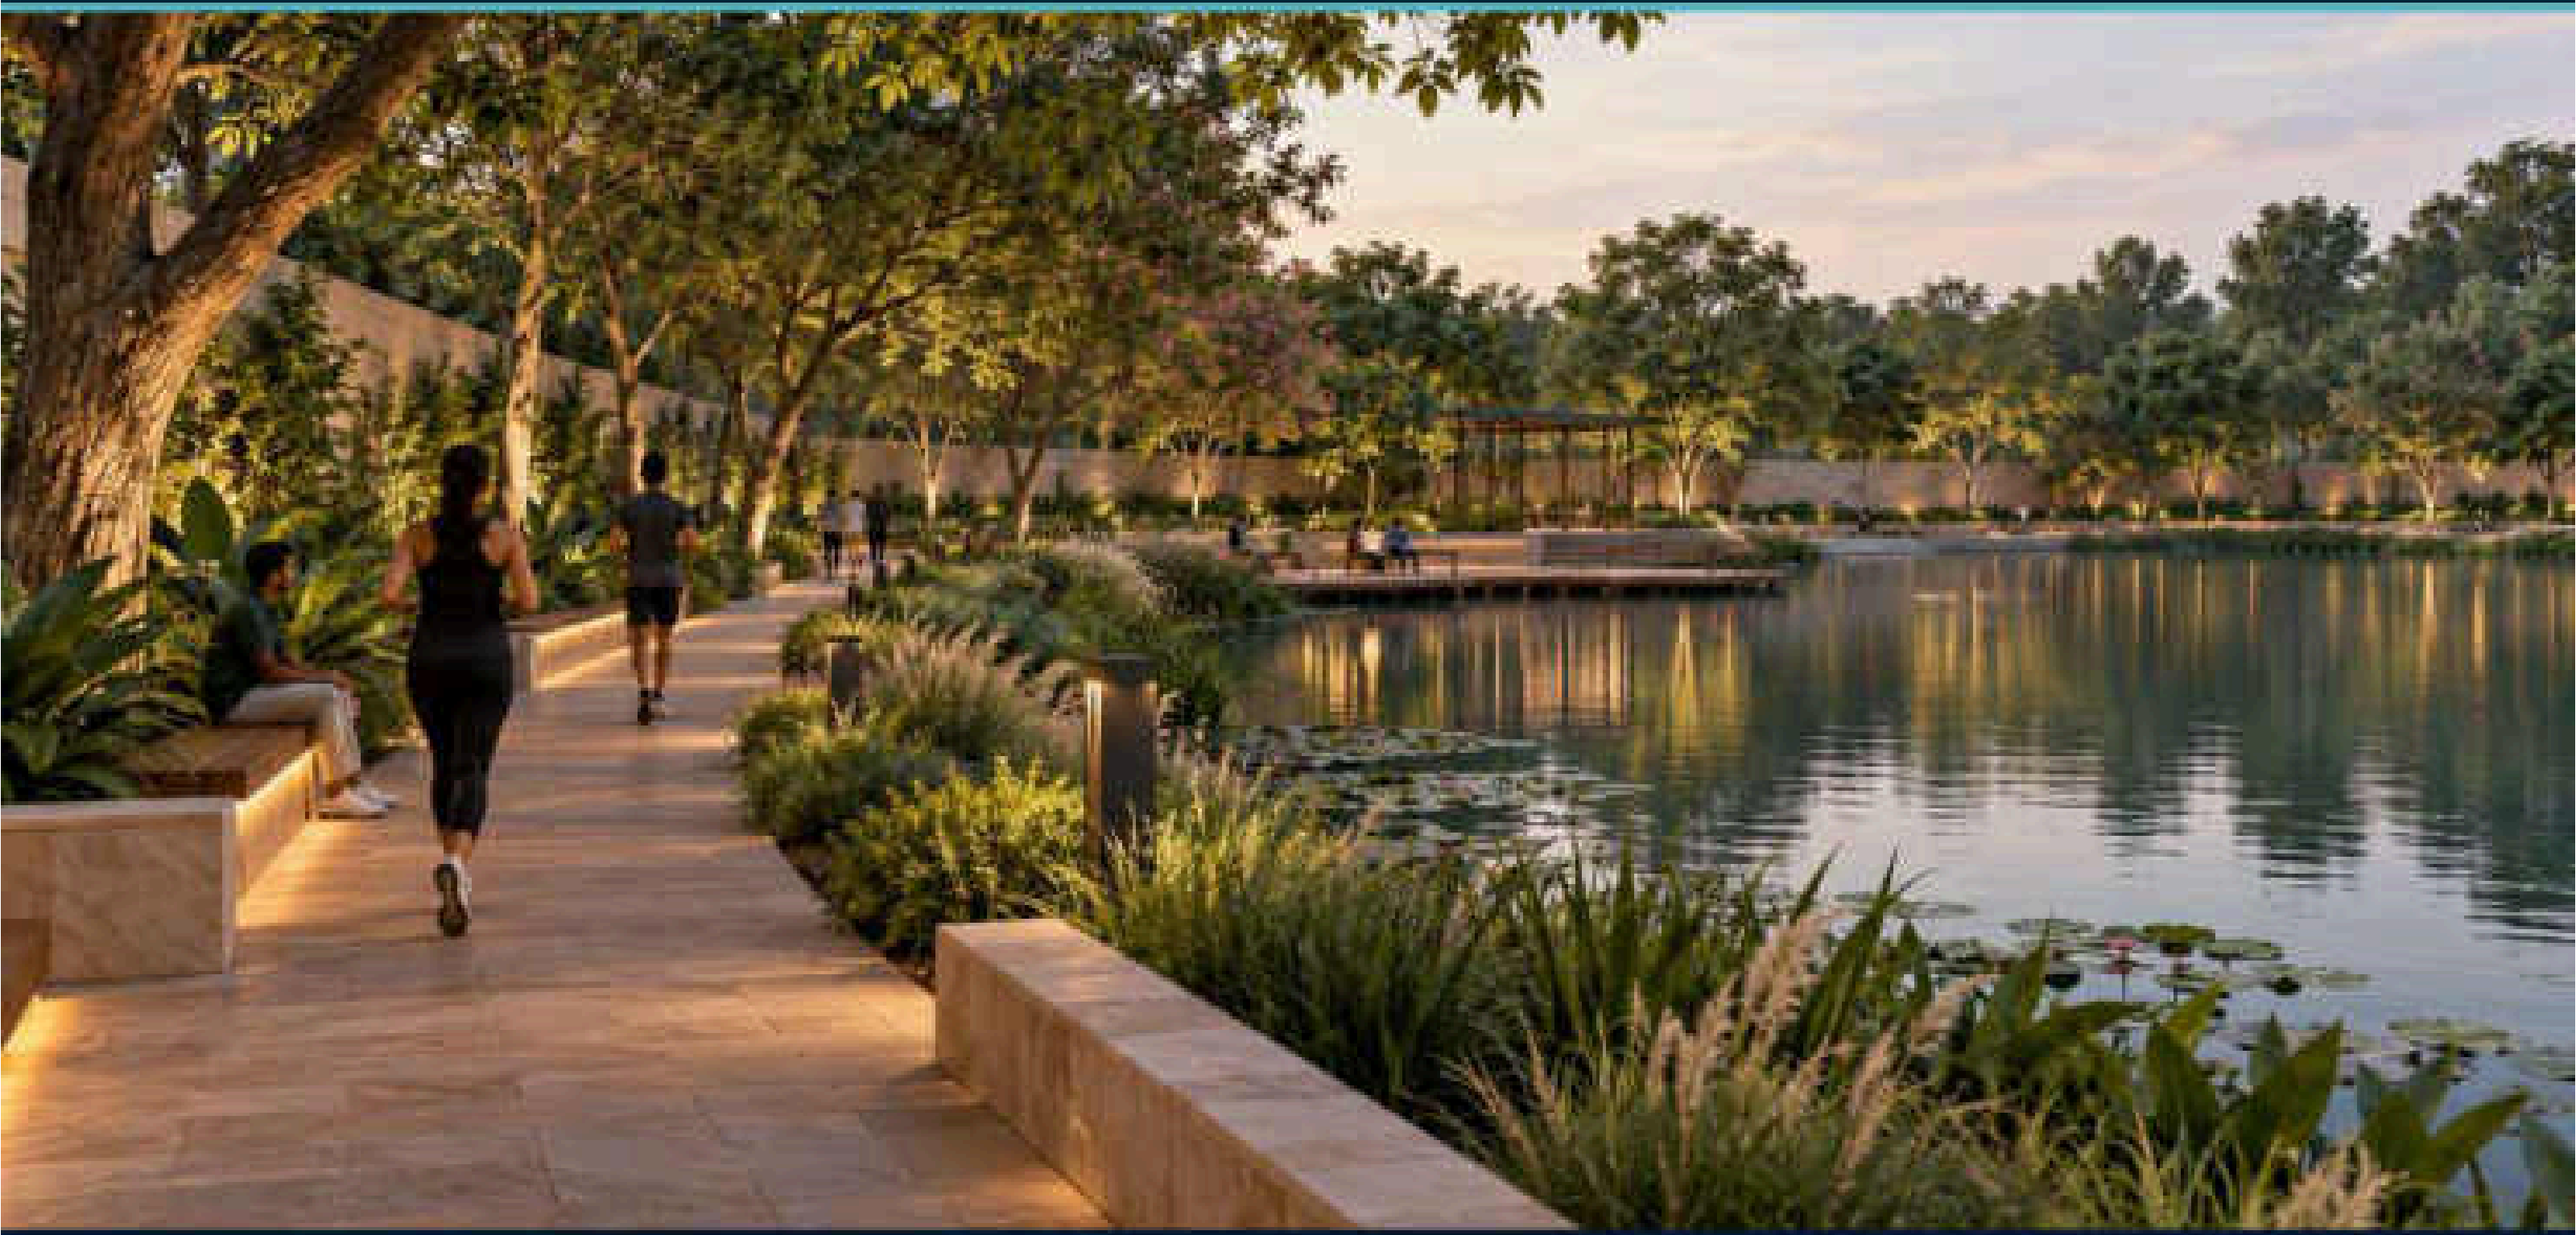


LAKE 28 P4 RAIN GARDEN



LAKE 29 P5 CLUBHOUSE ARRIVAL




LAKE 30 P5 LAKE NIGHT

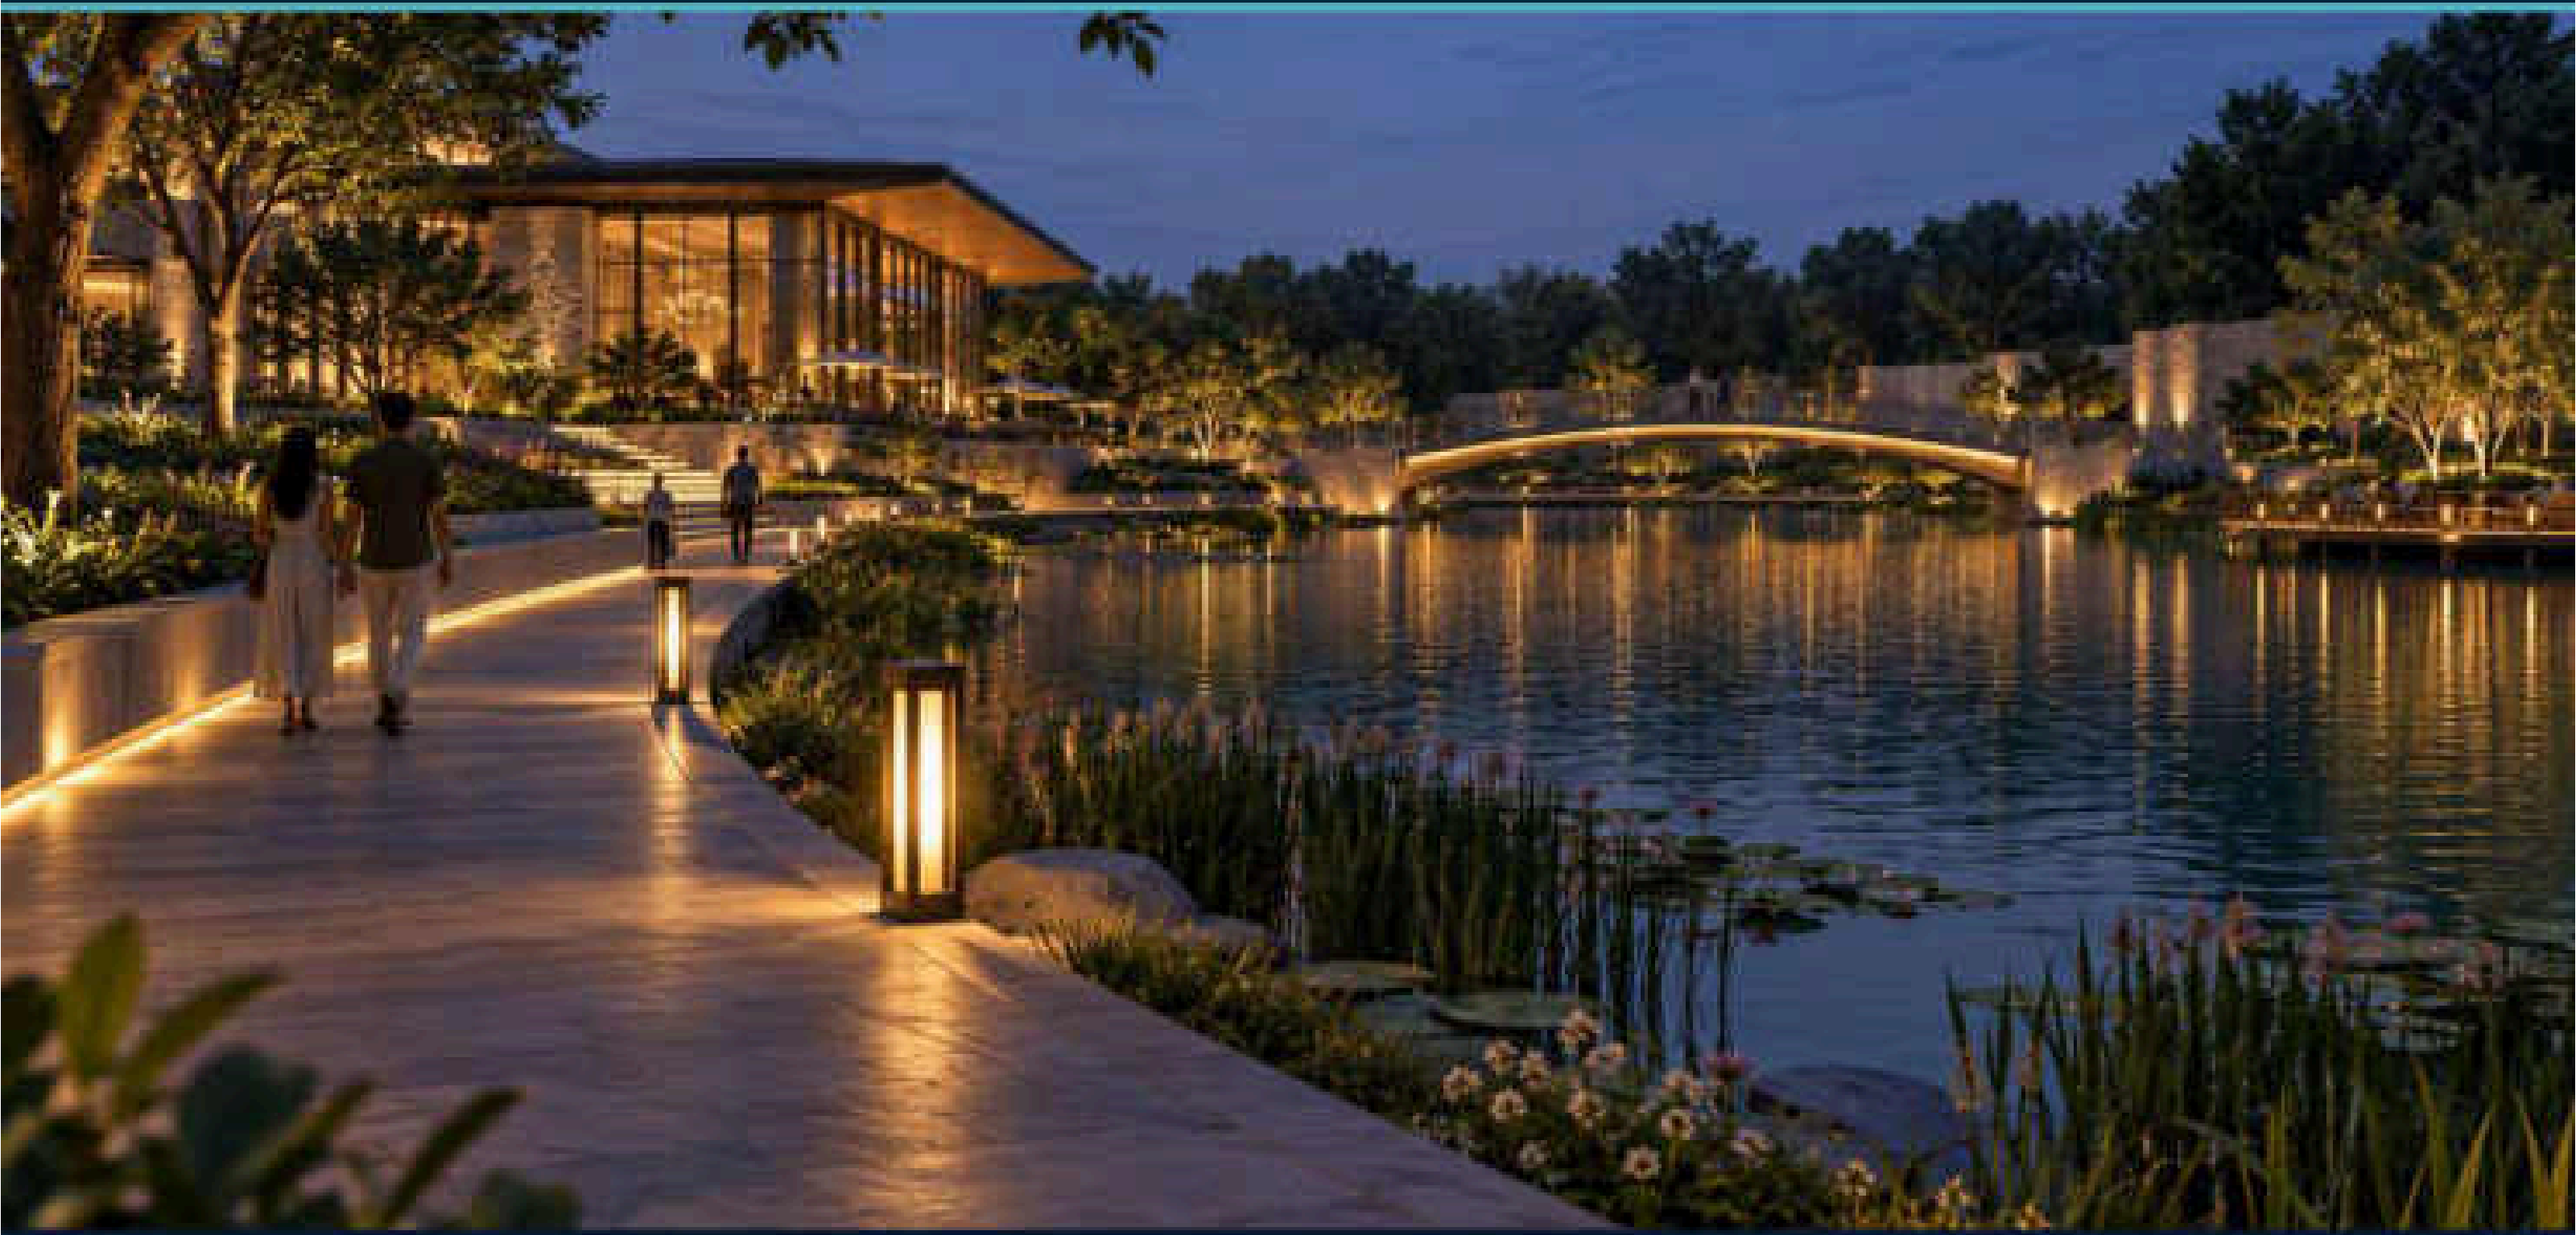

P1 ENTRY AND FIRST NEIGHBOURHOOD

Protect the entrance sightline, family park and first plot clusters.

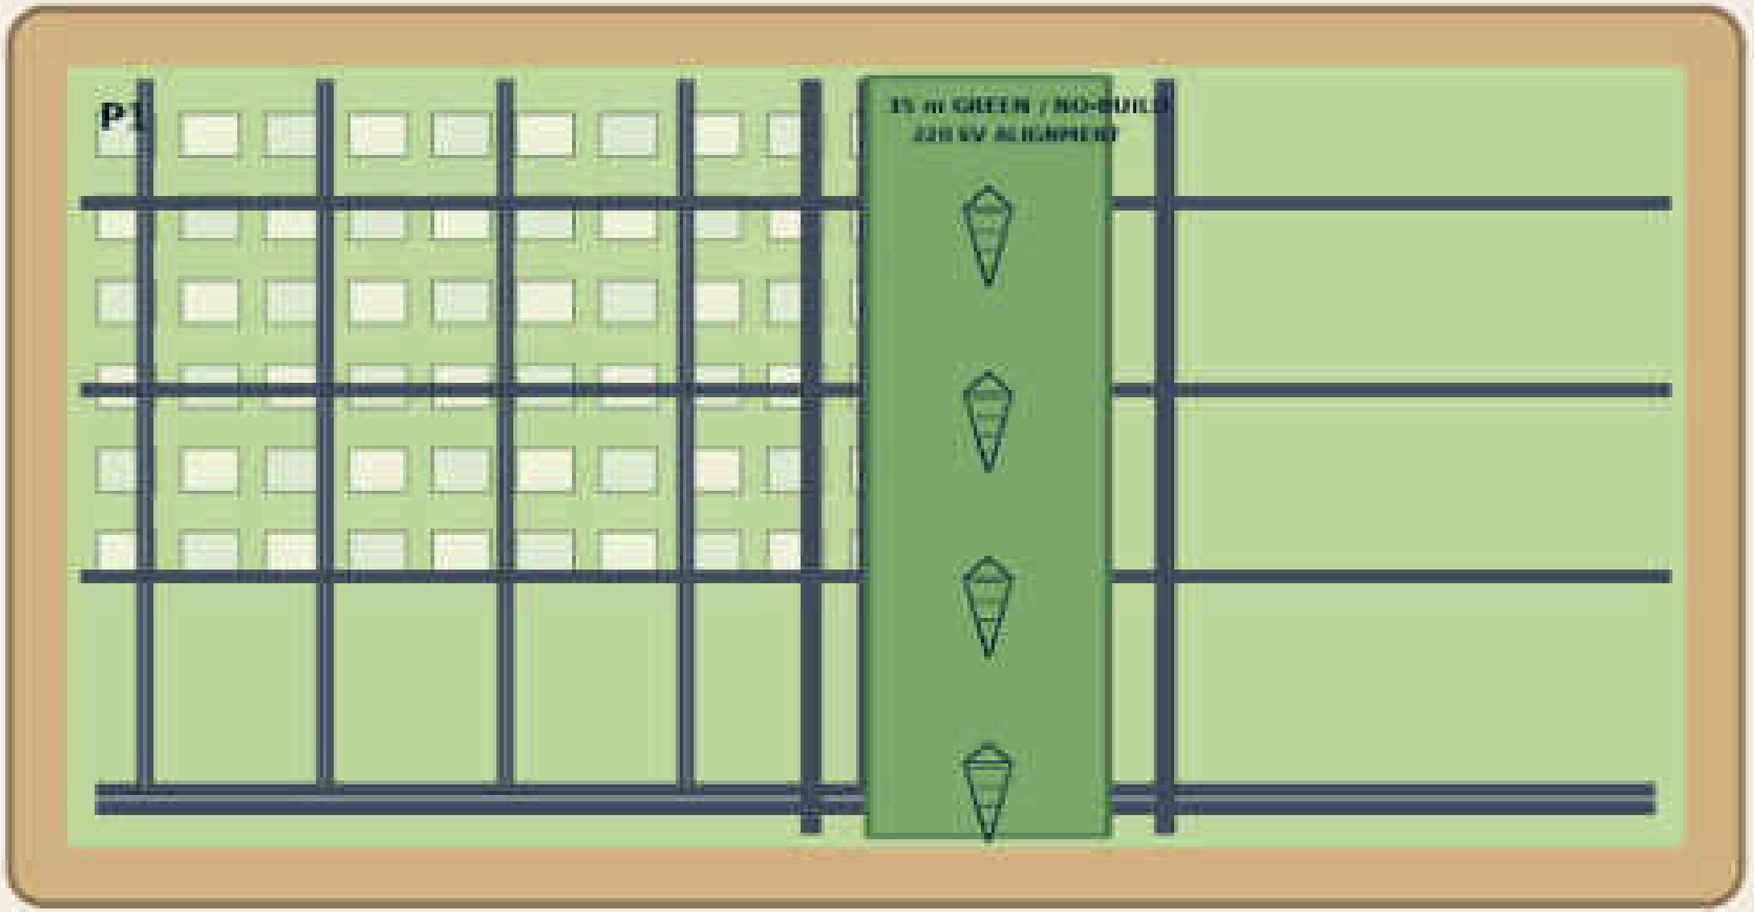

READ THE PLAN

01 Boundary

Dry outer context kept outside the estate

02 Roads

R01 boulevard, R02 collectors and R03 lo

03 HT band


35 m green/no-build corridor with 9 m fla

04 Parks

Green network is continuous through the

P1 ROAD AND GREEN FRAMEWORK

Keep the first release legible through one boulevard and clear collectors.

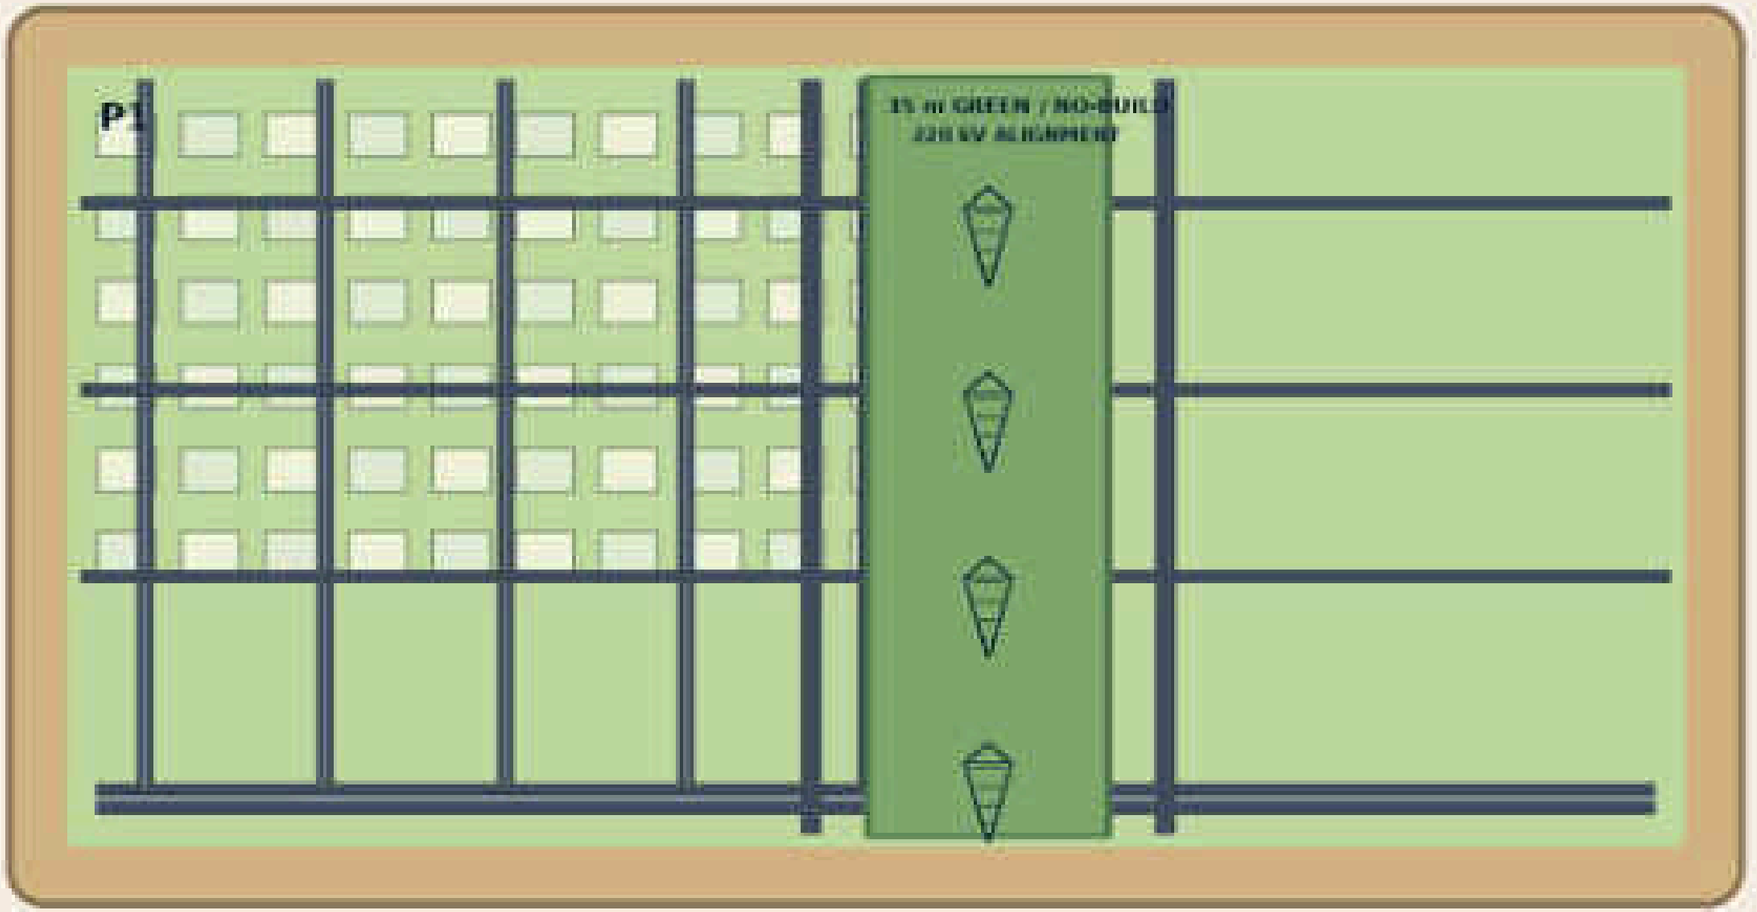

READ THE PLAN

01 Boundary

Dry outer context kept outside the estate

02 Roads

R01 boulevard, R02 collectors and R03 lo

03 HT band


35 m green/no-build corridor with 9 m fla

04 Parks

Green network is continuous through the

P2 DUAL-SIDE CORRIDOR PLANNING

Replot clusters on both sides of the HT band; keep the strip open.

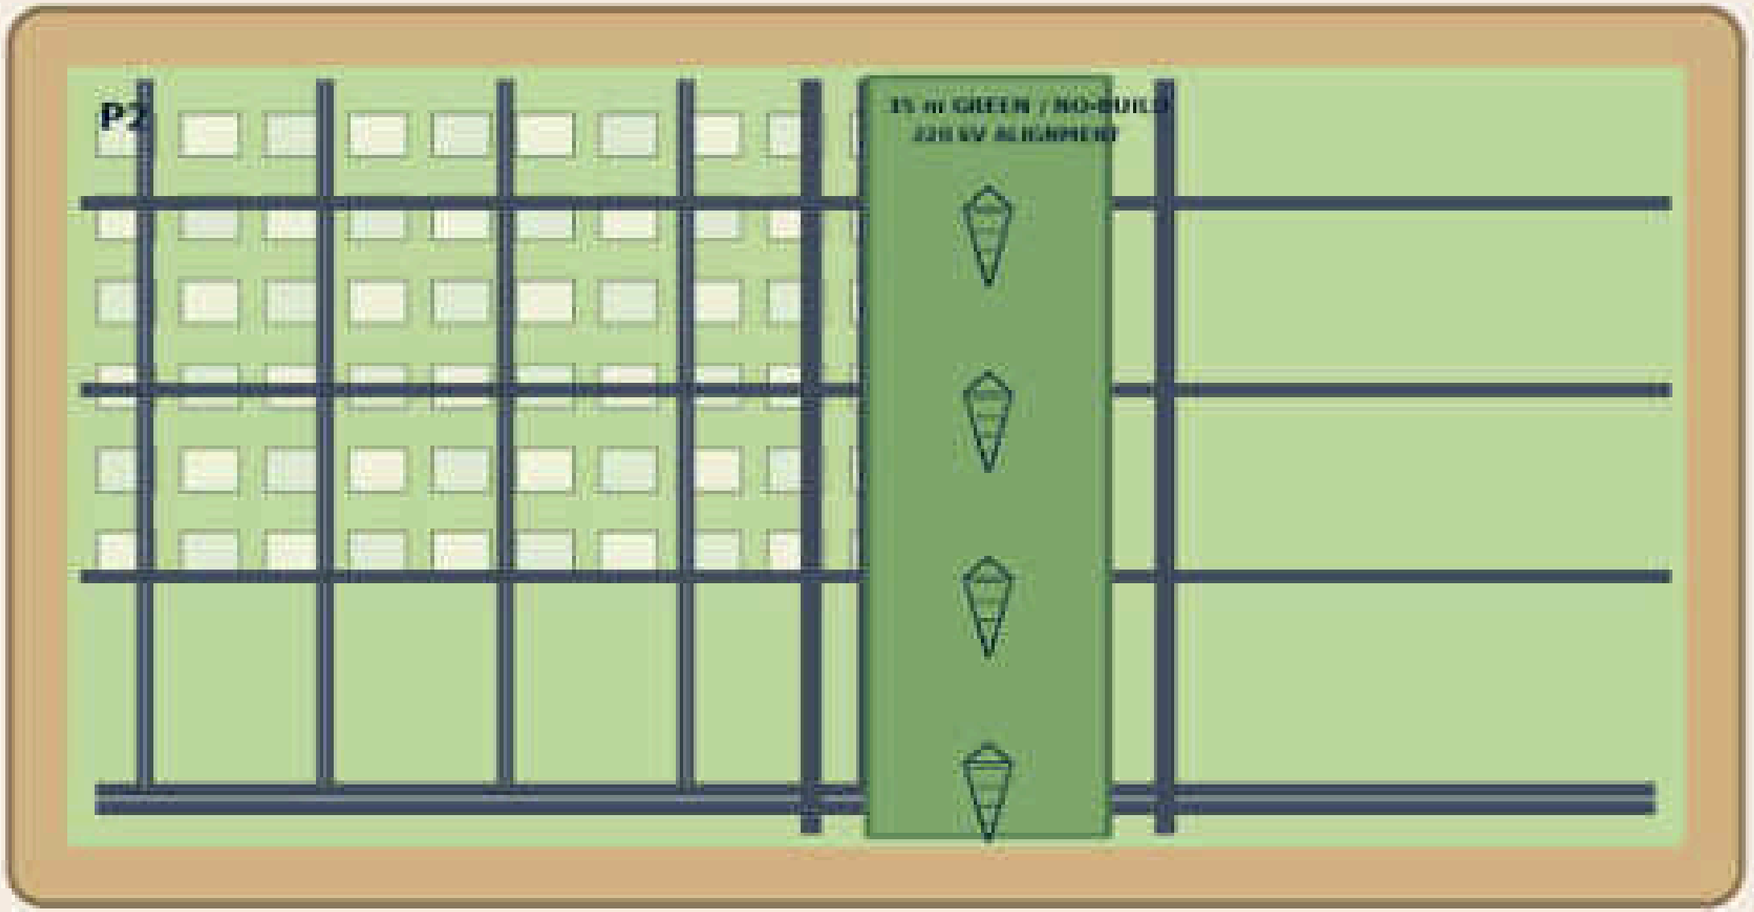

READ THE PLAN

01 Boundary

Dry outer context kept outside the estate

02 Roads

R01 boulevard, R02 collectors and R03 lo

03 HT band


35 m green/no-build corridor with 9 m fla

04 Parks

Green network is continuous through the

P2 FLANK-ROAD FRAMEWORK

Place the two 9 m flank roads outside the green/no-build corridor.

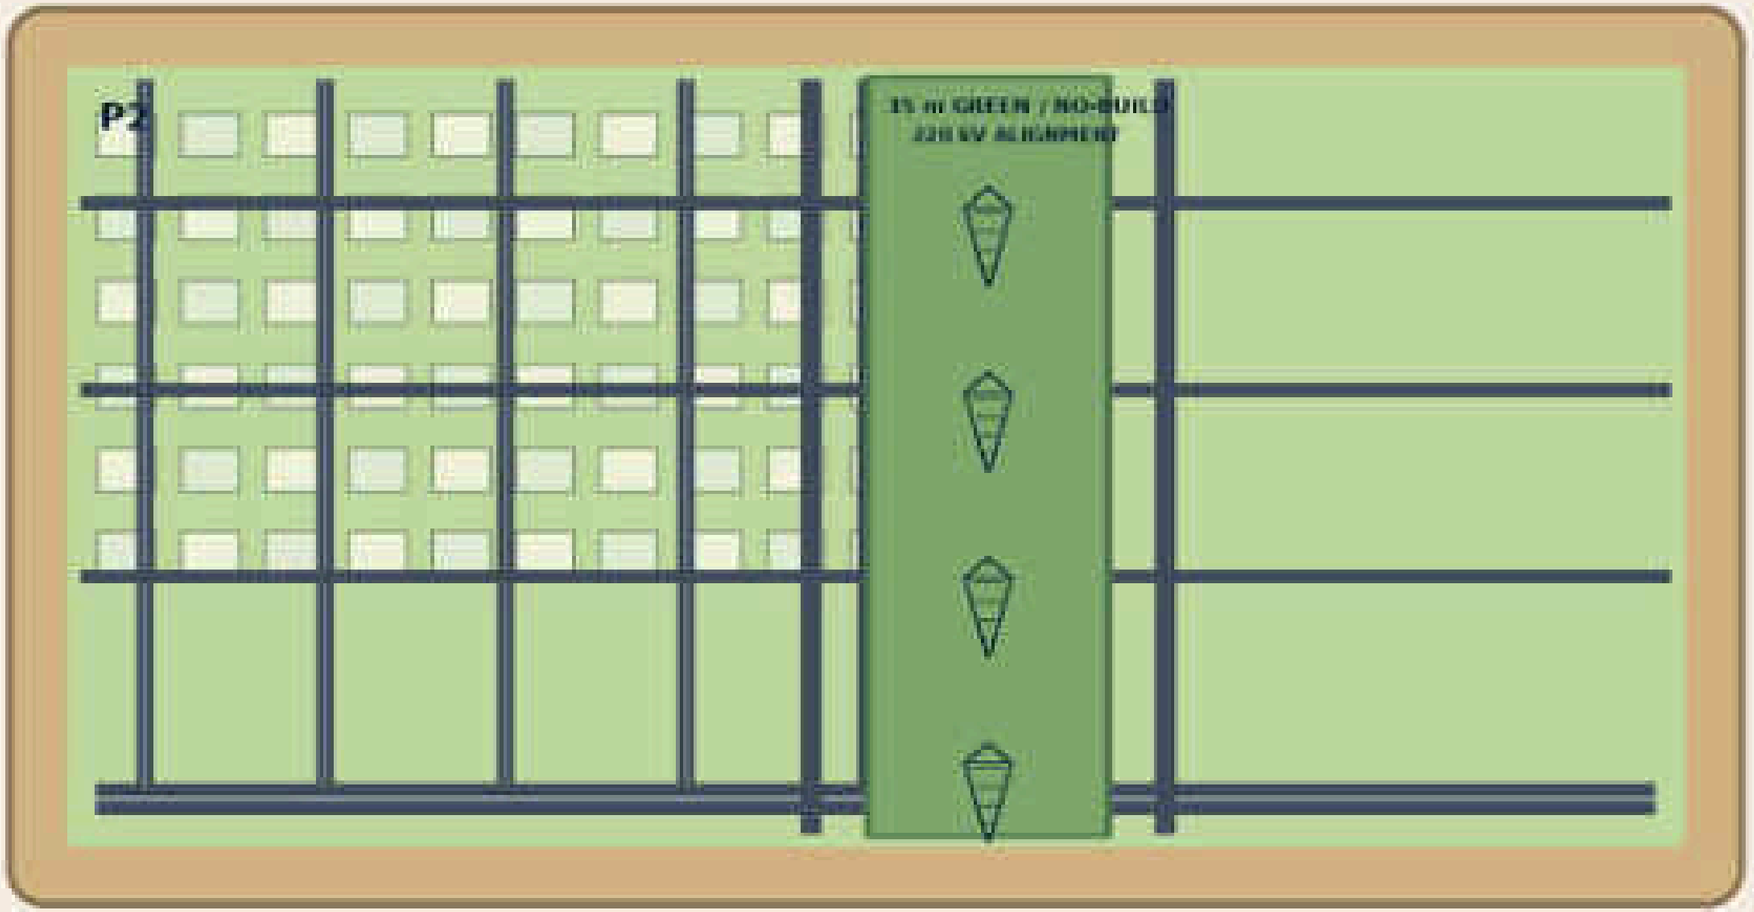

READ THE PLAN

01 Boundary

Dry outer context kept outside the estate

02 Roads

R01 boulevard, R02 collectors and R03 lo

03 HT band

35 m green/no-build corridor with 9 m fla


04 Parks

Green network is continuous through the

© Concept visualisation. Any external publication requires permission.

P3 ENGINEERED CROSSING NODE

Connect the phases without placing plots or built amenity in the band.

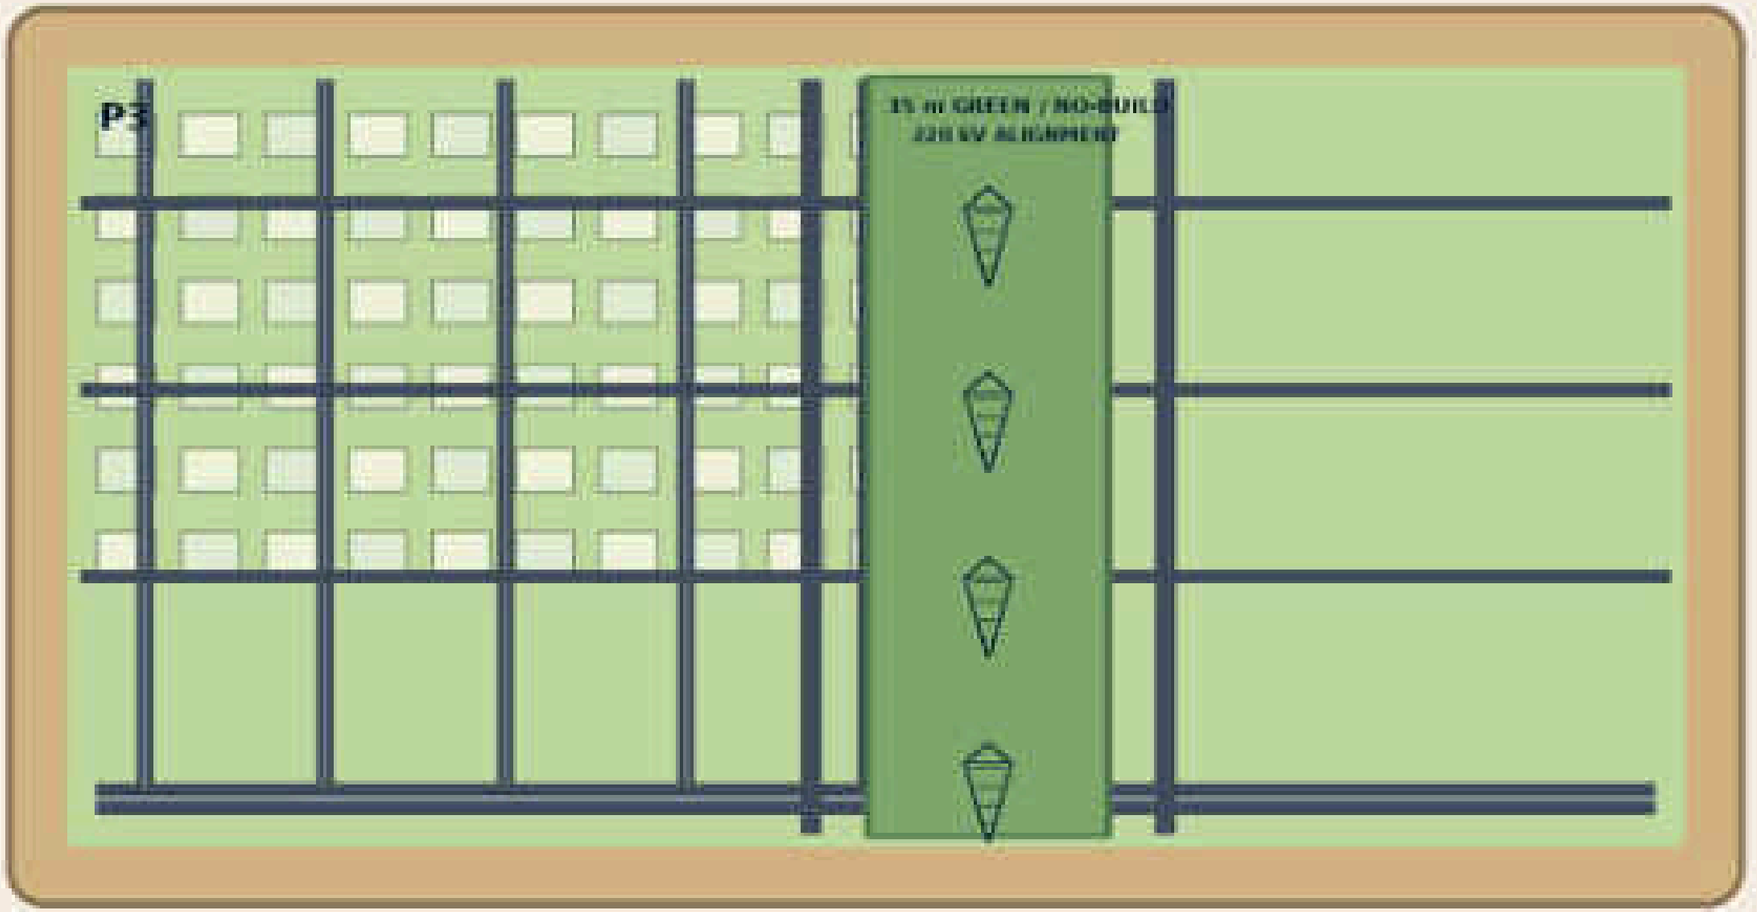

READ THE PLAN

01 Boundary

Dry outer context kept outside the estate

02 Roads

R01 boulevard, R02 collectors and R03 lo

03 HT band


35 m green/no-build corridor with 9 m fla

04 Parks

Green network is continuous through the

P3 CENTRAL GREEN NETWORK

Link parks and local streets with a controlled crossing strategy.

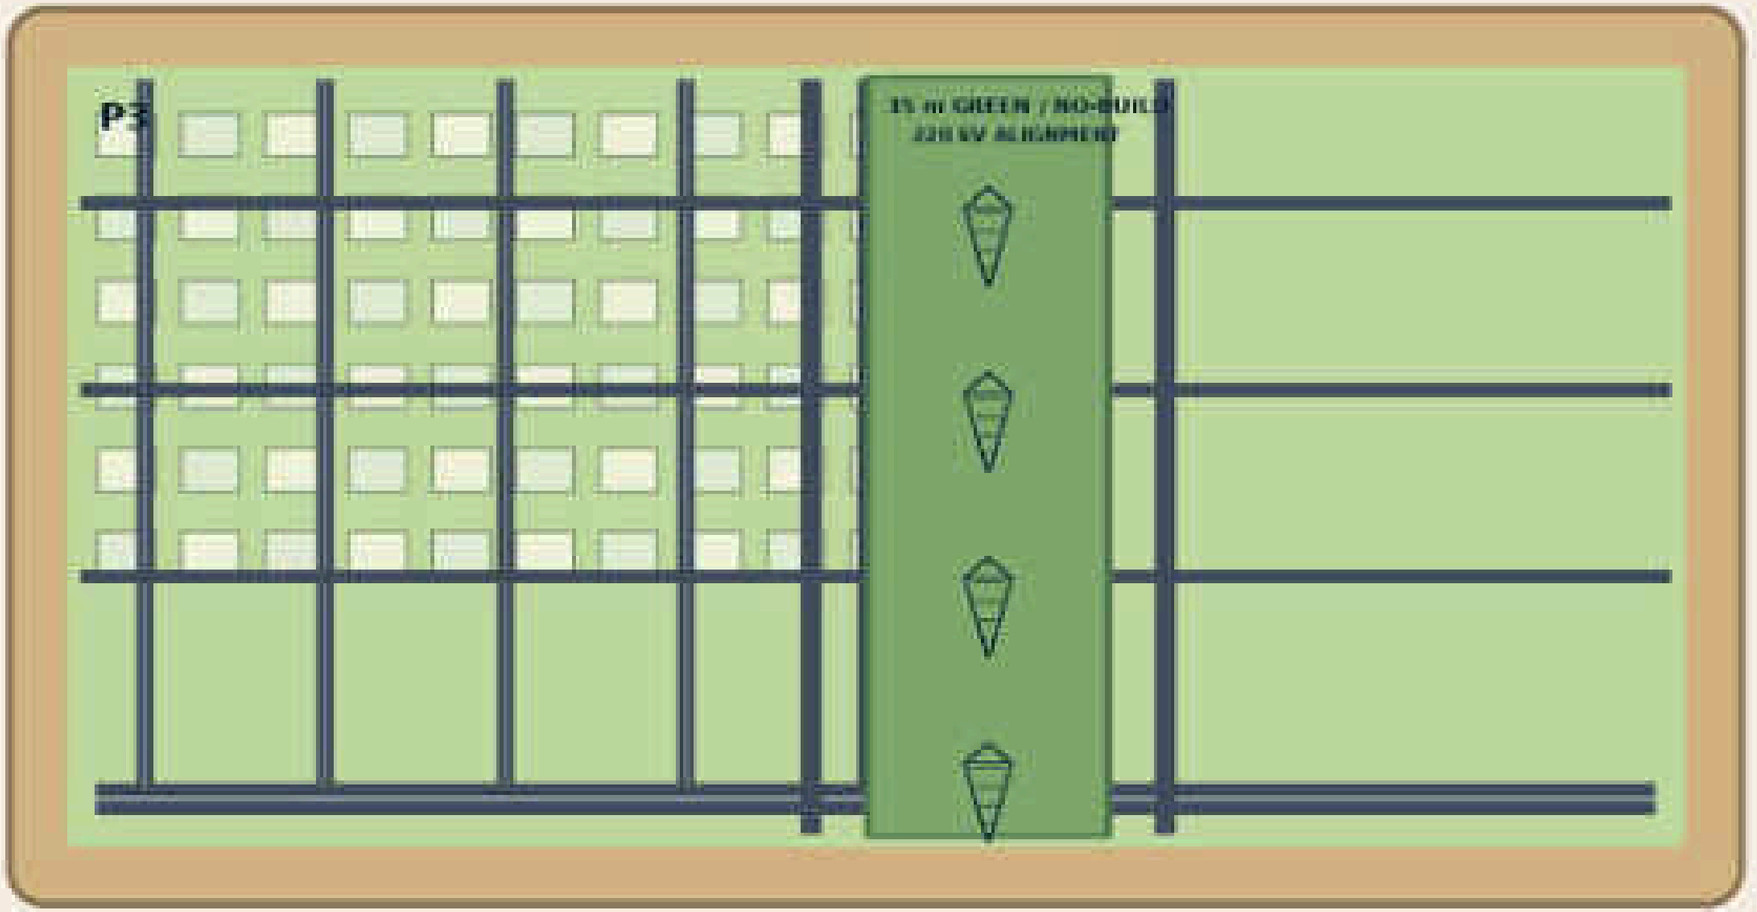

READ THE PLAN

01 Boundary

Dry outer context kept outside the estate

02 Roads

R01 boulevard, R02 collectors and R03 lo

03 HT band


35 m green/no-build corridor with 9 m fla

04 Parks

Green network is continuous through the

P4 QUIET SPORT EDGE

Place quiet sport beyond the road edge, never under the wires.

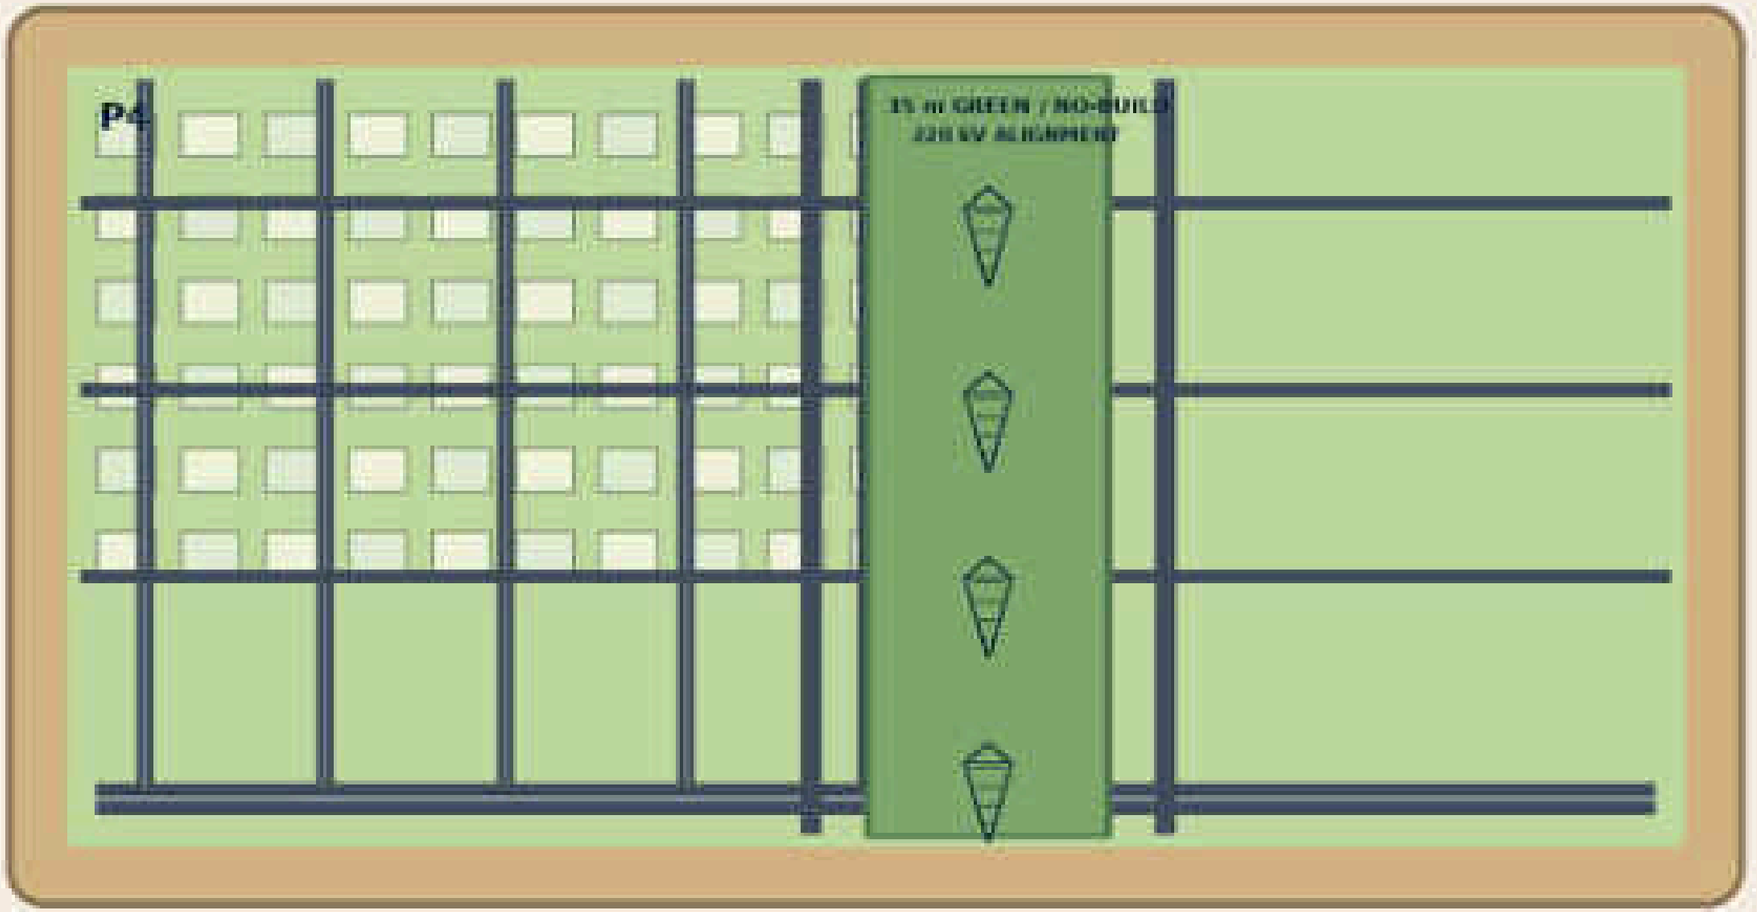

READ THE PLAN

01 Boundary

Dry outer context kept outside the estate

02 Roads

R01 boulevard, R02 collectors and R03 lo

03 HT band


35 m green/no-build corridor with 9 m fla

04 Parks

Green network is continuous through the

P4 WOODLAND NEIGHBOURHOOD

Use trees, local streets and pocket greens to slow the phase.

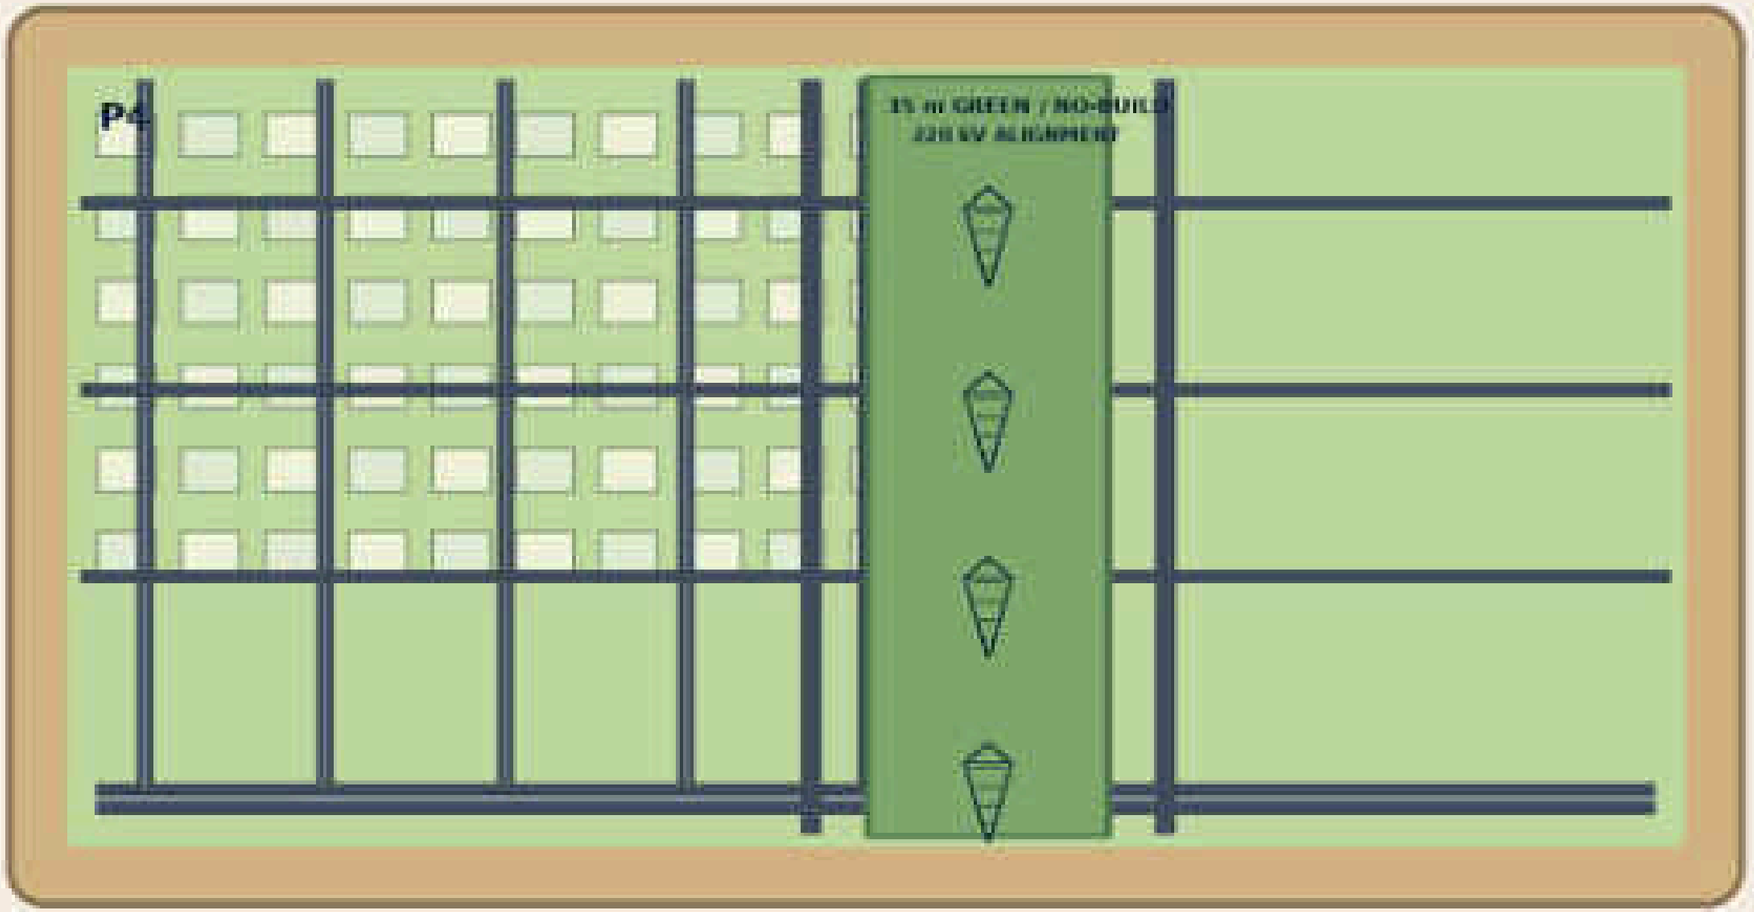

READ THE PLAN

01 Boundary

Dry outer context kept outside the estate

02 Roads

R01 boulevard, R02 collectors and R03 lo

03 HT band


35 m green/no-build corridor with 9 m fla

04 Parks

Green network is continuous through the

P5 AQUATIC AND CLUB APPROACH

Protect the internal lake and clubhouse arrival as the final destination.

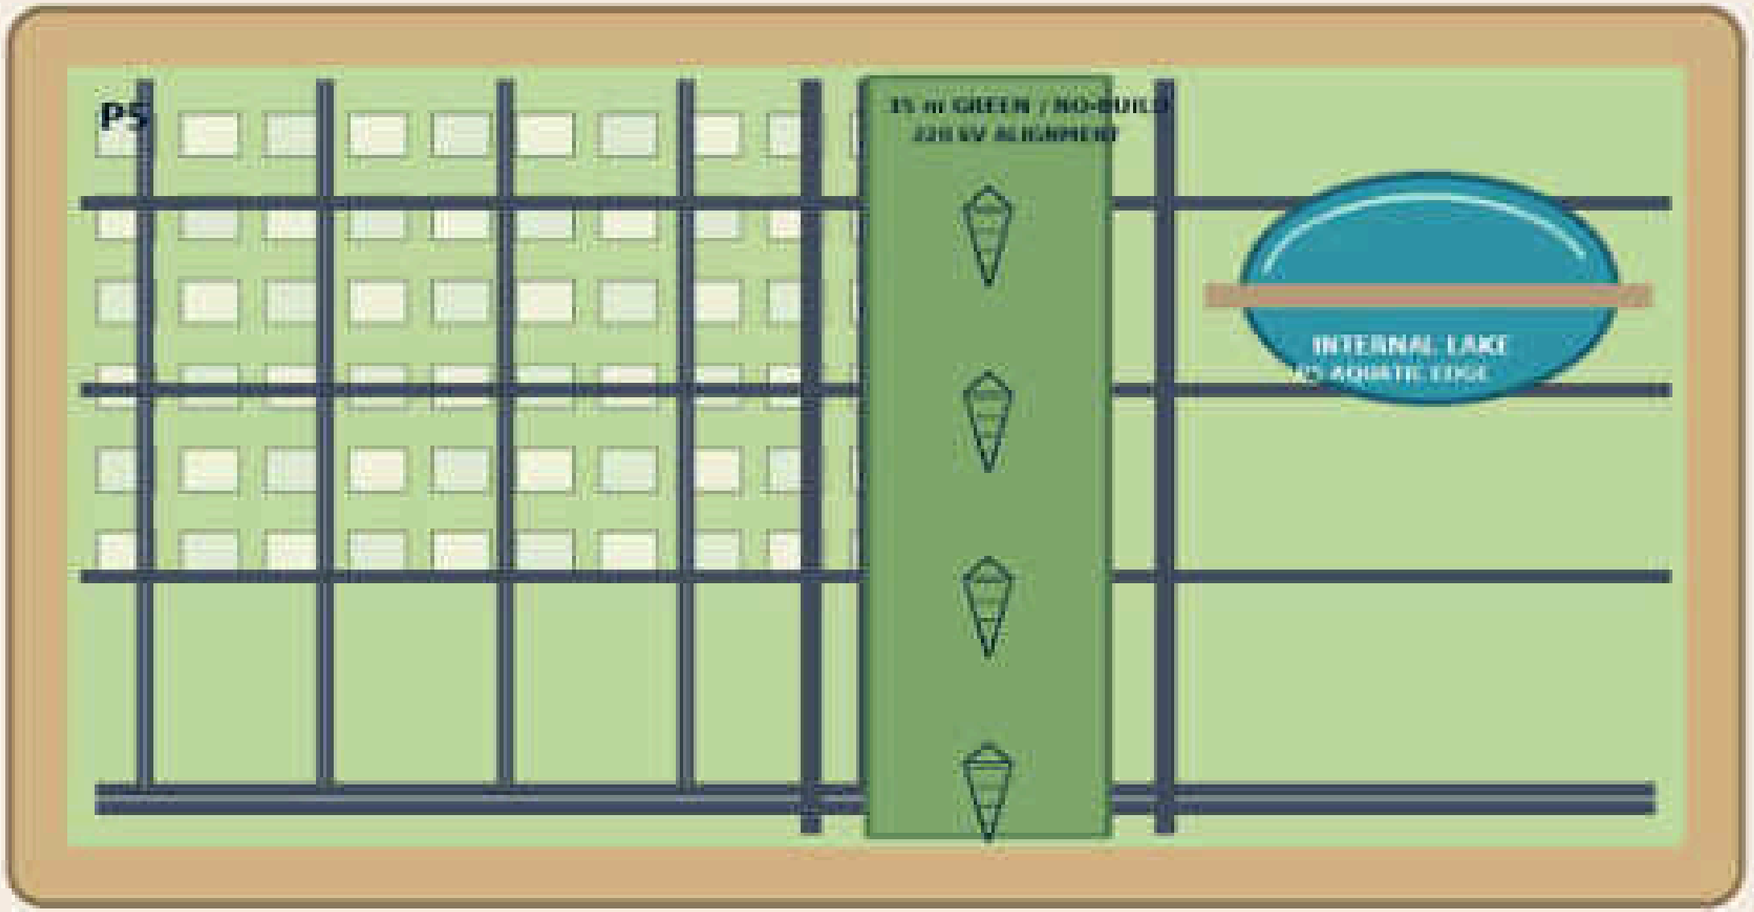

READ THE PLAN

01 Boundary

Dry outer context kept outside the estate

02 Roads

R01 boulevard, R02 collectors and R03 lo

03 HT band


35 m green/no-build corridor with 9 m fla

04 Aquatic

Internal P5 lake and club approach only.

ALL PHASES AND THE HT SPINE

A dry outer boundary, continuous green corridor and one internal aquatic precinct

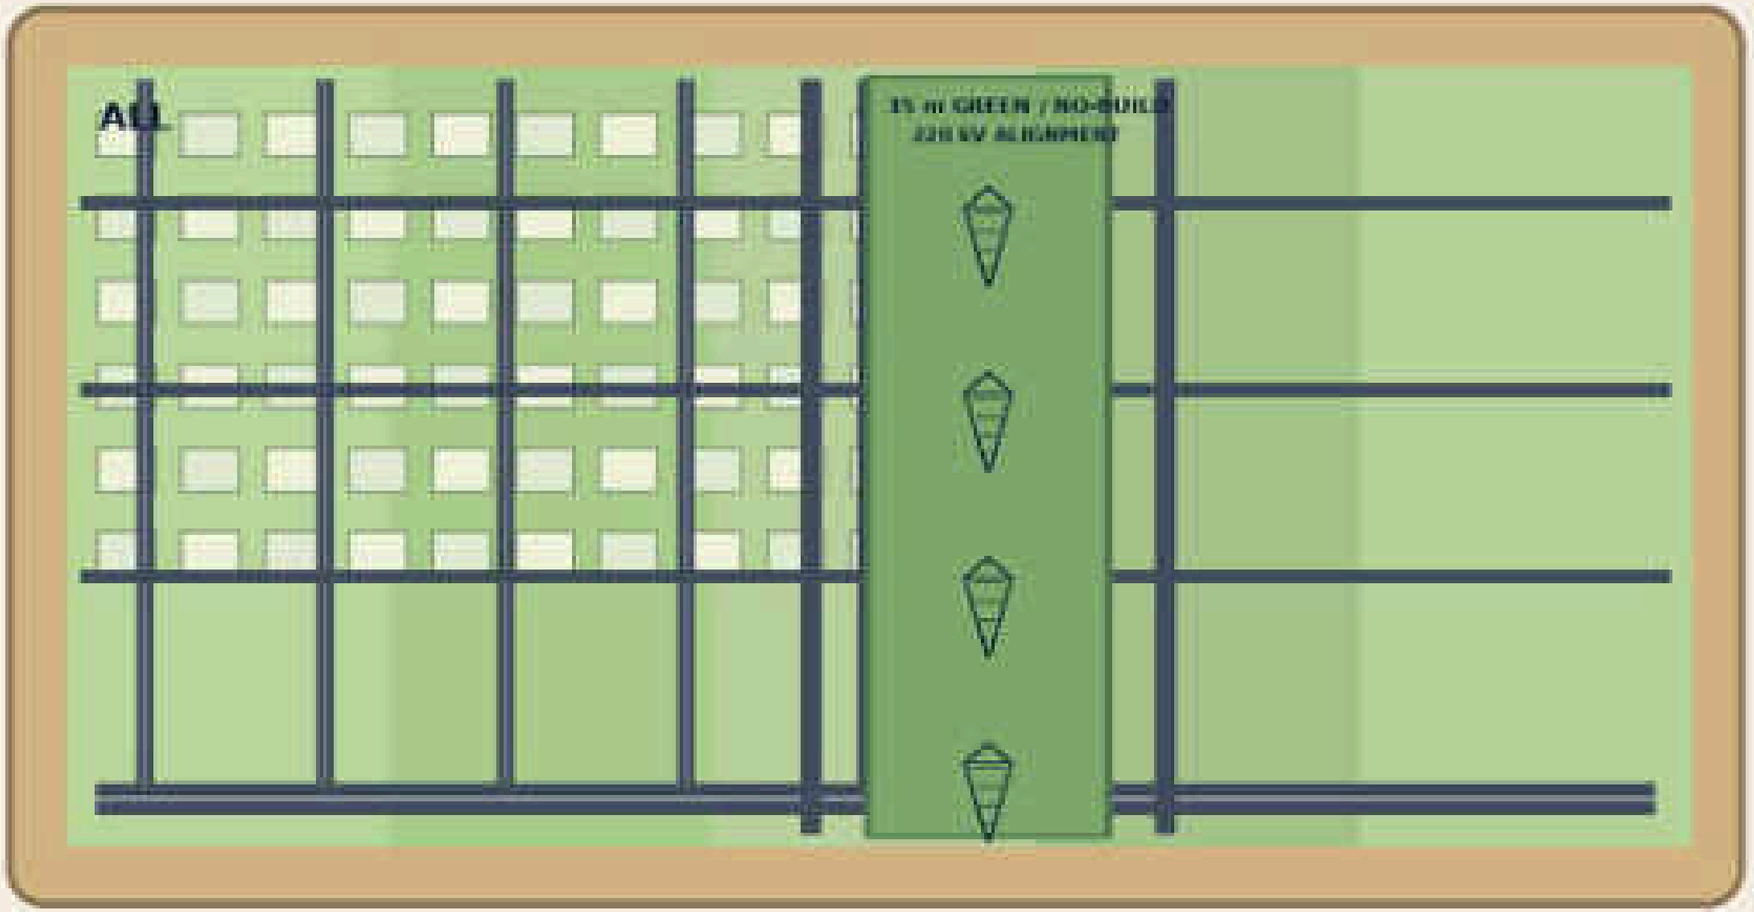

READ THE PLAN

01 Boundary

Dry outer context kept outside the estate

02 Roads

R01 boulevard, R02 collectors and R03 lo

03 HT band


35 m green/no-build corridor with 9 m fla

04 Parks

Green network is continuous through the


CORRIDOR SECTION - STANDARD

35 m green/no-build band with two 9 m flank roads.

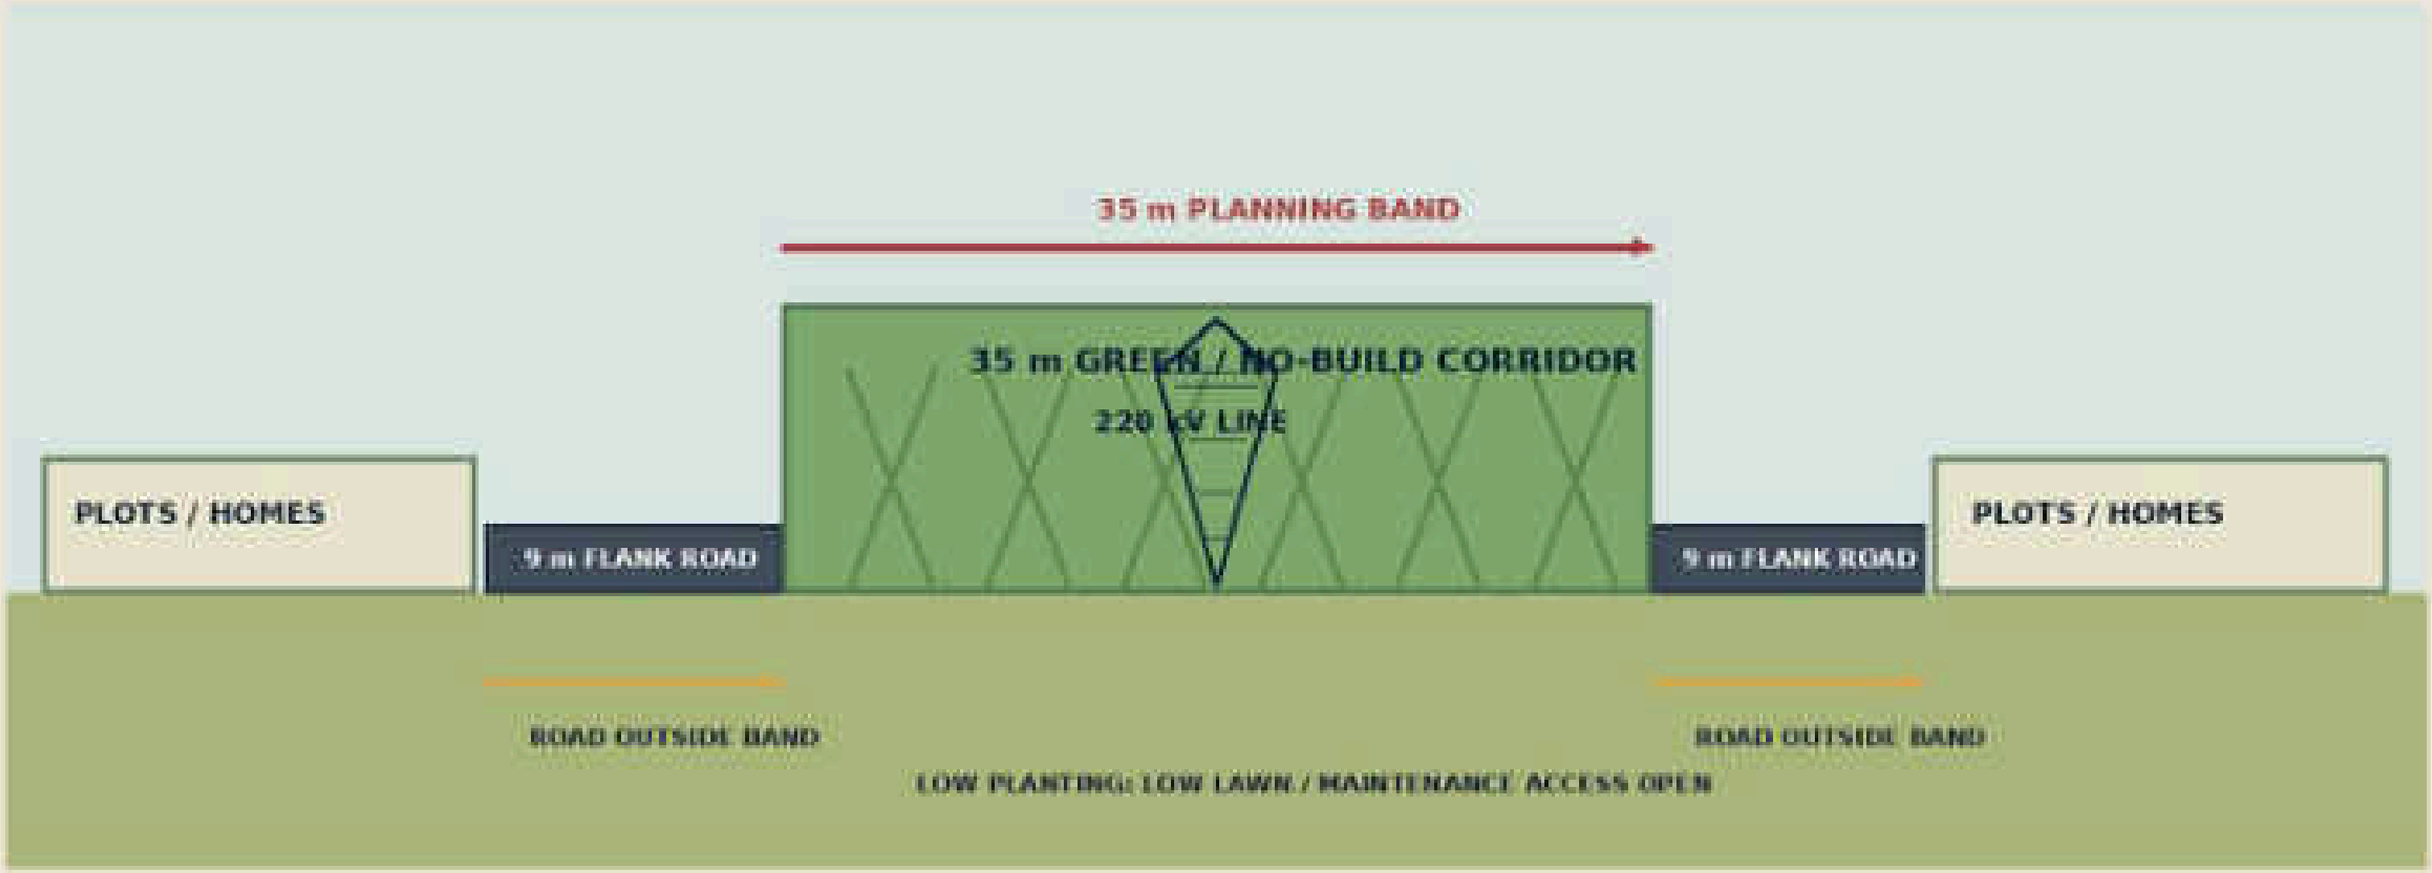


CORRIDOR SECTION - LOW PLANTING

Low lawn, native grasses and tower maintenance access.

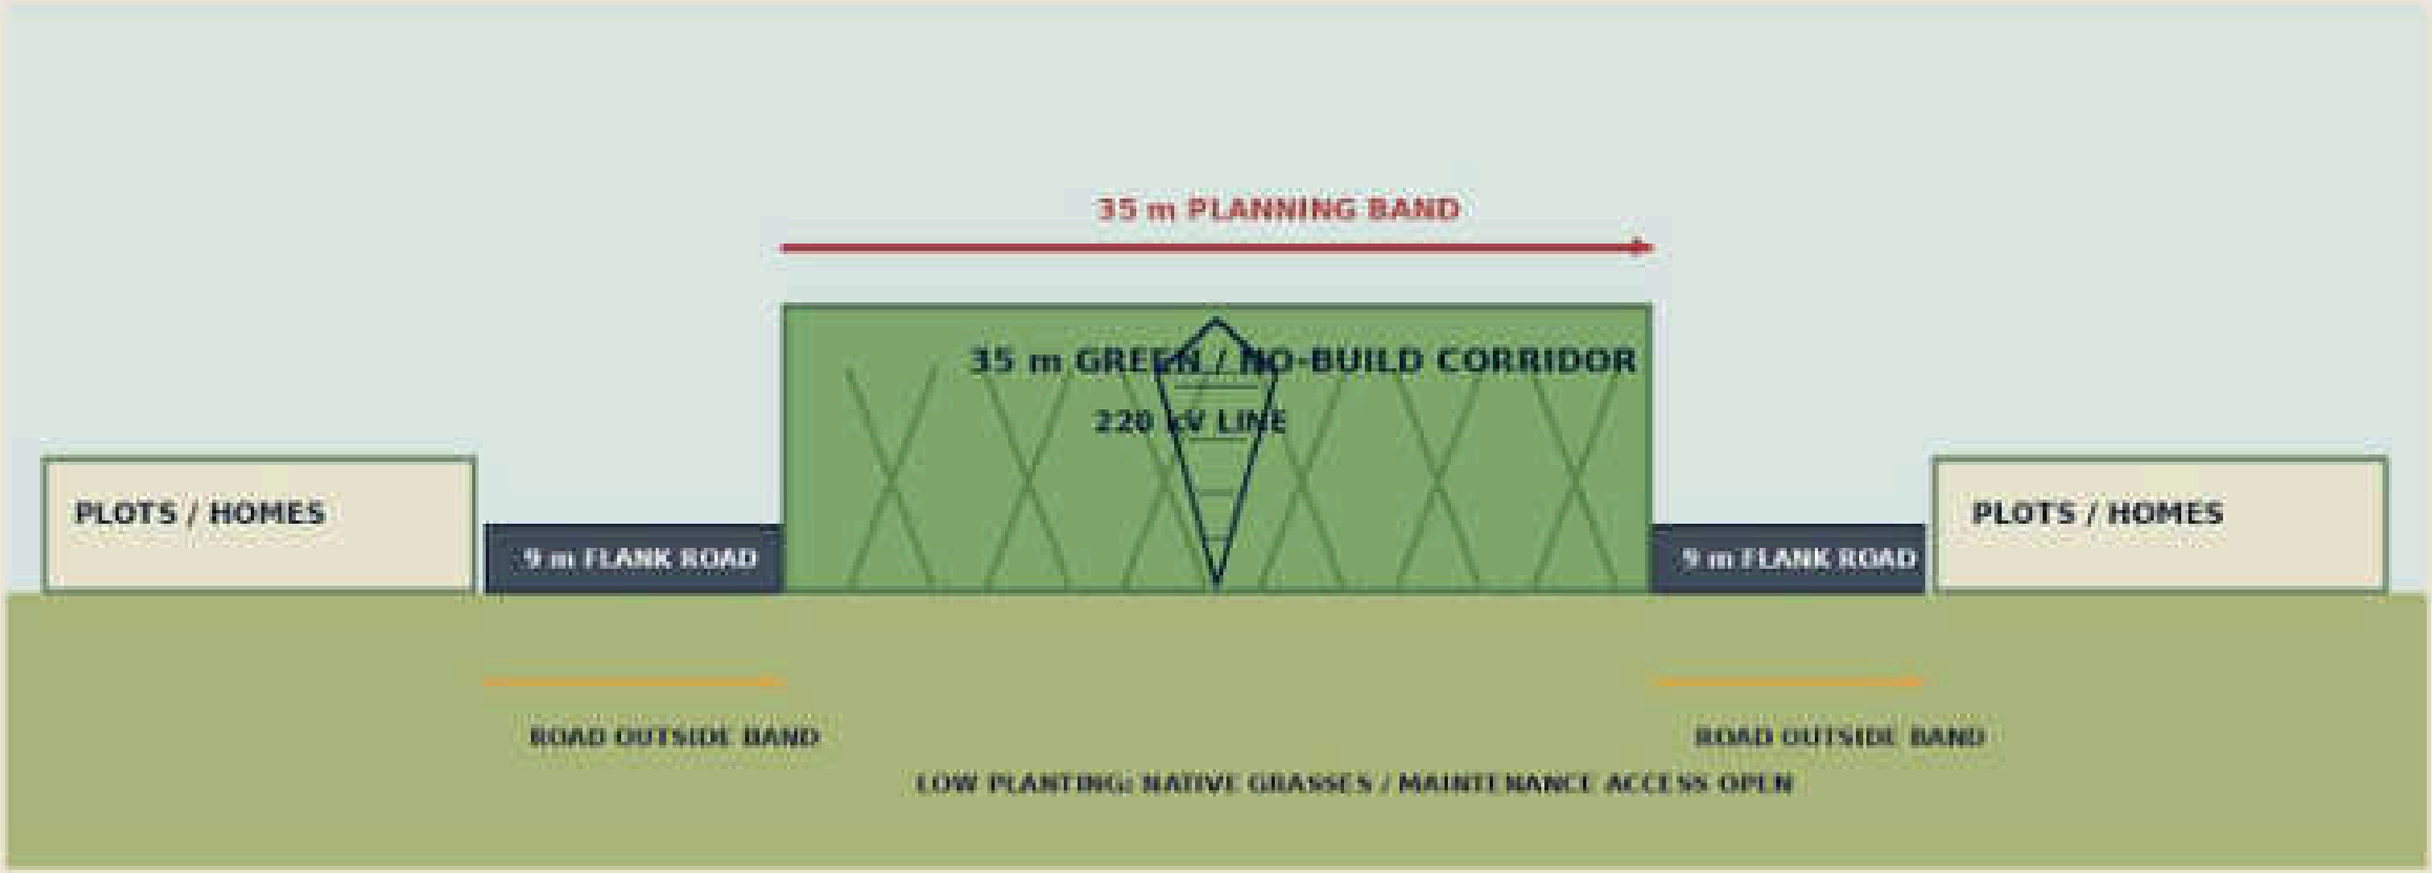


CORRIDOR SECTION - P2 FLANK ROADS

Both flank roads stay outside the transmission corridor.

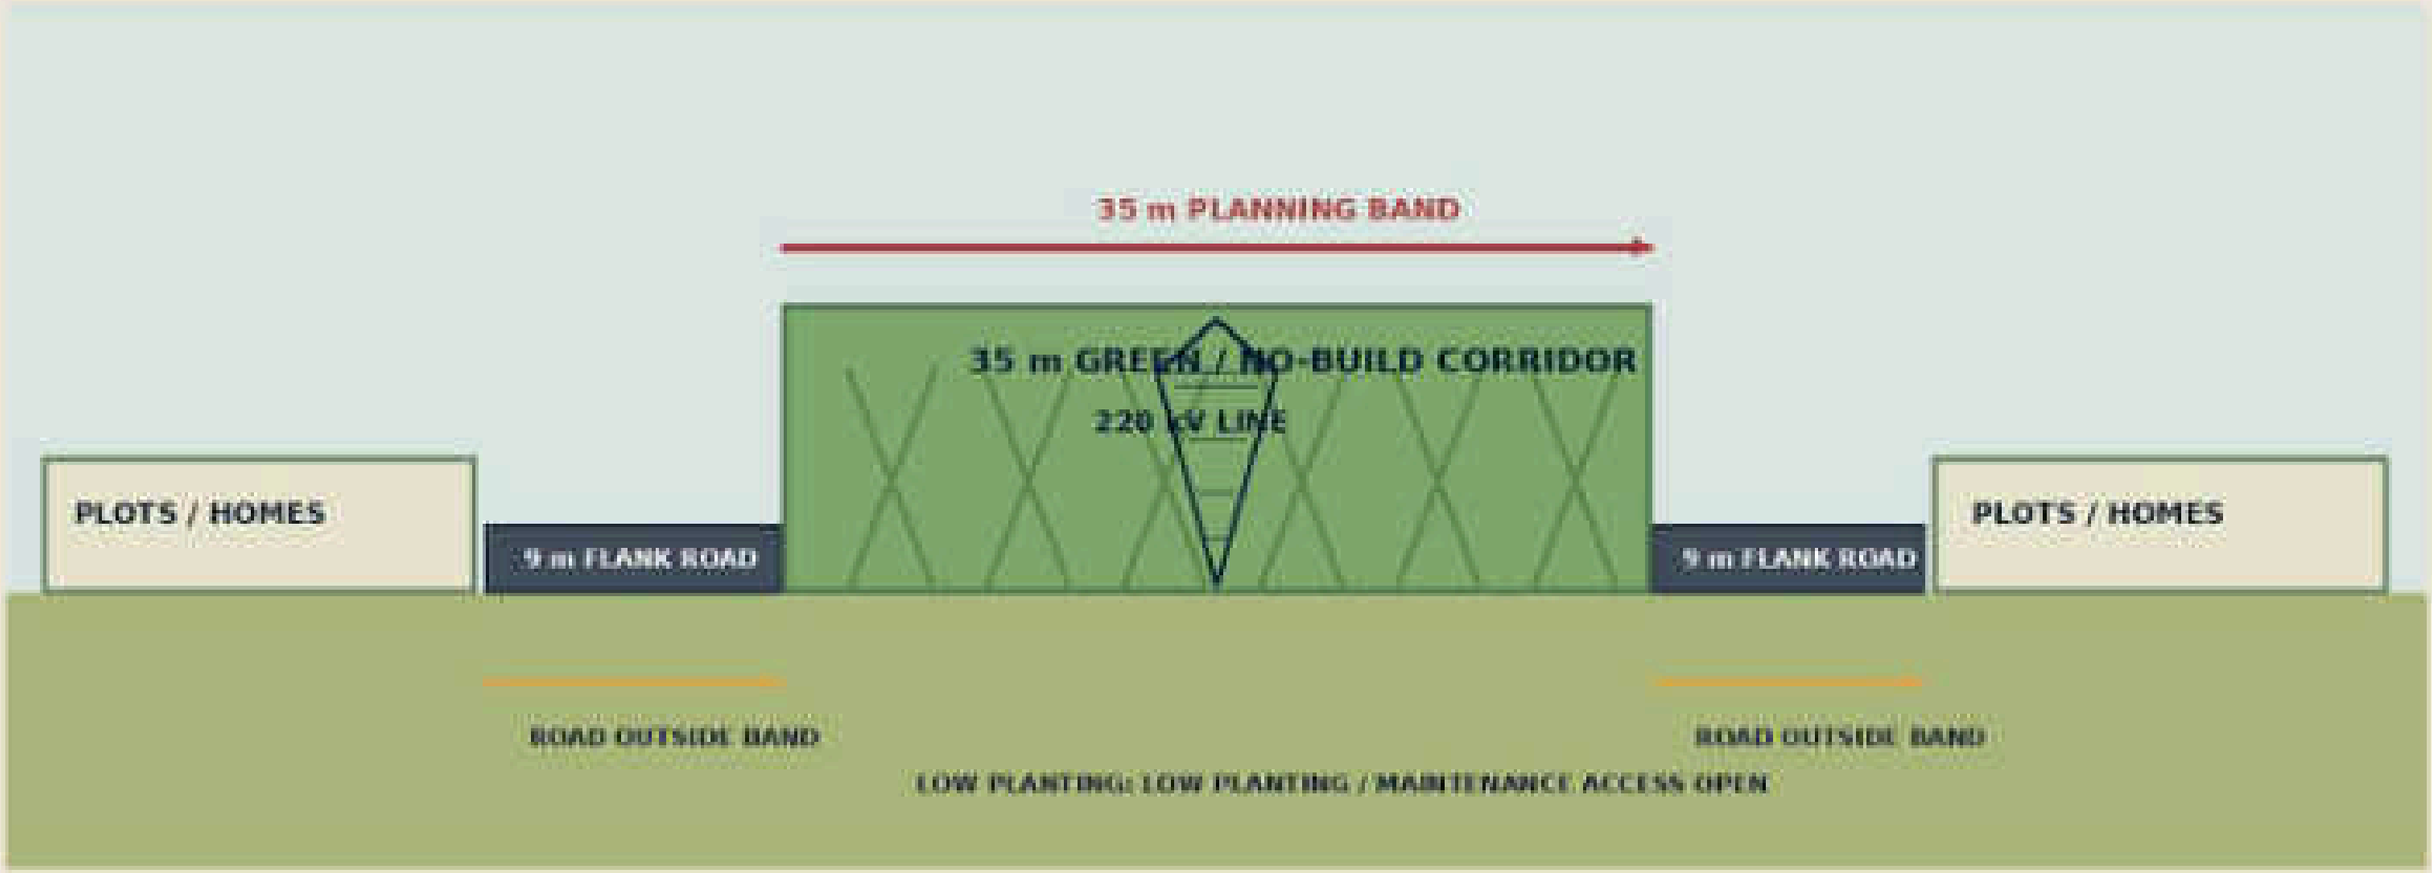


CORRIDOR SECTION - P3 CROSSING

Controlled road crossing node subject to line-owner review.

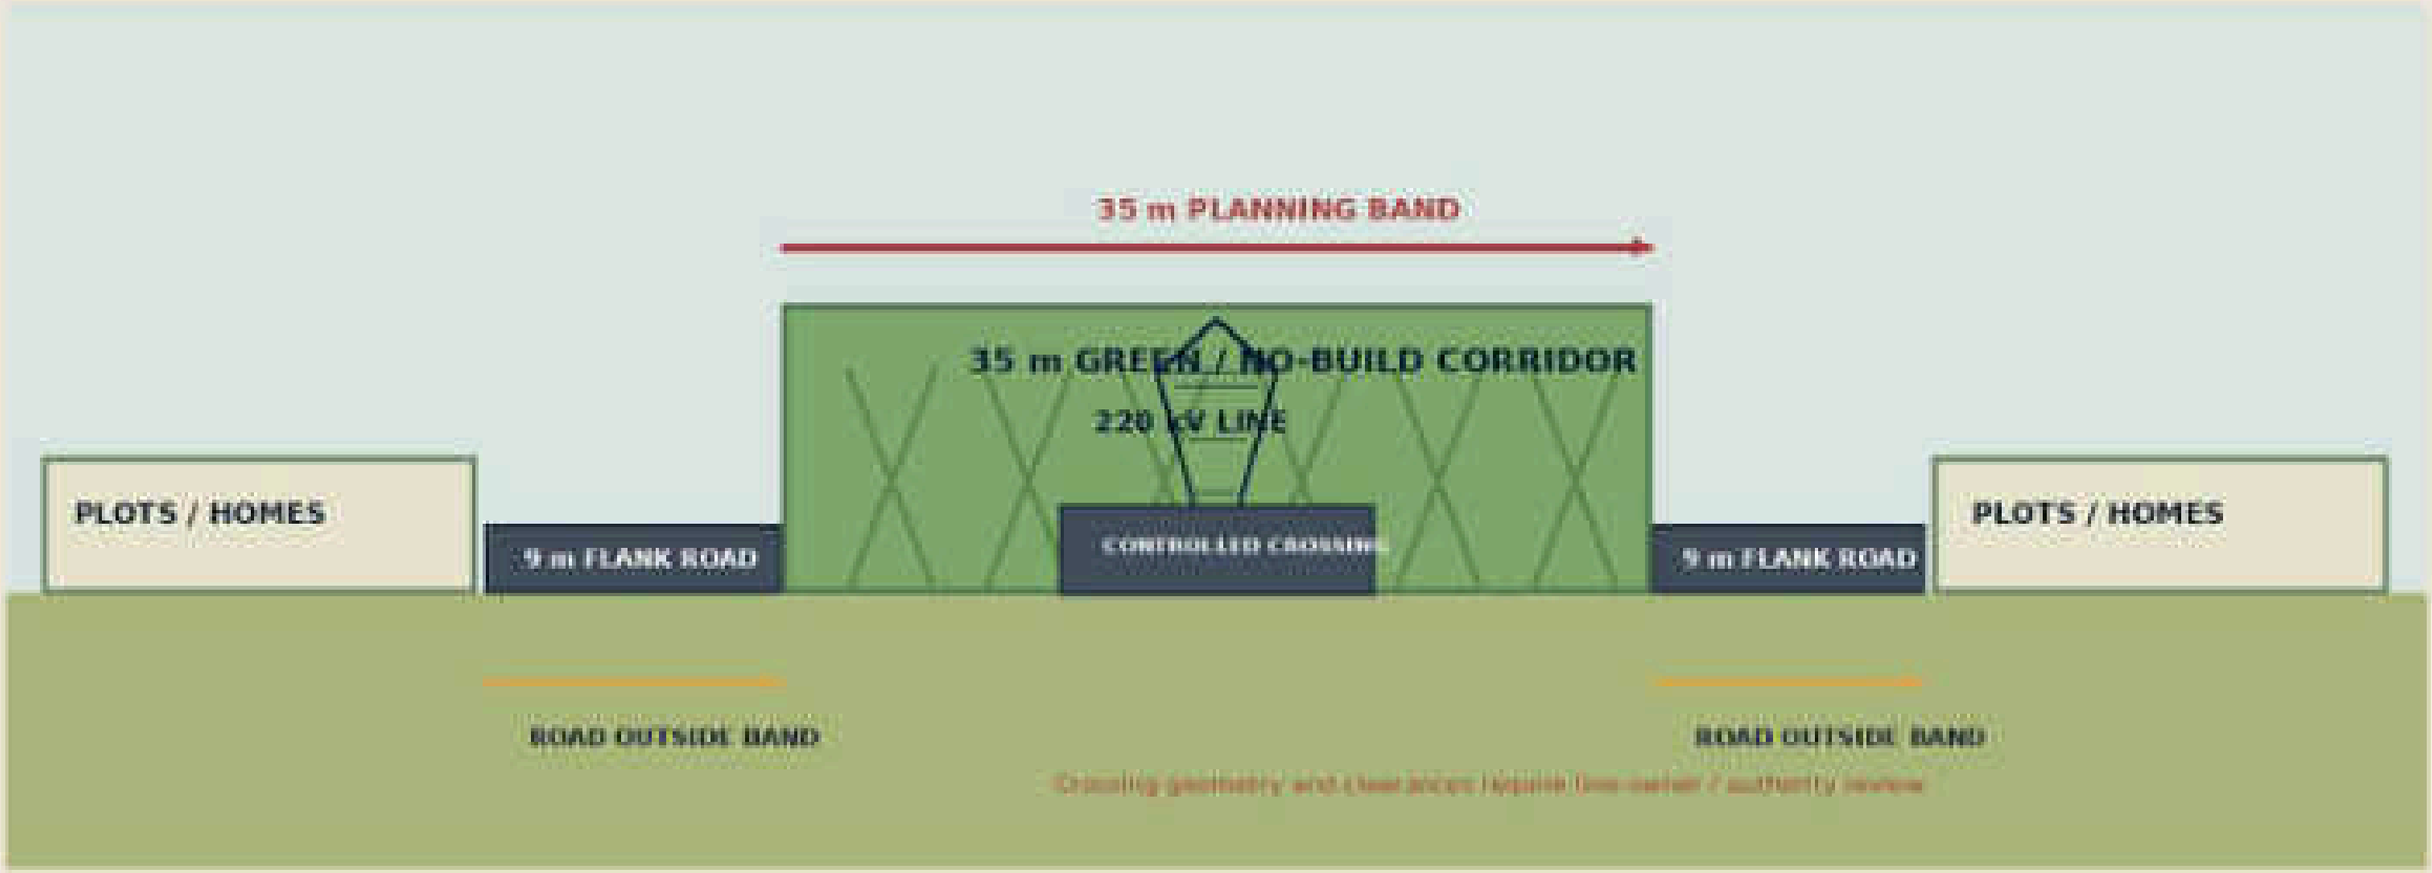


CORRIDOR SECTION - PARK EDGE

Park and sports uses remain beyond the road edge.

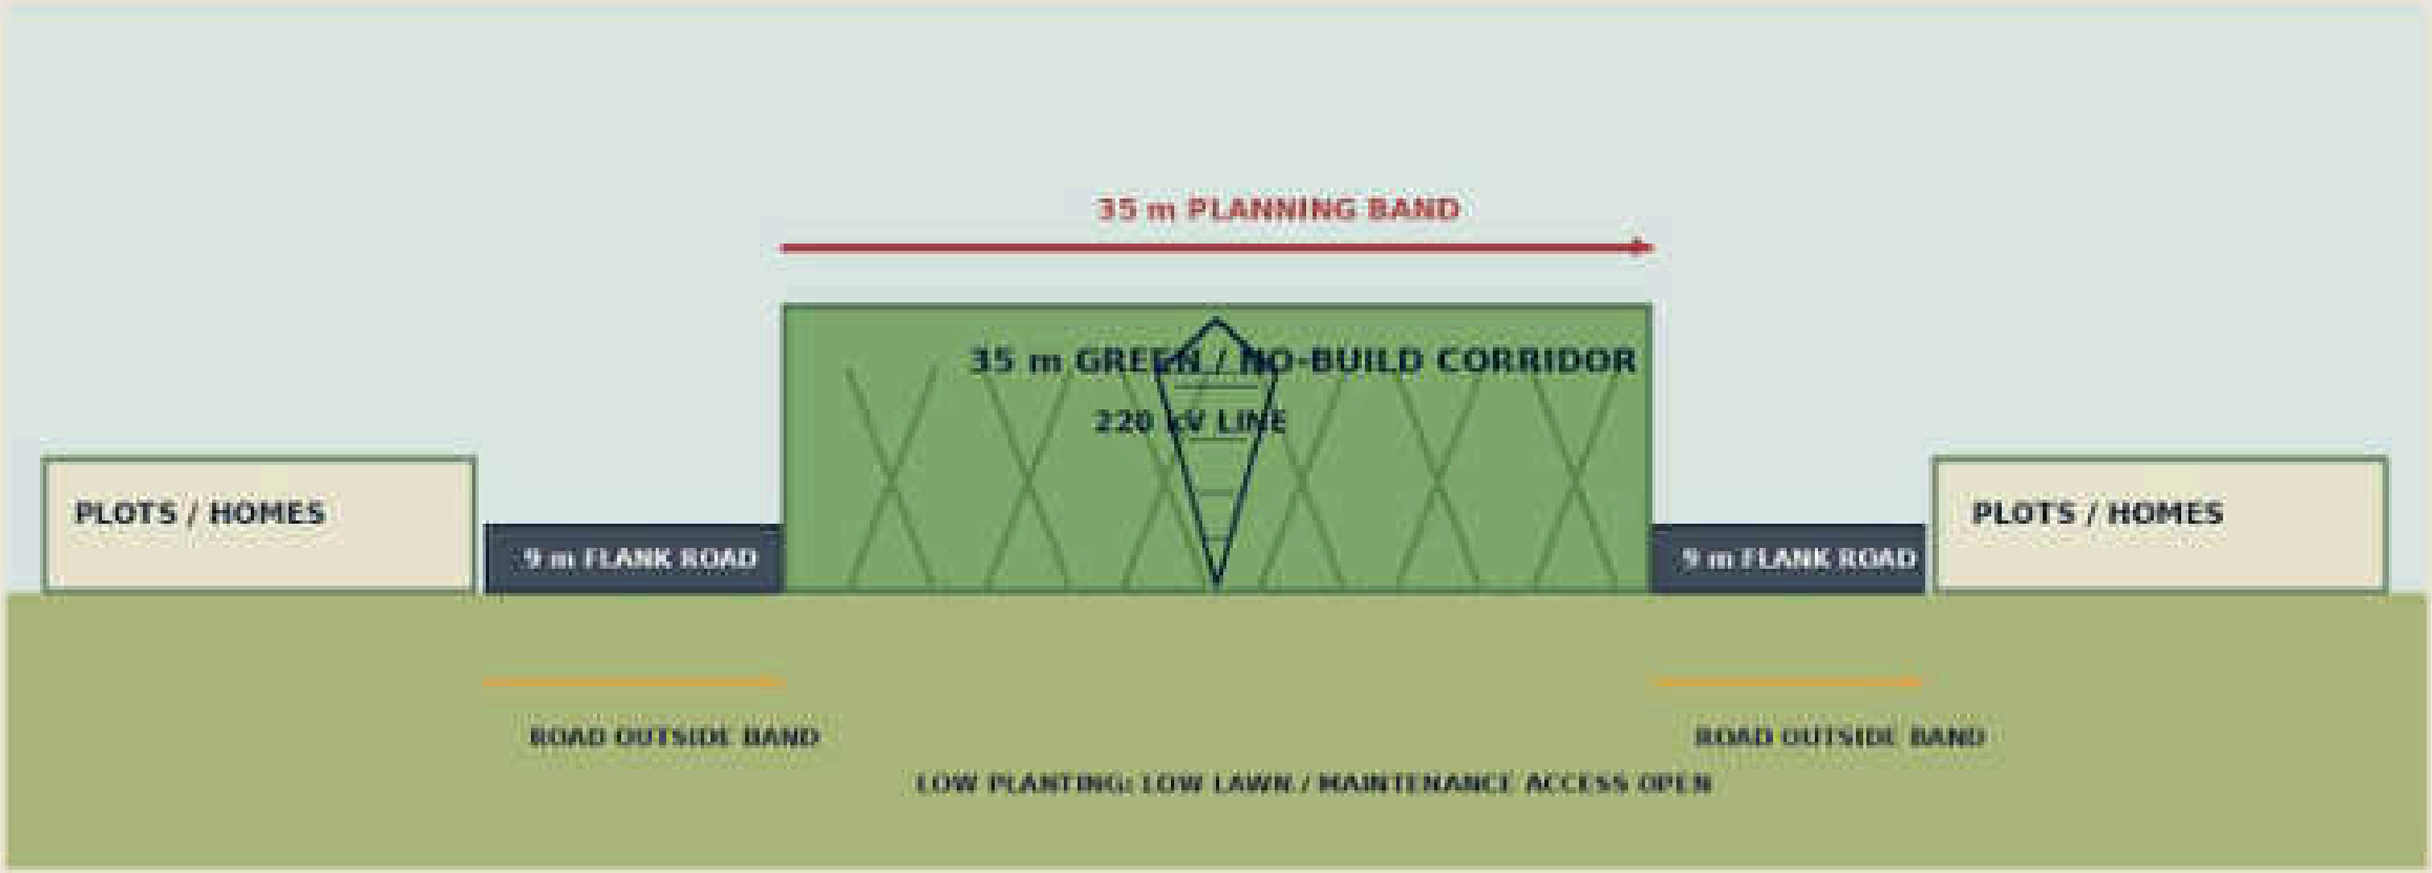


CORRIDOR SECTION - MAINTENANCE ACCESS

Keep tower bases and maintenance gates unobstructed

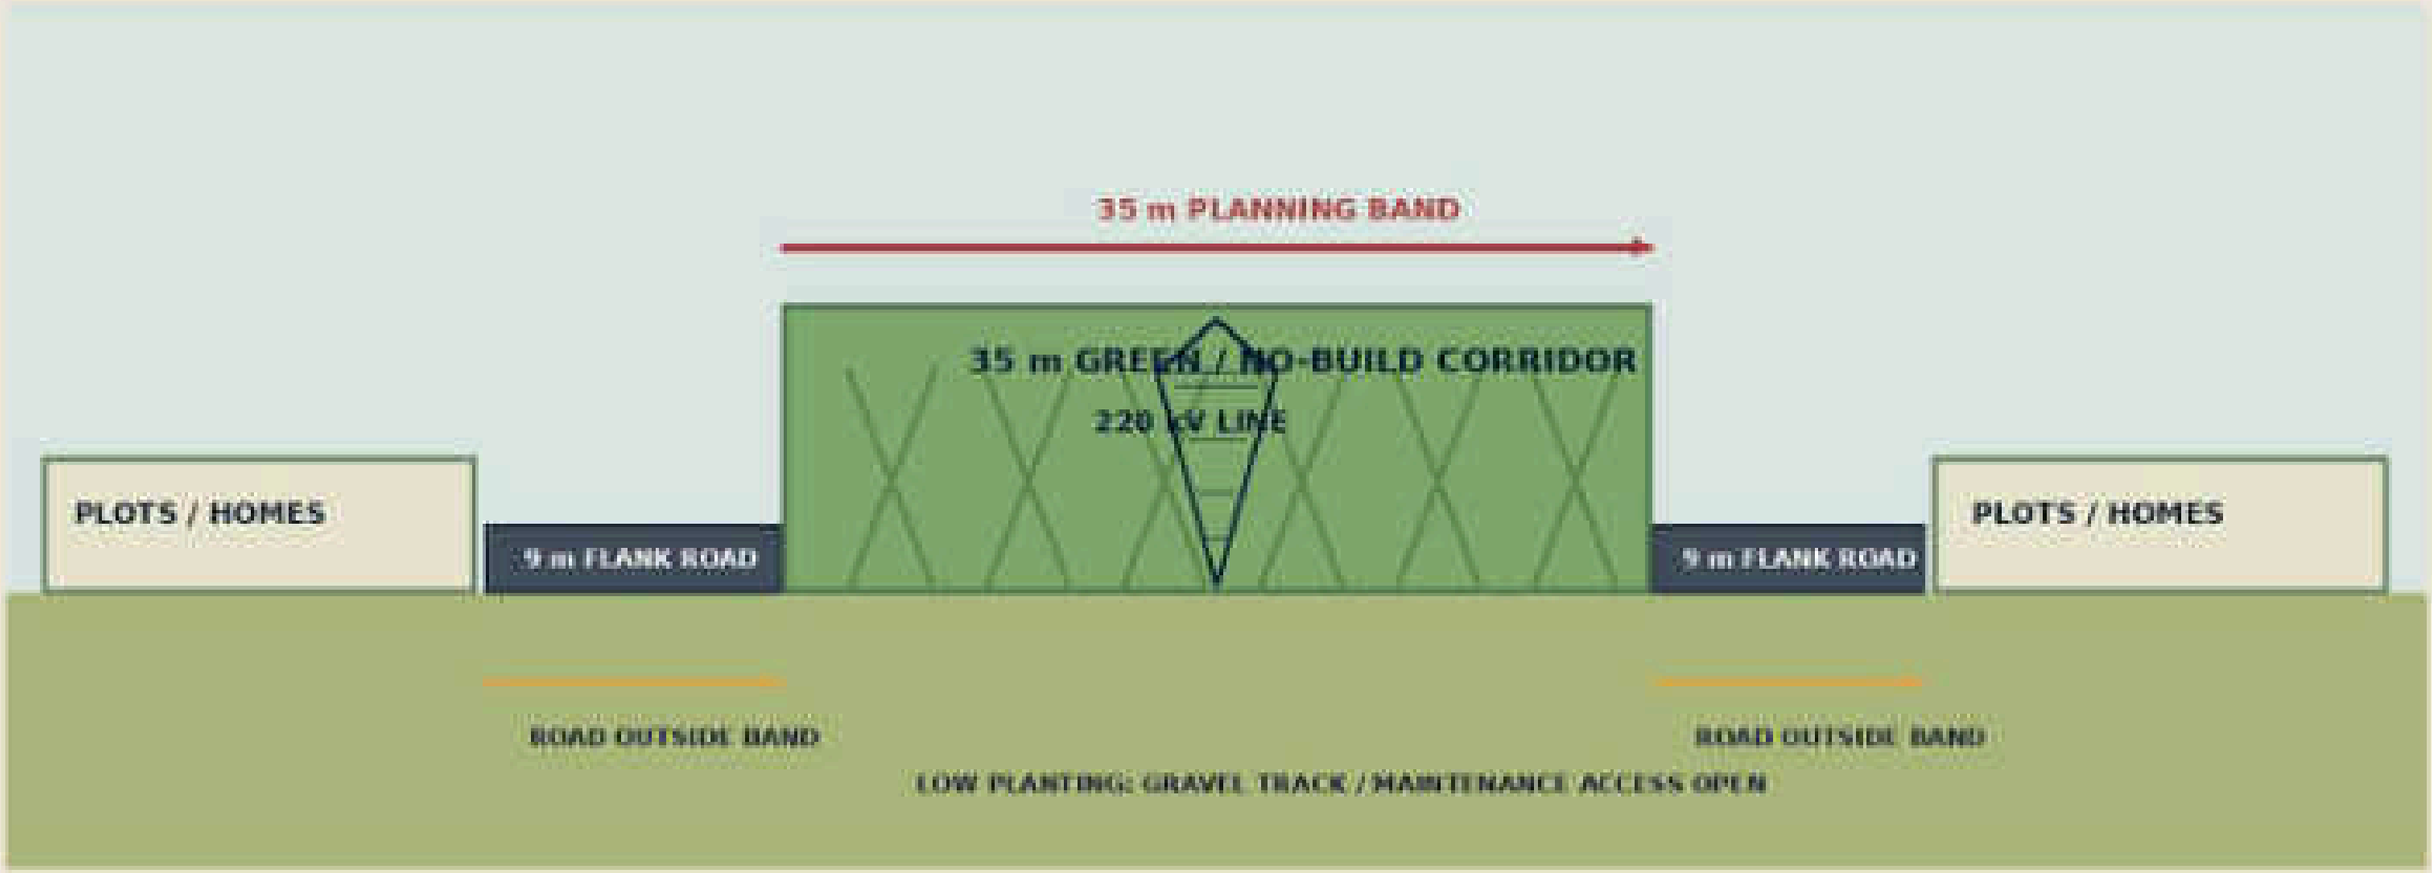


CORRIDOR SECTION - RESIDENTIAL EDGE

Plots begin beyond the flank roads and safety band.

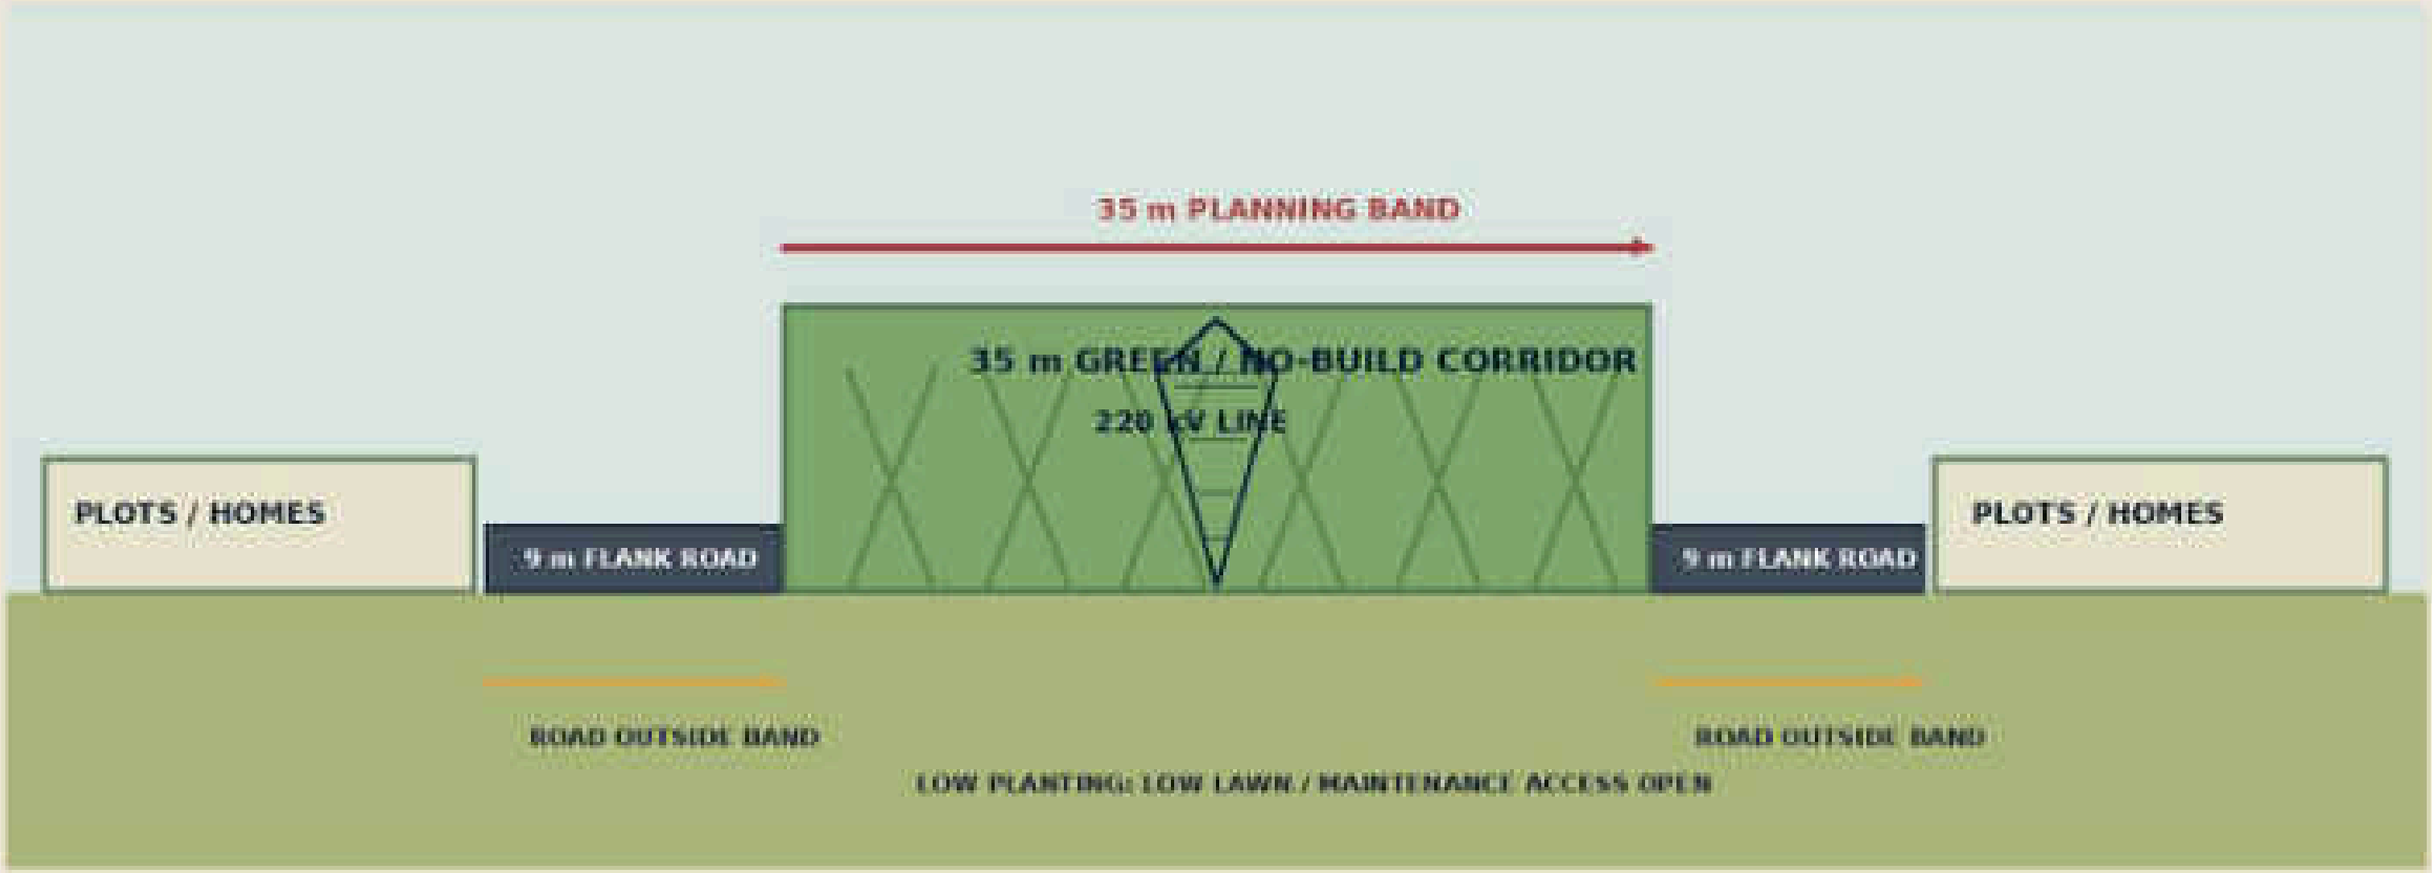


CORRIDOR SECTION - ROAD DRAINAGE

Dry planted swale and surface drainage outside the band.

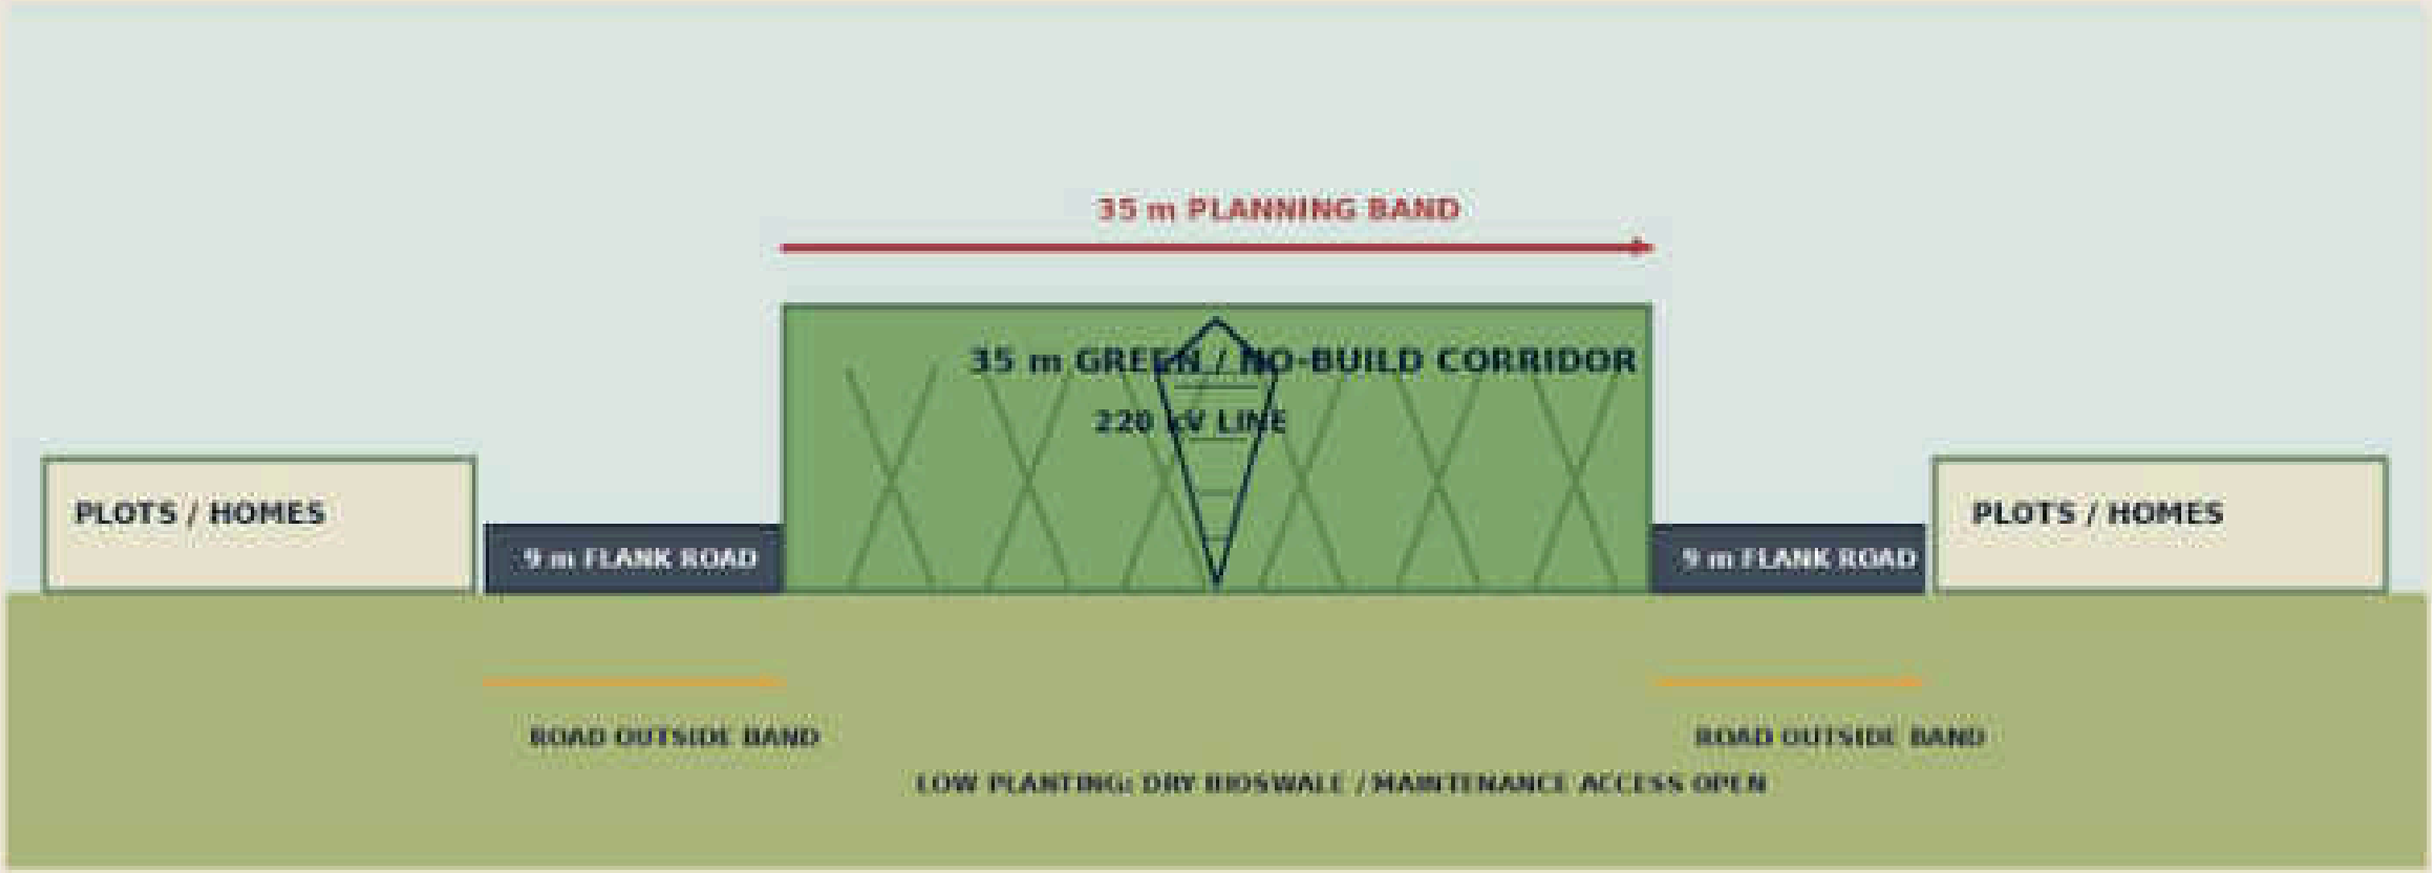


CORRIDOR SECTION - CROSSING VISIBILITY

Maintain sightlines at a short, controlled crossing.

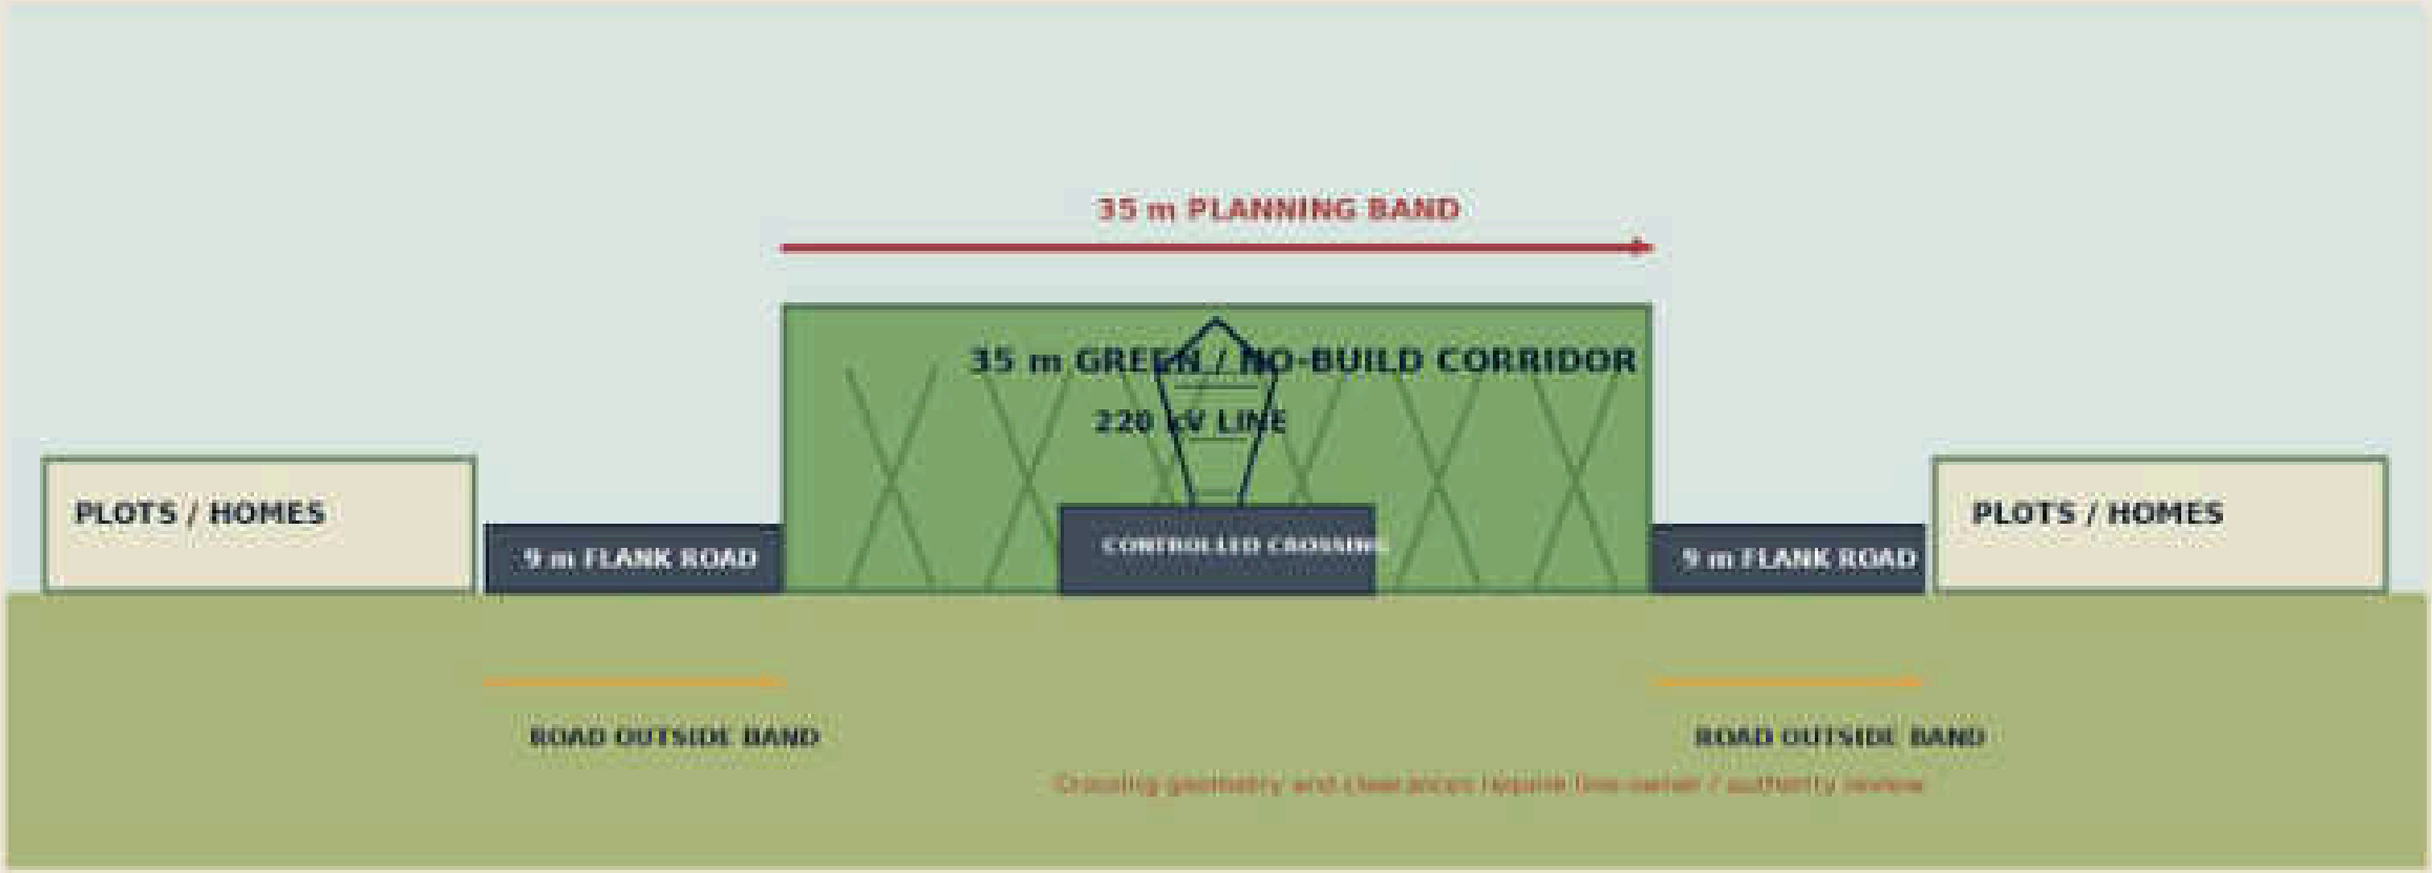


CORRIDOR SECTION - RELEASE PLATE

Planning reference for technical coordination and approval.

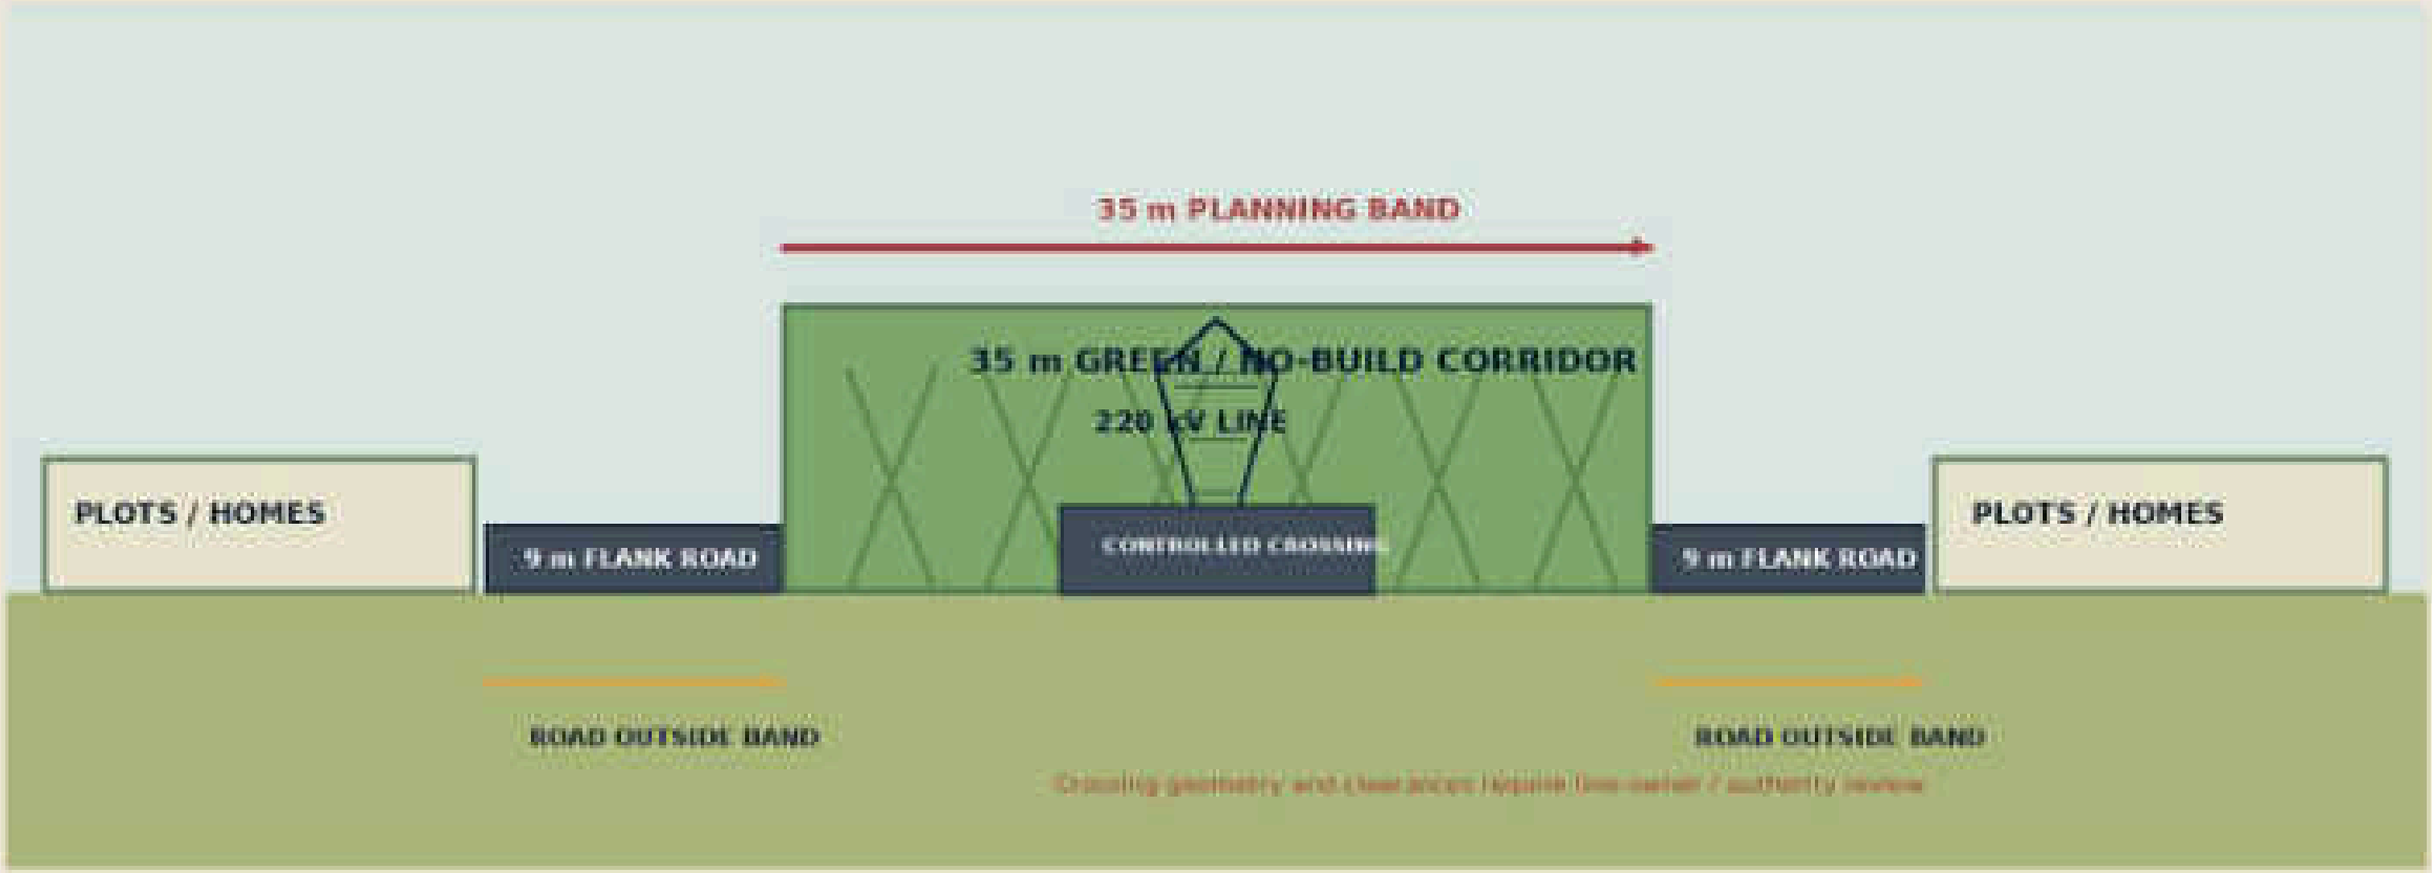

R05 ROUNDABOUT - P1 ENTRY

A planted circle separates the boulevard from local streets.

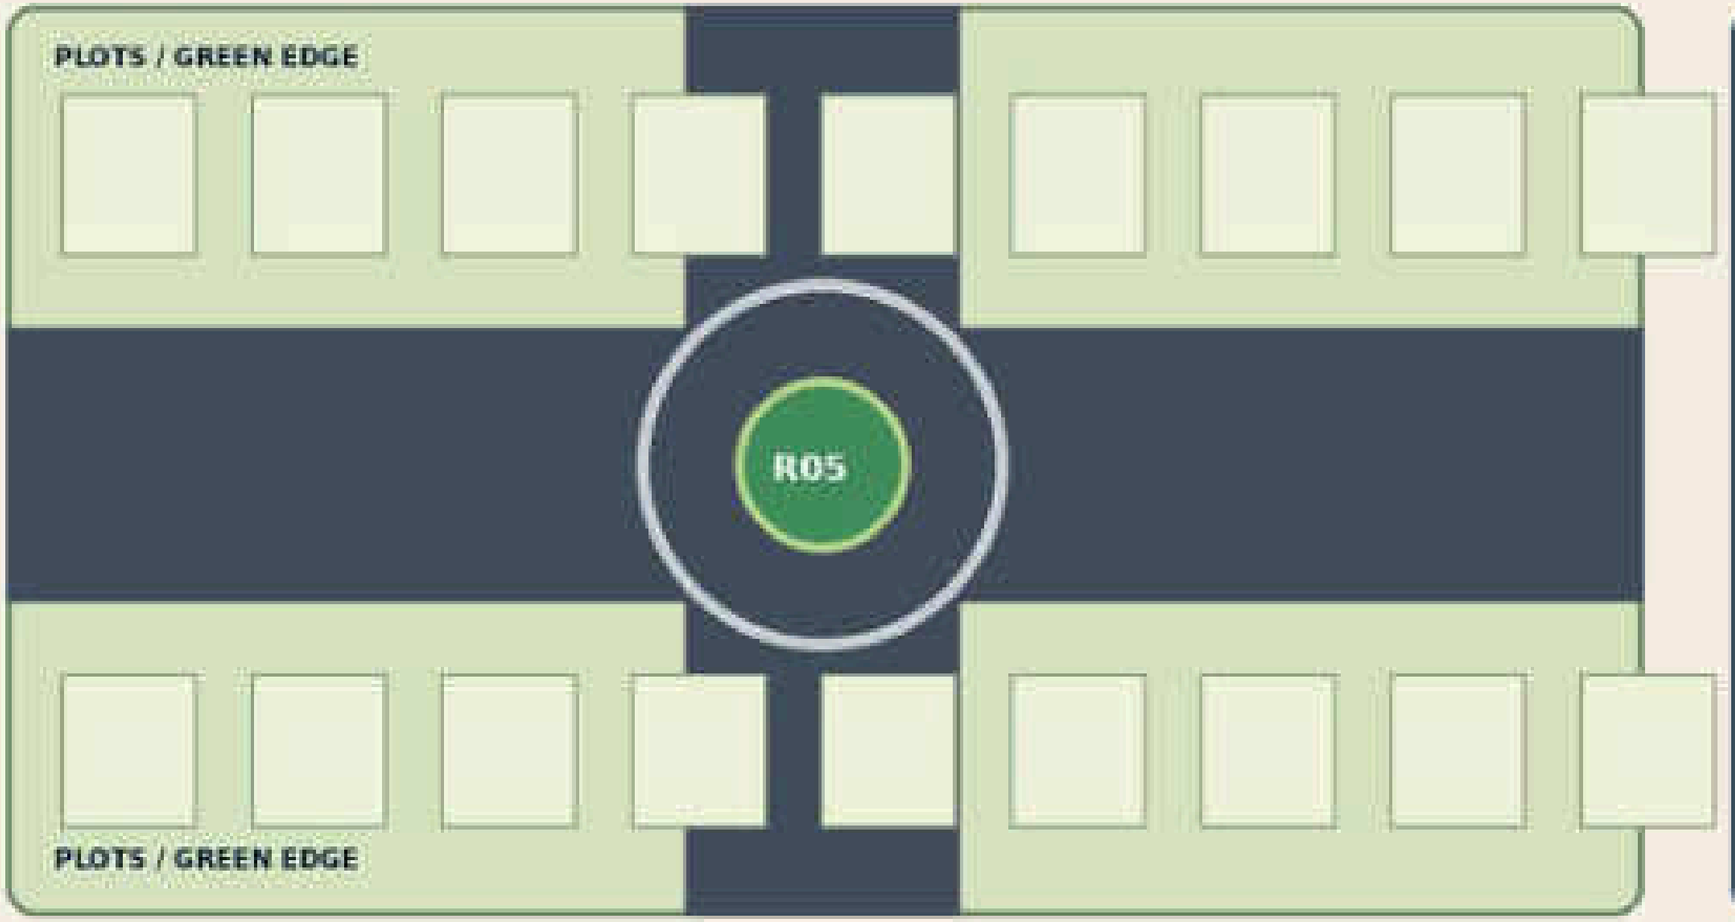


DESIGN INTENT

- Clear sight triangles
- Safe pedestrian crossing
- Emergency turning path
- Native shade and lighting
- No water feature in road band

[illegible]

R02 / R03 T-JUNCTION - P1

Traffic-calmed T-junction with clear sight triangles

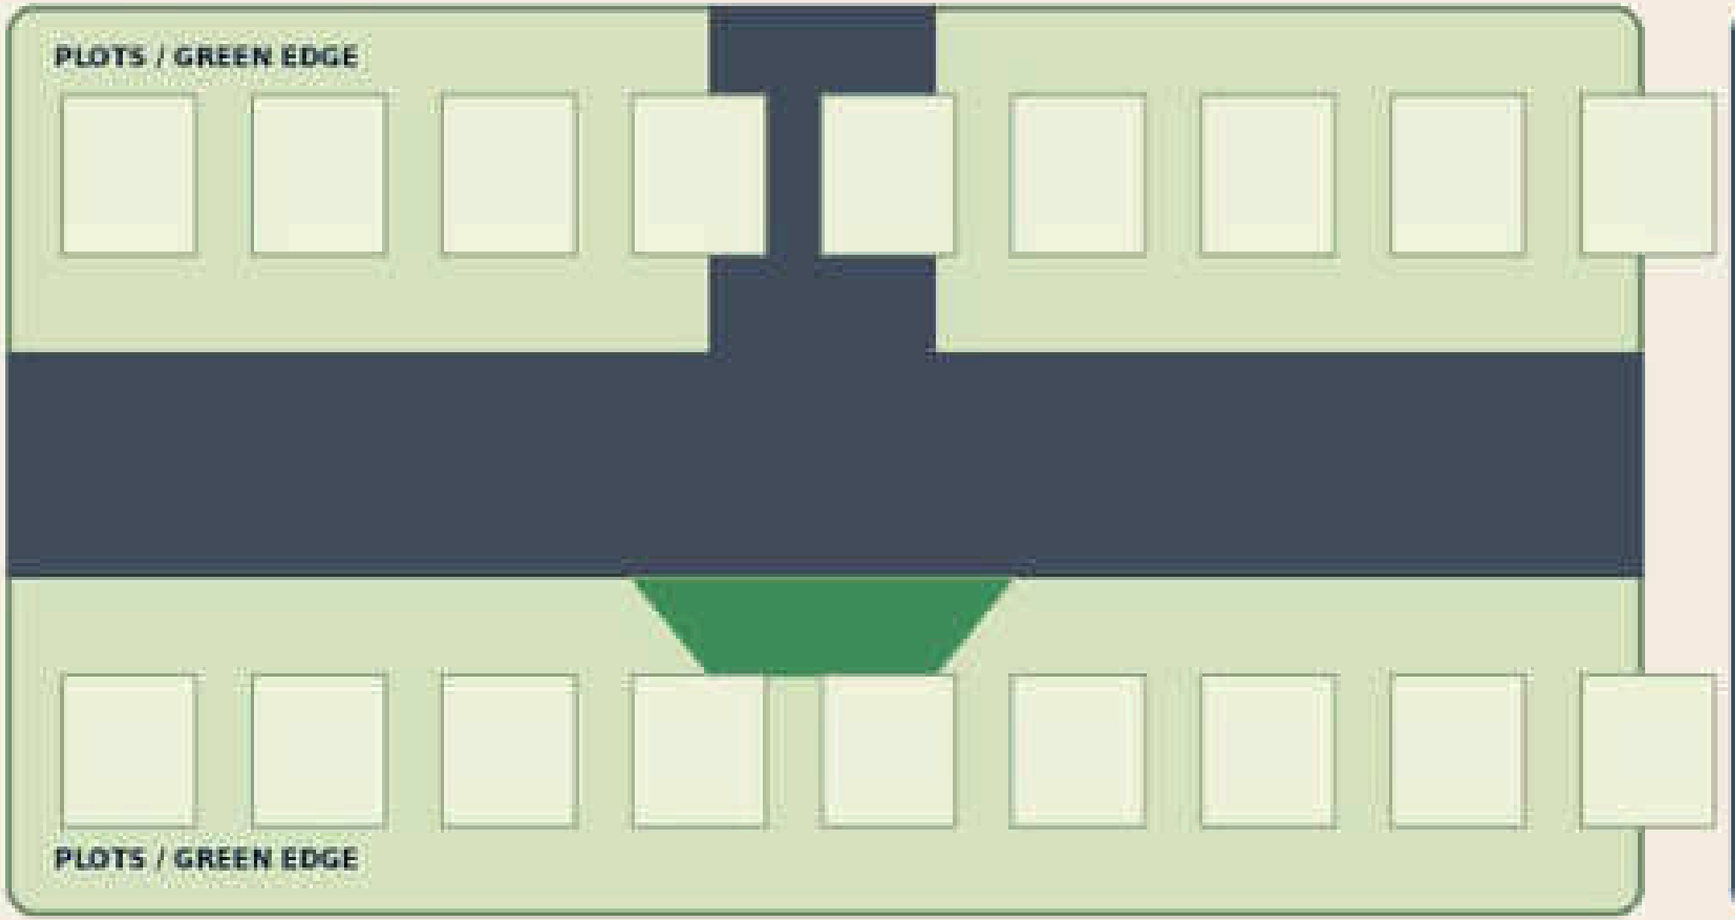


DESIGN INTENT

- Clear sight triangles
- Safe pedestrian crossing
- Emergency turning path
- Native shade and lighting
- No water feature in road band

PEDESTRIAN CROSSING - P1

A safe crossing connects the park and plot edge.

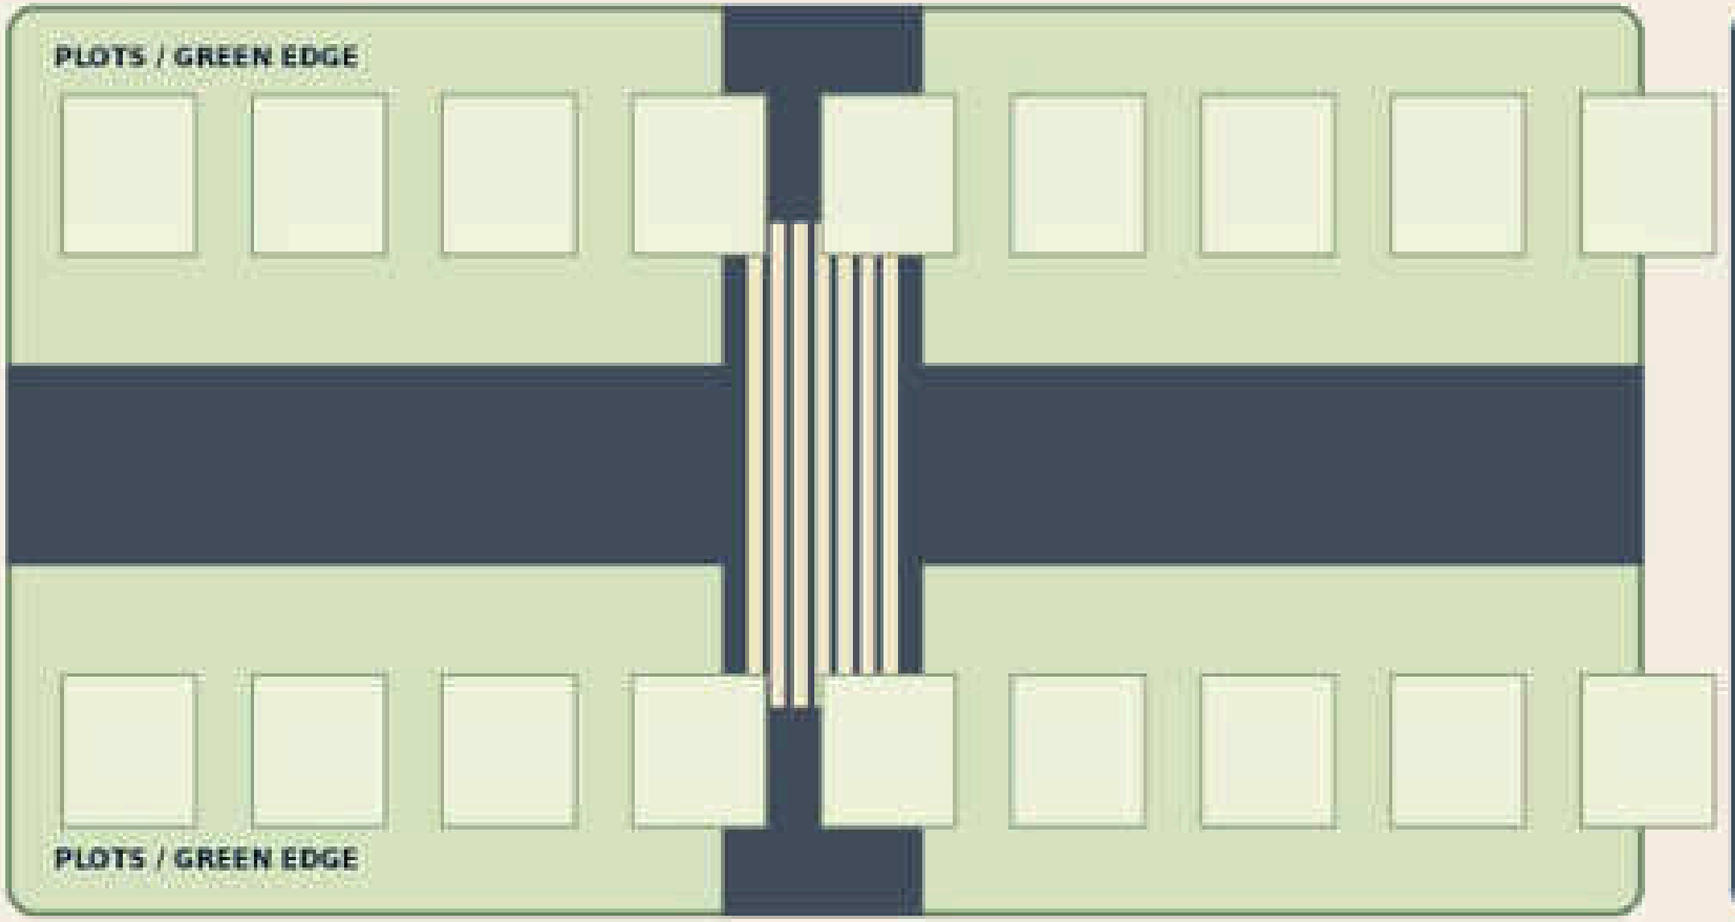


DESIGN INTENT

- Clear sight triangles
- Safe pedestrian crossing
- Emergency turning path
- Native shade and lighting
- No water feature in road band

MAIN GATE - P1

Gate drop-off, estate office and visitor arrival sequence

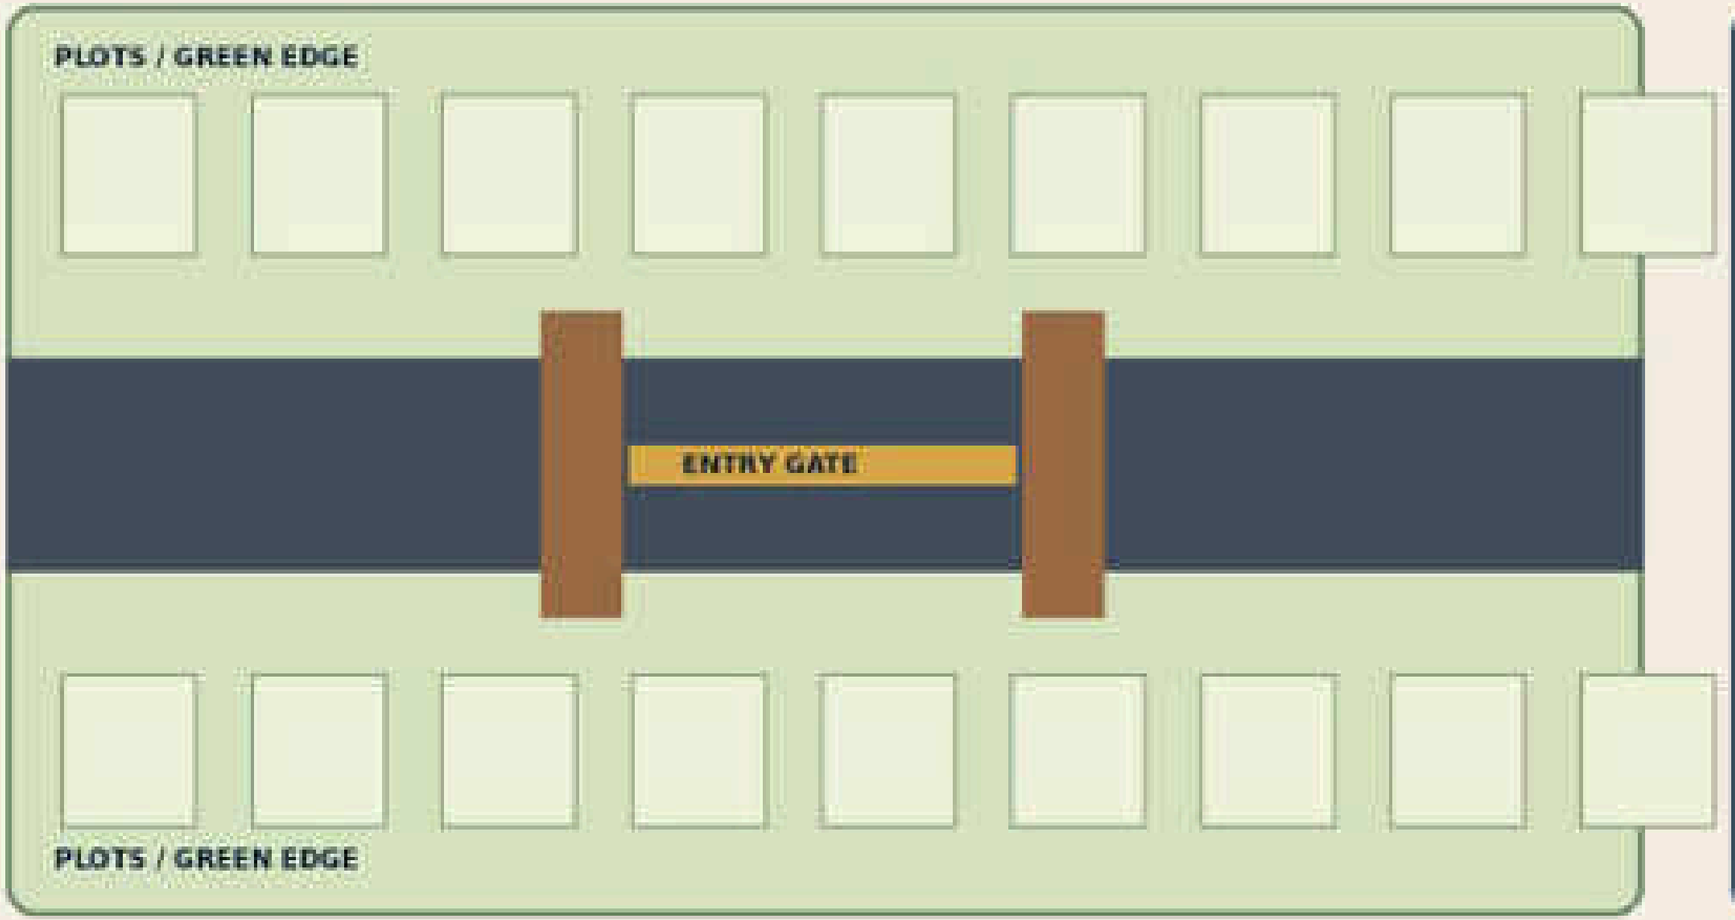


DESIGN INTENT

- Clear sight triangles
- Safe pedestrian crossing
- Emergency turning path
- Native shade and lighting
- No water feature in road band

R02 ROUNDABOUT - P2

Junction control beside the HT green spine.

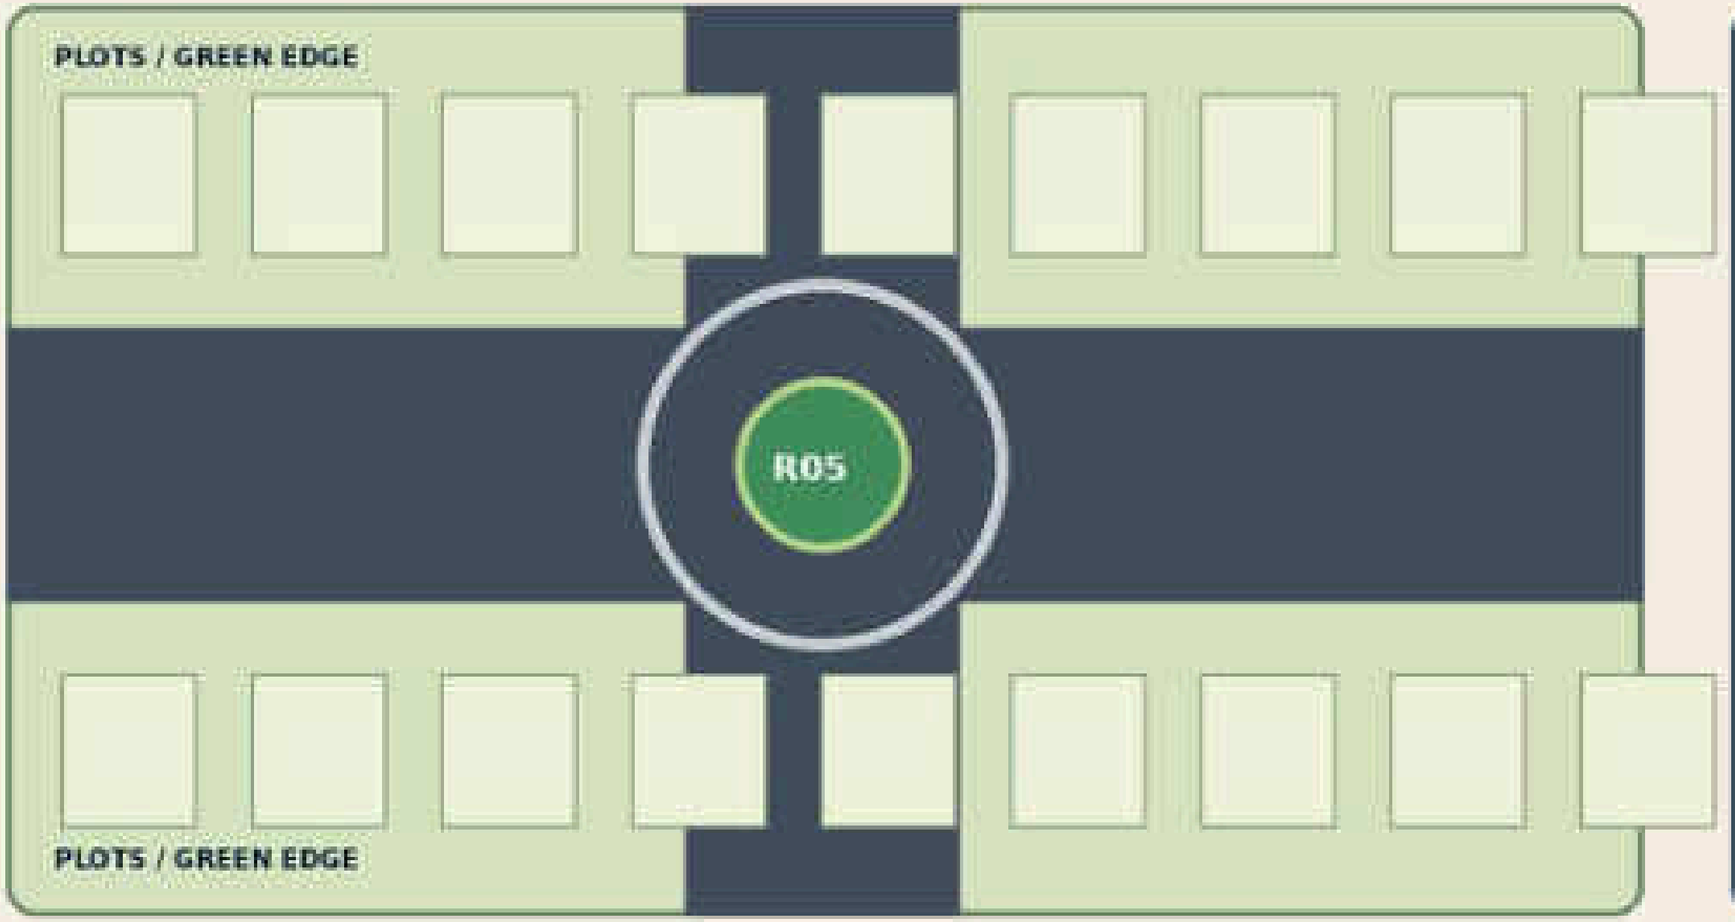


DESIGN INTENT

- Clear sight triangles
- Safe pedestrian crossing
- Emergency turning path
- Native shade and lighting
- No water feature in road band

FLANK-ROAD CROSSING - P2

Short controlled crossing outside the no-build band.

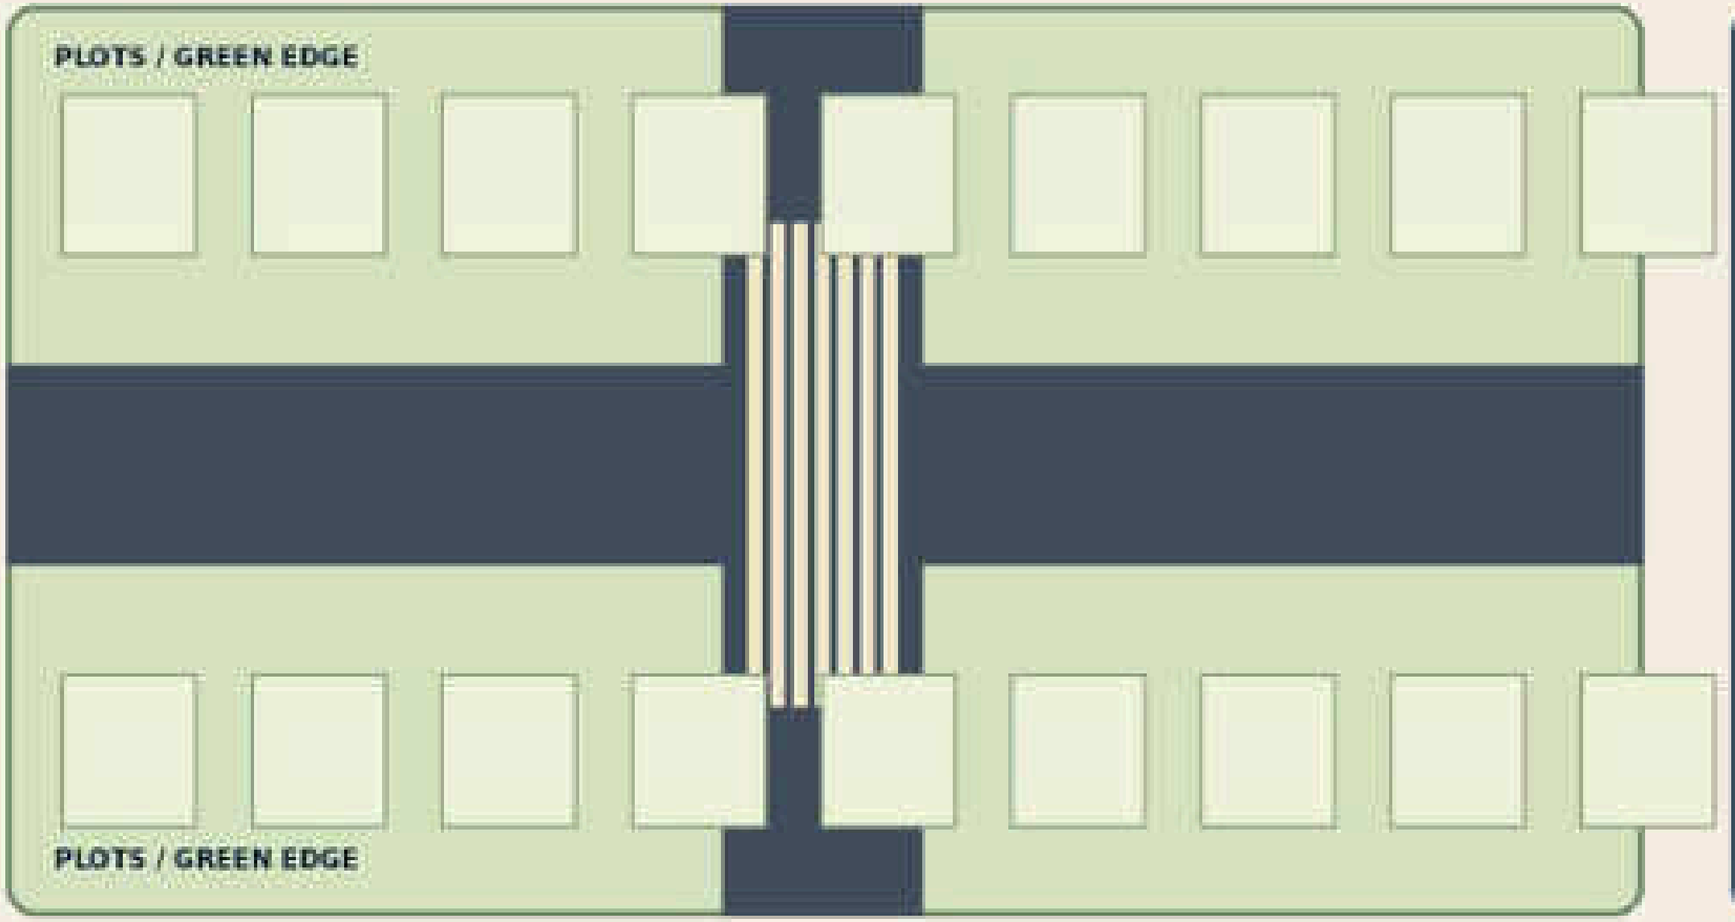


DESIGN INTENT

- Clear sight triangles
- Safe pedestrian crossing
- Emergency turning path
- Native shade and lighting
- No water feature in road band

SERVICE TURN - P3

Emergency and service turning without blocking the corridor.

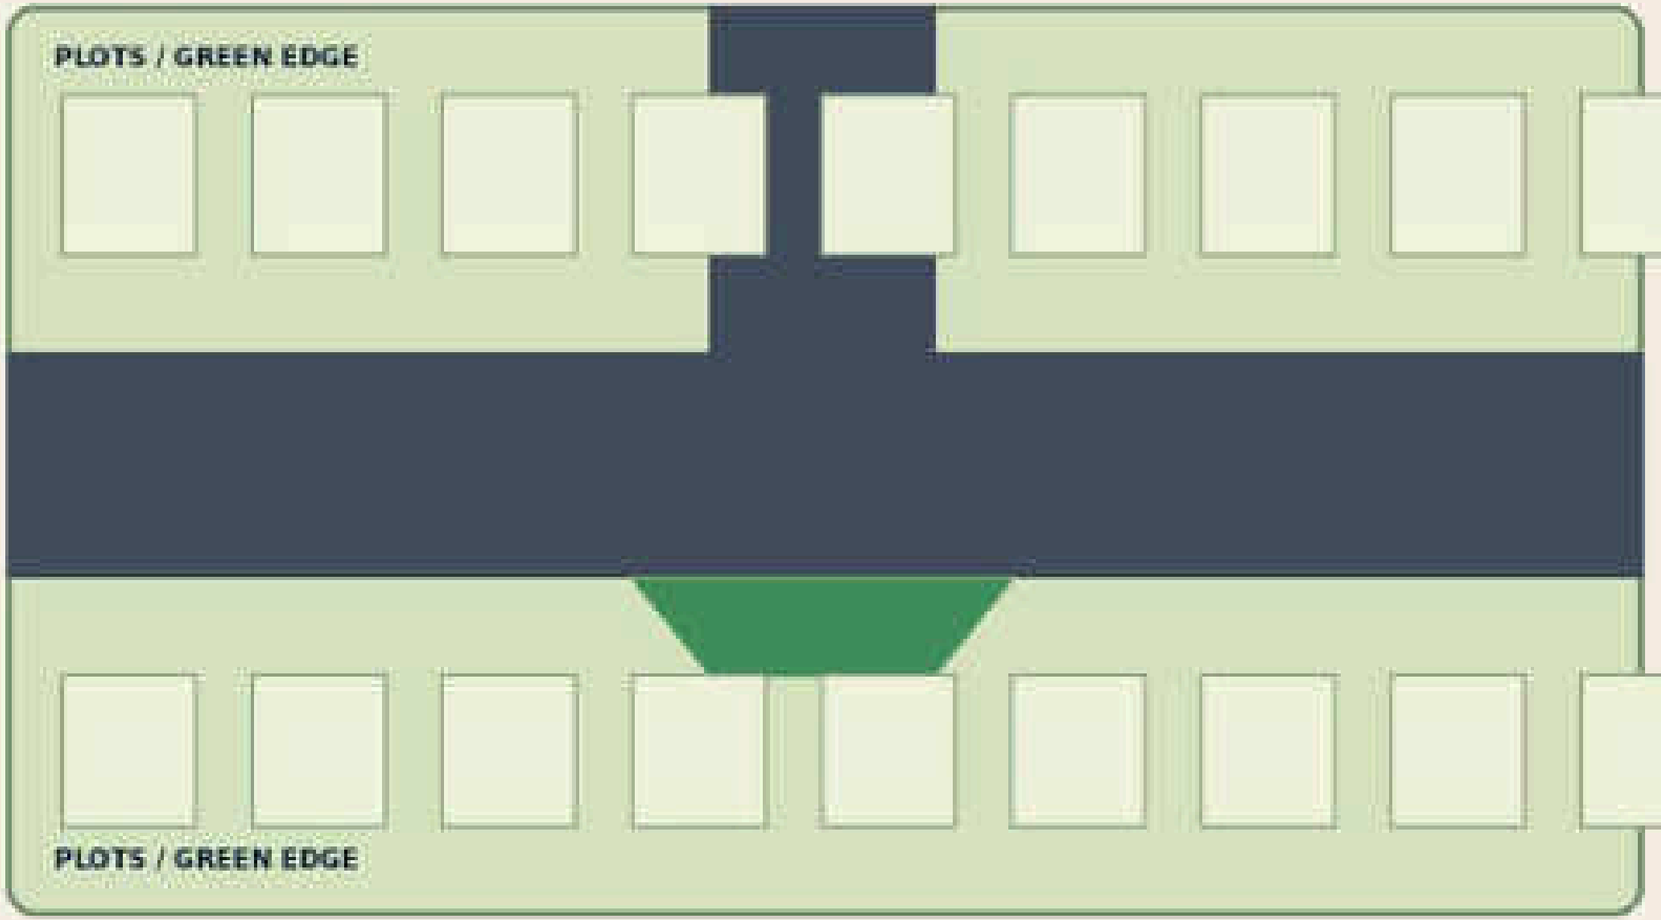


DESIGN INTENT

- Clear sight triangles
- Safe pedestrian crossing
- Emergency turning path
- Native shade and lighting
- No water feature in road band

PEDESTRIAN SPINE - P3

Cycle and pedestrian priority through the green network.

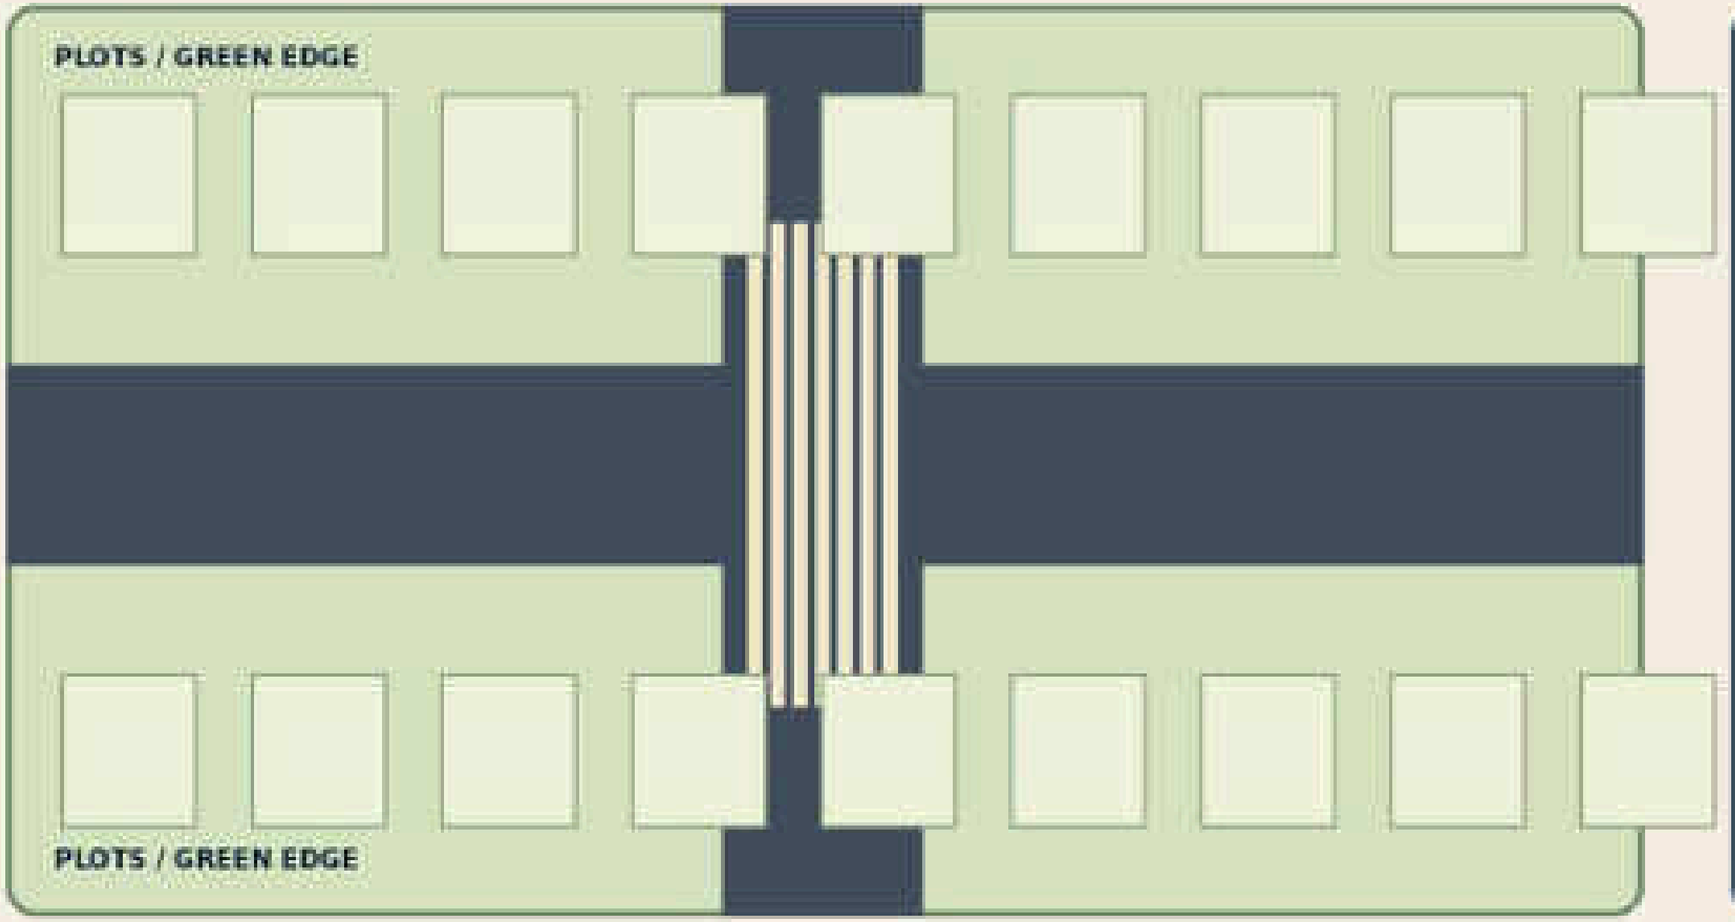


DESIGN INTENT

- Clear sight triangles
- Safe pedestrian crossing
- Emergency turning path
- Native shade and lighting
- No water feature in road band

PARK LOOP - P4

R04 loop keeps the sports edge quiet and legible.

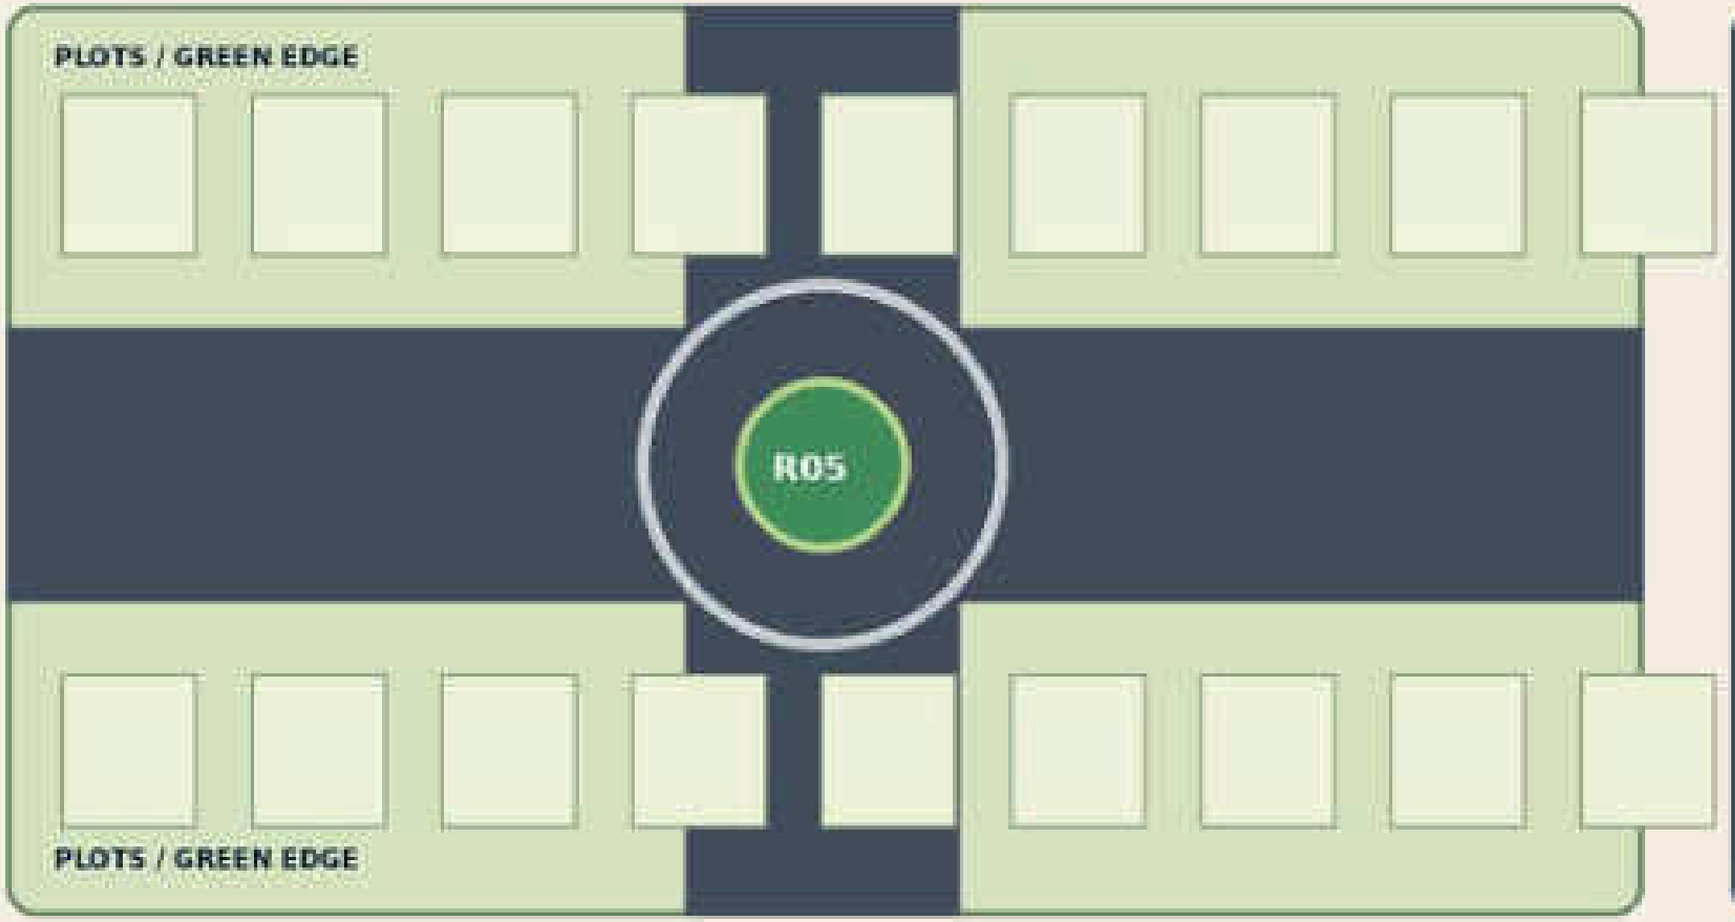


DESIGN INTENT

- Clear sight triangles
- Safe pedestrian crossing
- Emergency turning path
- Native shade and lighting
- No water feature in road band

CLUBHOUSE DROP-OFF - P5

Arrival circle points toward the internal aquatic precinct

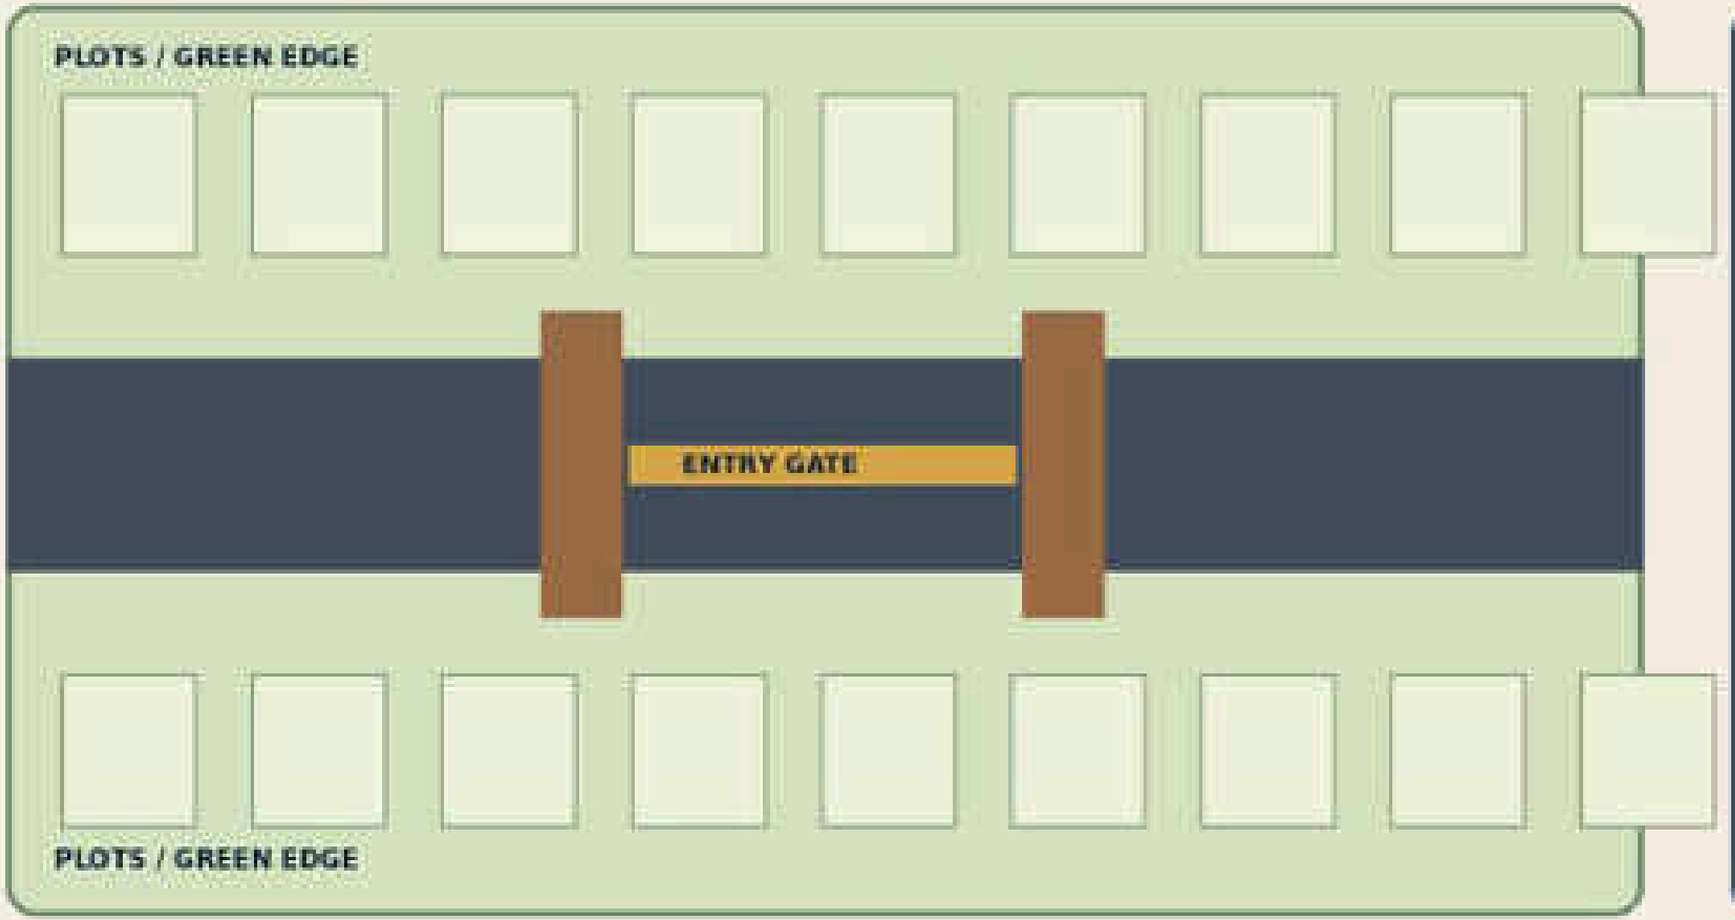

DESIGN INTENT

- Clear sight triangles
- Safe pedestrian crossing
- Emergency turning path
- Native shade and lighting
- No water feature in road band

P1 GREEN ARRIVAL

Internal arrival path with the aquatic precinct held behind landscape.



ACCESS LOGIC

01 **Internal lake edge**
Water remains inside the approved aquatic precinct.

02 **Promenade**
Shaded, accessible and separated from plot streets.


03 **Boundary**
Tree berms and walls block external water context.

04 **P5 only**



P1 WATERFRONT GATEWAY

Controlled threshold and boundary planting before the lake edge.

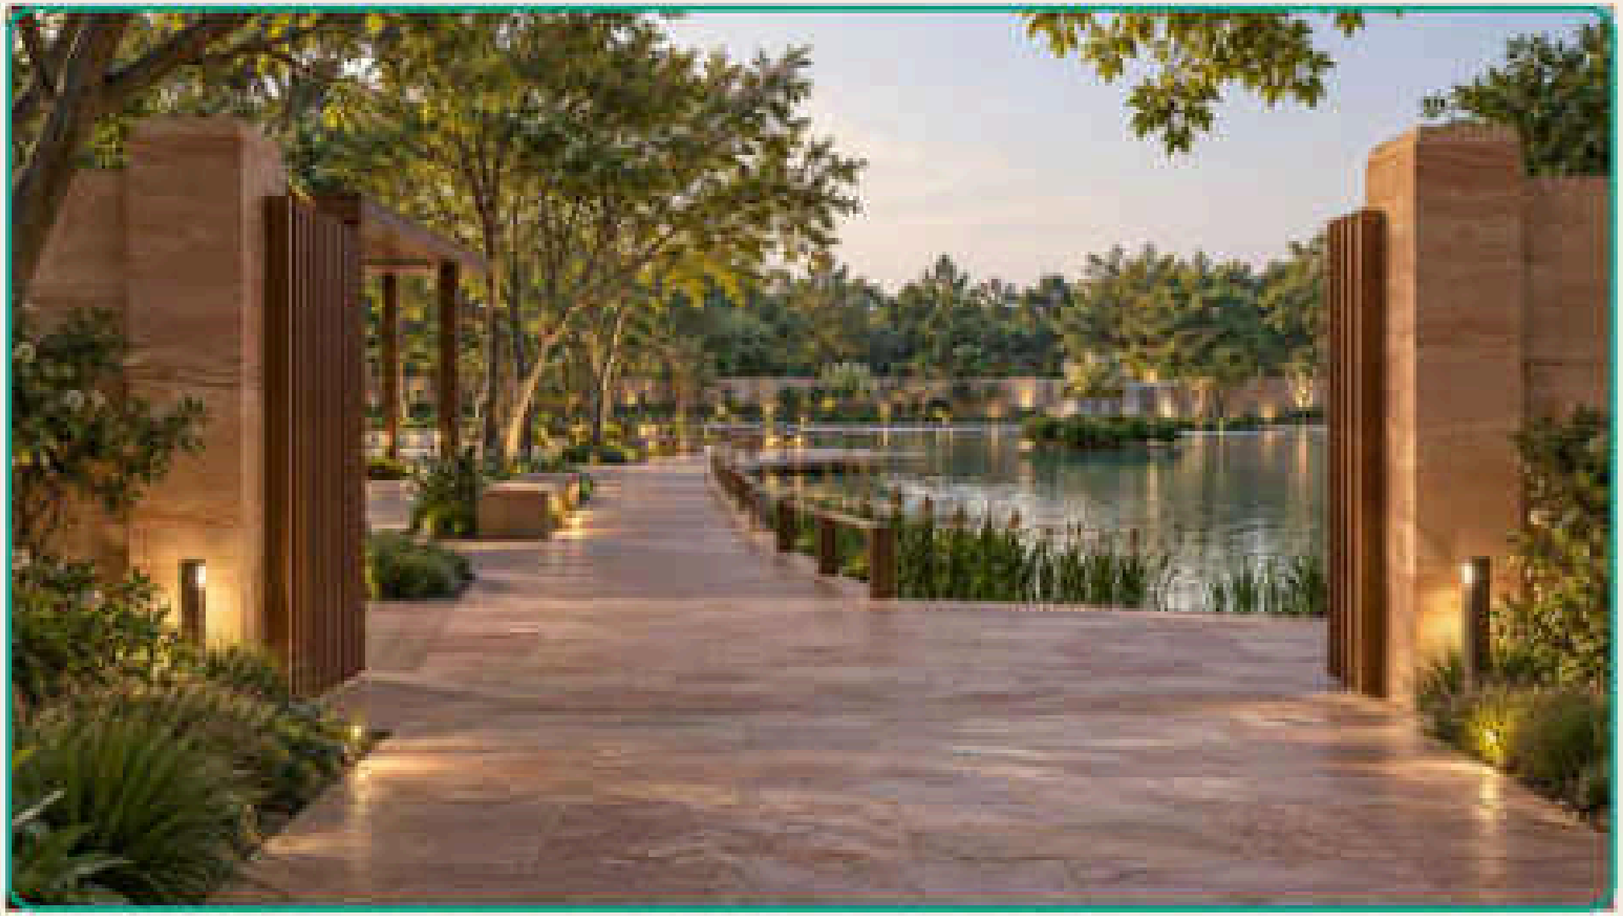

ACCESS LOGIC

01 **Internal lake edge**
Water remains inside the approved aquatic precinct.

02 **Promenade**
Shaded, accessible and separated from plot streams.

03 **Boundary**
Tree berms and walls block external watercontext.

04 **P5 only**



P2 BOARDWALK

Boardwalk, shade and seating remain within the internal lake parcel.



ACCESS LOGIC

01 **Internal lake edge**
Water remains inside the approved aquatic precinct.

02 **Promenade**
Shaded, accessible and separated from plot streets.

03 **Boundary**
Tree berms and walls block external water context.

04 **P5 only**



P2 ACCESSIBLE RAMP

Universal access route with a clear internal edge condition.



ACCESS LOGIC

01 **Internal lake edge**
Water remains inside the approved aquatic precinct.

02 **Promenade**
Shaded, accessible and separated from plot streets.

03 **Boundary**
Tree berms and walls block external water context.


04 **P5 only**



© concept visualisation. All external context, internal layouts and plot forms are indicative.

P3 BRIDGE CROSSING

Internal bridge and park path, separated from the HT corridor.

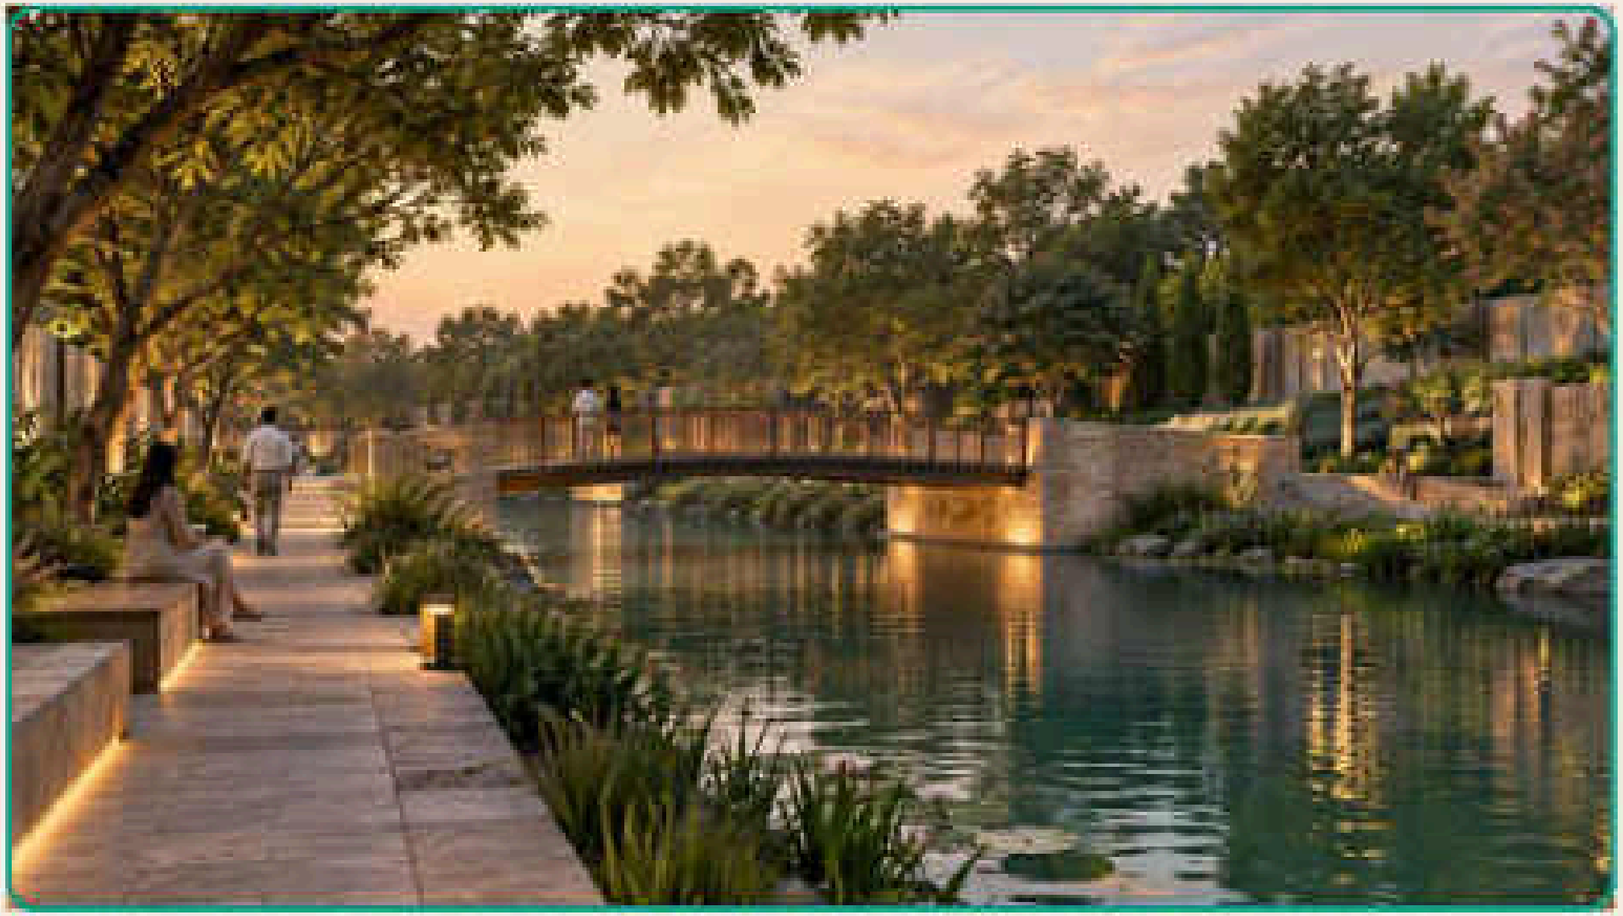

ACCESS LOGIC

01 Internal lake edge
Water remains inside the approved aquatic precinct.

02 Promenade
Shaded, accessible and separated from plot streets.


03 Boundary
Tree berms and walls block external watercontext.

04 P5 only



P3 NATURE LEARNING

Bird habitat and learning landscape inside the aquatic precinct.

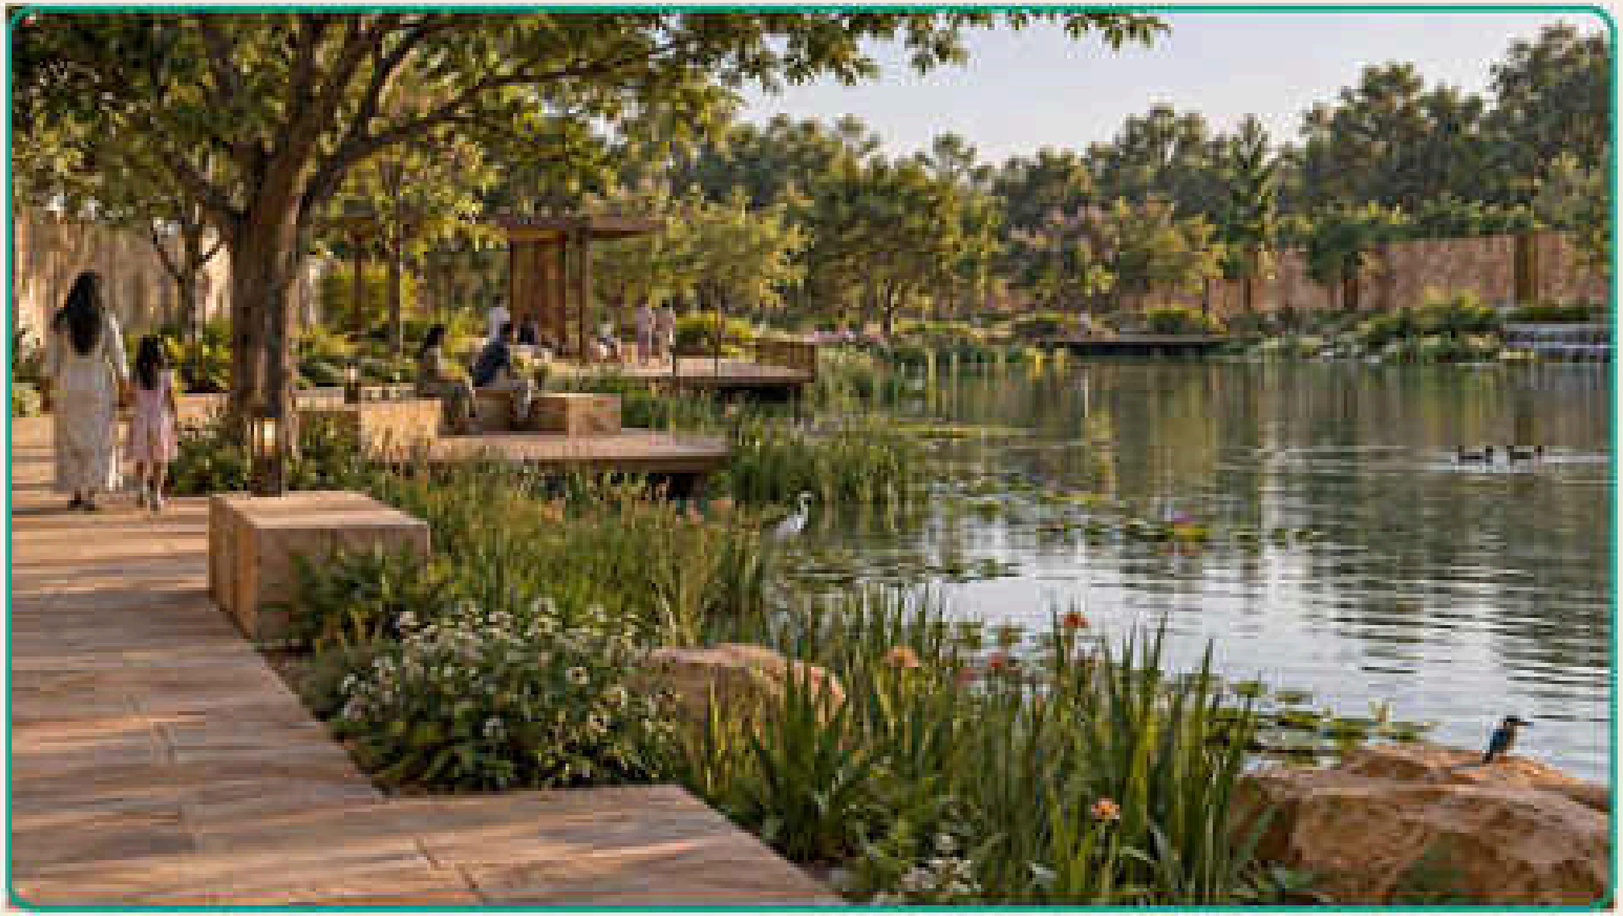

ACCESS LOGIC

01 Internal lake edge
Water remains inside the approved aquatic precinct.

02 Promenade
Shaded, accessible and separated from plot streets.

03 Boundary
Tree berms and walls block external water context.

04 P5 only



© Concept visualisation. All external context shown is indicative only. All rights reserved.

P4 QUIET PROMENADE

A calm lake walk with residential plots kept beyond the park road.



ACCESS LOGIC

01 **Internal lake edge**
Water remains inside the approved aquatic precinct.

02 **Promenade**
Shaded, accessible and separated from plot streets.

03 **Boundary**
Tree berms and walls block external water/context.

04 **P5 only**
[illegible] controlled.



P4 RAIN GARDEN

Dry planted rain-garden terraces feed the engineered lake only.



ACCESS LOGIC

01 Internal lake edge
Water remains inside the approved aquatic precinct.

02 Promenade
Shaded, accessible and separated from plot streets.

03 Boundary
Tree berms and walls block external water/context.

04 P5 only



P5 CLUBHOUSE ARRIVAL

Clubhouse, bridge and internal lake form the destination sequence.



ACCESS LOGIC

01 Internal lake edge
Water remains inside the approved aquatic precinct.

02 Promenade
Shaded, accessible and separated from plot streets.

03 Boundary
Tree berms and walls block external water/context.

04 P5 only
[illegible] controlled.



[illegible]

P5 LAKE AT NIGHT

Warm lighting and a contained internal lake promenade.



ACCESS LOGIC

01 Internal lake edge
Water remains inside the approved aquatic precinct.

02 Promenade
Shaded, accessible and separated from plot streets.

03 Boundary
Tree berms and walls block external water/context.

04 P5 only

